




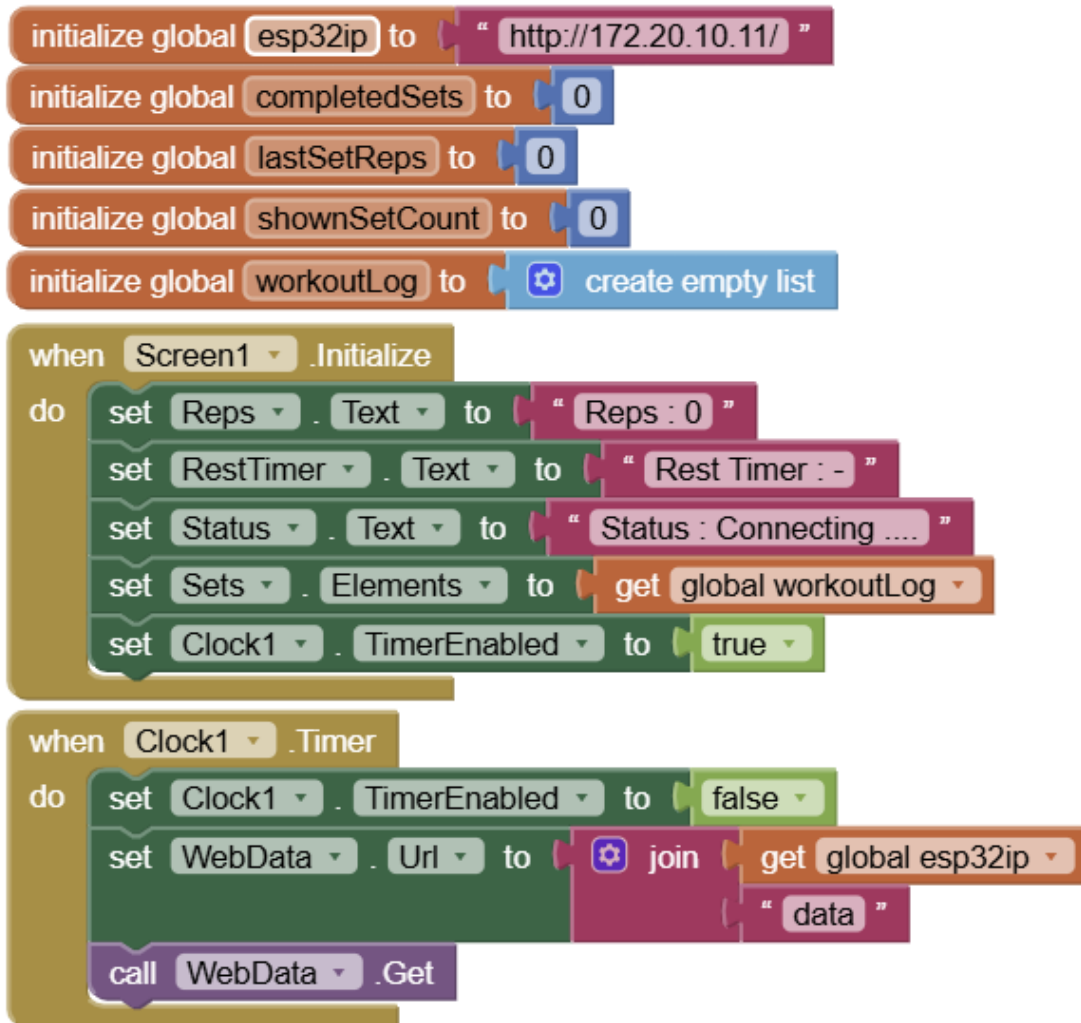

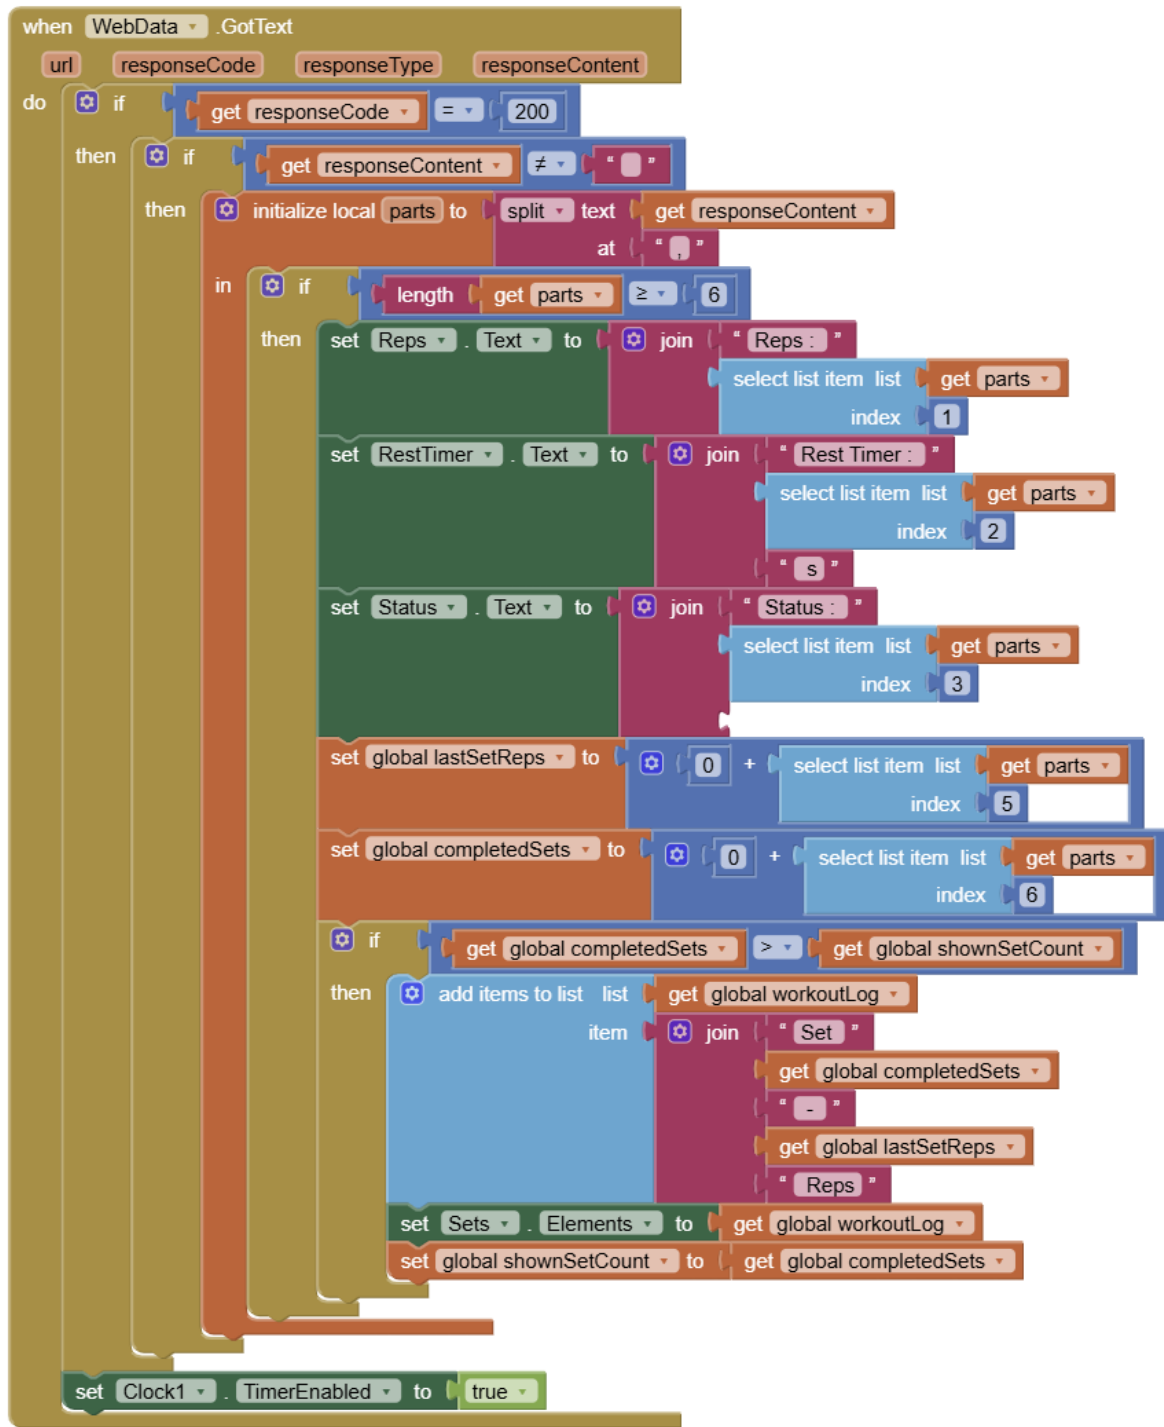

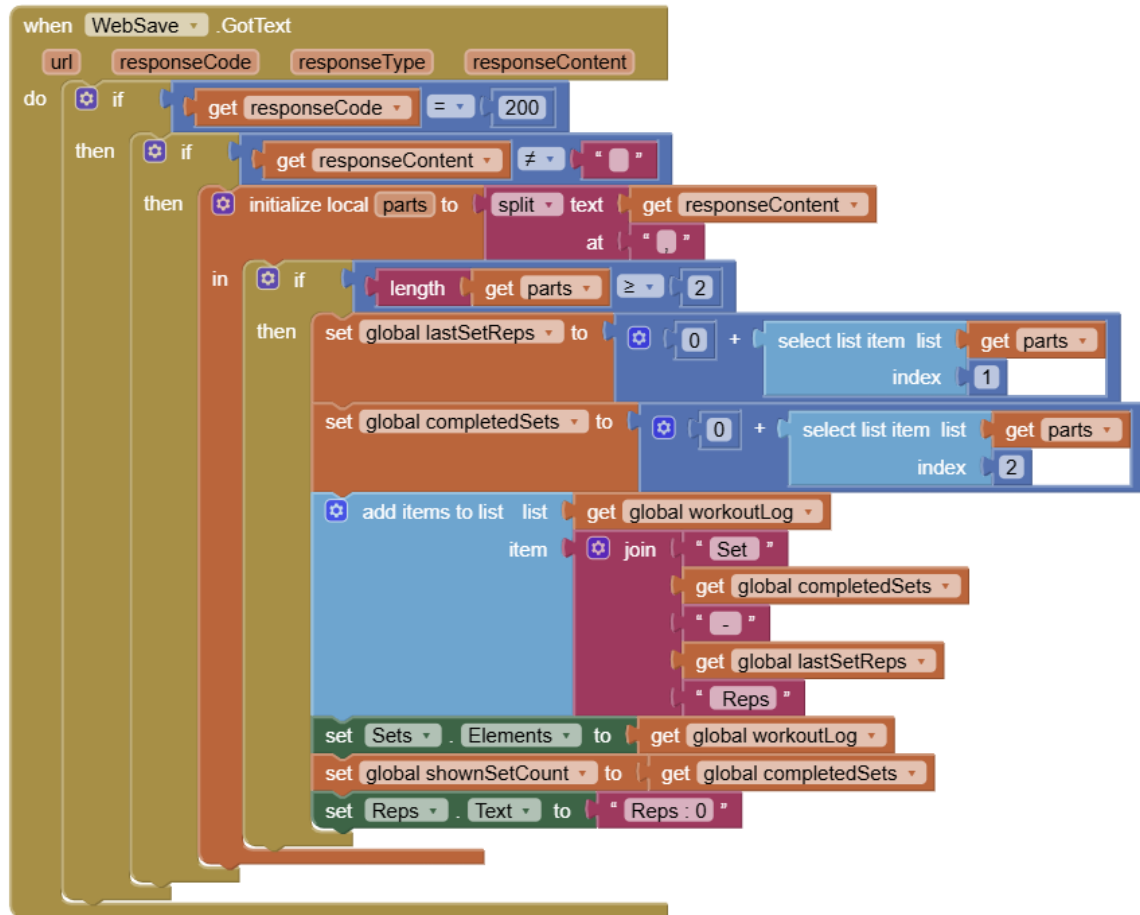

```
when ForceStart .Click
do
  set WebForceStart . Url to [join [get global esp32ip [force_start]]]
  call WebForceStart .Get
```

```
when Reset .Click
do
  set WebReset . Url to [join [get global esp32ip [reset]]]
  call WebReset .Get
  set global lastSetReps to 0
  set global workoutLog to [create empty list]
  set global shownSetCount to 0
  set Reps . Text to [Reps : 0]
  set RestTimer . Text to [Rest Timer : -]
  set Status . Text to [Status : IDLE]
  set global completedSets to 0
```

```
when Save .Click
do
  if [Reps . Text] ≠ [Reps : 0]
  then
    set WebSave . Url to [join [get global esp32ip [save_set]]]
    call WebSave .Get
```