

## Admin

**POST****/sendAdminRequest**

Create admin user

**Parameters**[Try it out](#)

Name	Description
------	-------------

body	Create admin user
------	-------------------

(body)

[Example Value](#) | [Model](#)

```
{  "dateOfBirth": "string",  "personalFirstName": "string",  "personalLastName": "string",  "personalMiddleName": "string",  "personalNumberOfPassport": "string",  "personalPhoneNumber": "string"}
```

Parameter content type

application/json

**Responses**

Response content type

application/json

Code	Description
------	-------------

200	Admin uses is created
-----	-----------------------

[Example Value](#) | [Model](#)

```
{  "staffid": 0}
```

Elements

Console

Sources

Network

Performance

Memory

Application

Security

Lighthouse

Preserve log

Disable cache

3G

Filter

Invert

More filters

All

Fetch/XHR

Doc

CSS

JS

Font

Img

Media

Manifest

WS

Wasm

Other

5,000 ms

10,000 ms

15,000 ms

20,000 ms

25,000 ms

30,000 ms

35,000 ms

40,000 ms

45,000 ms

Name	Headers	Payload	Preview	Response	Initiator	Timing	Cookies
▼ General							
Request URL:		https://regoffice.senla.eu/sendAdminRequest					
Request Method:		POST					
Status Code:		200 OK					
Remote Address:		86.57.161.116:443					
Referrer Policy:		strict-origin-when-cross-origin					
▼ Response Headers							
Access-Control-Allow-Origin:		*					

Elements

Console

Sources

Network

Performance

Memory

Application

Security

Lighthouse

Preserve log

Disable cache

3G

Filter

Invert

More filters

All

Fetch/XHR

Doc

CSS

JS

Font

Img

Media

Manifest

WS

Wasm

Other

5,000 ms

10,000 ms

15,000 ms

20,000 ms

25,000 ms

30,000 ms

35,000 ms

40,000 ms

45,000 ms

Name	Headers	Payload	Preview	Response	Initiator	Timing	Cookies
▼ Request Payload							
{personalLastName: "Ivanov", personalFirstName: "Ivan", personalMiddleName: "Ivanovich",...}							
dateOfBirth: "2000-12-12"							
personalFirstName: "Ivan"							
personalLastName: "Ivanov"							
personalMiddleName: "Ivanovich"							
personalNumberOfPassport: "мип12587"							
personalPhoneNumber: "89999999999"							

Send

## Cookies

## Beautify



 Save Response 

```
11 </body>
12
13 </html>
```

Send

## Cookies

Beautify



 Save Response 

8

POST

/requestProcess

Change status of application

Parameters

Try it out

Name	Description
body (body)	Application which status we want to change
	Example Value   Model
	<pre>{   "applId": 0,   "staffId": 0,   "action": "string" }</pre>
	Parameter content type
	application/json

Responses

Response content type application/json

Code	Description
200	Status of application is changed
	Example Value   Model
	<pre>{   "applicantid": 0,   "applicationid": 0,   "citizenid": 0,   "dateofapplication": "string",   "kindofapplication": "string",   "statusofapplication": 0,   "staffid": 0 }</pre>

HTTP

Admin / requestProcess

Save

Share

POST

{{base\_url}}/requestProcess

Send

ParamsAuthorizationHeaders (10)BodyScriptsSettingsCookies

noneform-datax-www-form-urlencodedrawbinaryGraphQLJSON

```
1 {
2   "applId": 44946,
3   "staffId": 23893,
4   "action": "approved"
5 }
```


BodyCookiesHeaders (11)Test Results (1/1)200 OK43 ms731 BSave Response

JSON

PreviewVisualize

```
1 {
2   "data": {
3     "applicationid": 44946,
4     "citizenid": 46606,
5     "applicantid": 53211,
6     "staffid": 23893,
7     "dateofapplication": "2025-01-29T16:42:38.091Z",
8     "kindofapplication": "Получение свидетельства о смерти",
9     "statusofapplication": "approved",
10    "channel": "unknown",
11    "image": null
12  },
13   "requestId": "cae12d03-4d87-4060-8c8b-36717fc0bd7c"
14 }
```

Отличия в выводе ответа - разное количество полей на выход.

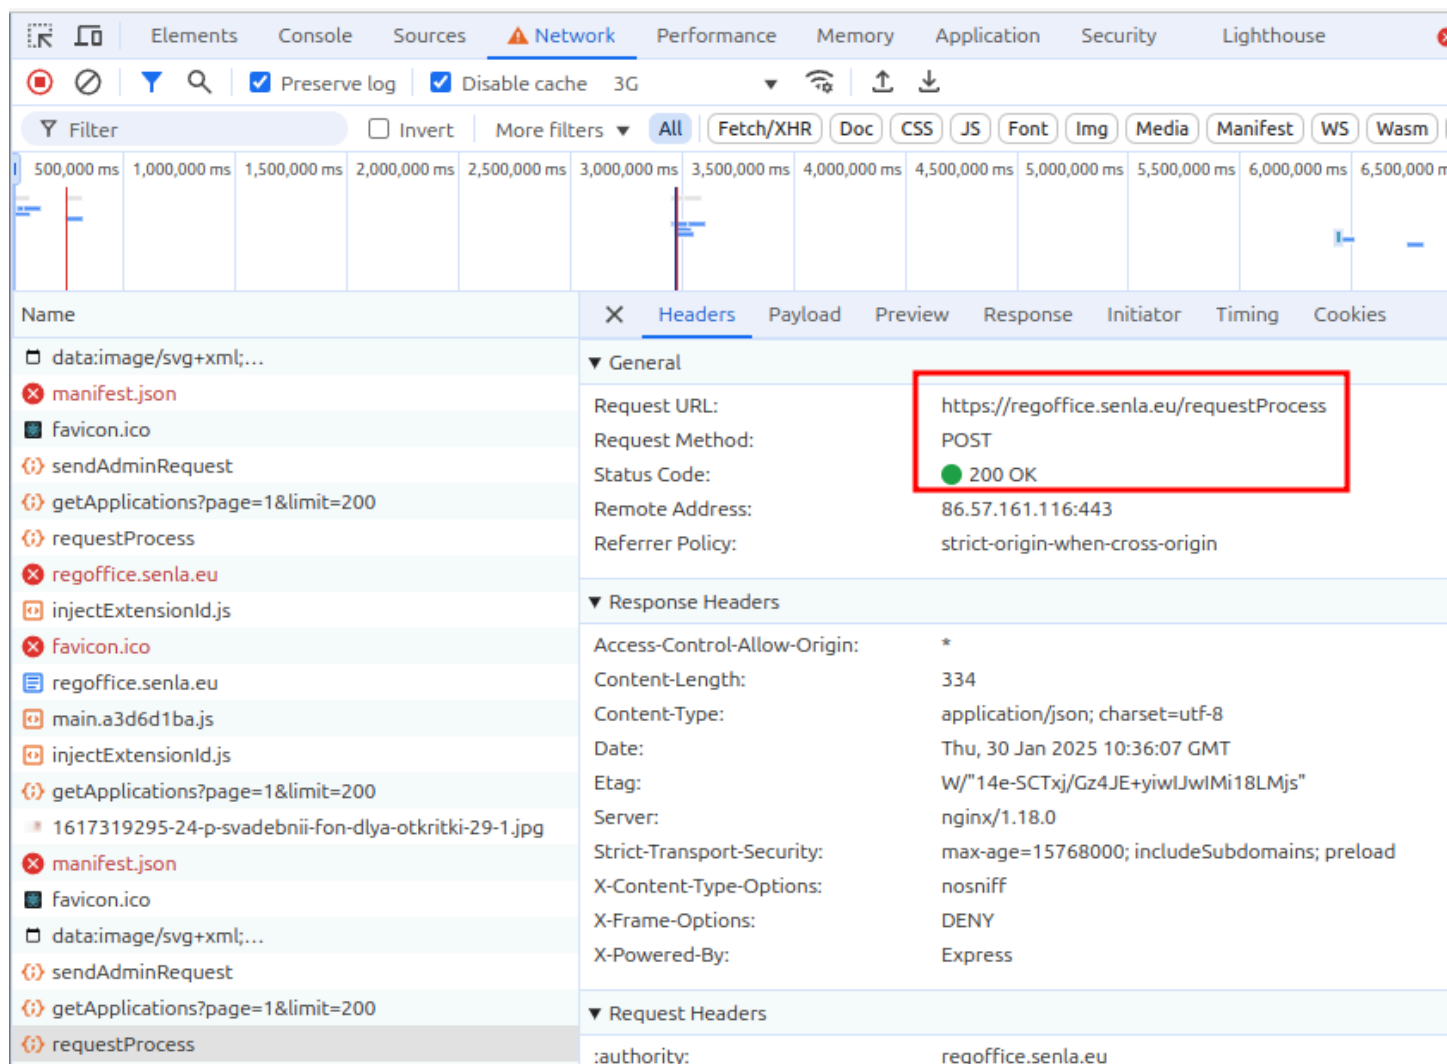

Elements Console Sources **Network** Performance Memory Application Security Light

☐ ☐ ☒ Filter ☐ Invert More filters **All** Fetch/XHR Doc CSS JS Font Img Media Mani

500,000 ms 1,000,000 ms 1,500,000 ms 2,000,000 ms 2,500,000 ms 3,000,000 ms 3,500,000 ms 4,000,000 ms 4,500,000 ms 5,000,000 ms 5,500,000 ms 6,000,000 ms

Name	Headers	Payload	Preview	Response	Initiator	Timing
data:image/svg+xml;...						
manifest.json						
favicon.ico						
sendAdminRequest						
getApplications?page=1&limit=200						
requestProcess						
regoffice.senla.eu						
injectExtensionId.js						
favicon.ico						
regoffice.senla.eu						
main.a3d6d1ba.js						
injectExtensionId.js						
getApplications?page=1&limit=200						
1617319295-24-p-svadebnii-fon-dlya-otkritki-29-1.jpg						
manifest.json						
favicon.ico						
data:image/svg+xml;...						
sendAdminRequest						
getApplications?page=1&limit=200						
requestProcess						

**Request Payload** view source

```
{applId: 44946, staffid: 23894, action: "rejected"}
  action: "rejected"
  applId: 44946
  staffid: 23894
```

**GET** /getApplications Get all applications Try it out

Parameters

No parameters

Responses Response content type application/json

Code	Description
200	Applications are found

Example Value | Model

```
{
  "applicantid": 0,
  "applicationid": 0,
  "citizenid": 0,
  "dateofapplication": "string",
  "kindofapplication": "string",
  "statusofapplication": 0,
  "staffid": 0
}
```

GETgetapplications

+

▼

ZAGS

▼

Application / getapplications

Save

Share

GET

▼

{{base\_url}}/getApplications

Send

▼

Params

Authorization

Headers (9)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	Bulk Edit
	Key	Value	Description	

Body

Cookies

Headers (11)

Test Results (1/1)

200 OK

429 ms

55 KB

Save Response

JSON

Preview

Visualize

1

{

2

"total": "8892",

3

"data": [

4

{

5

"applicationid": 44951,

6

"citizenid": 46611,

7

"applicantid": 53216,

8

"staffid": null,

9

"dateofapplication": "2025-01-30T15:16:58.909Z",

10

"kindofapplication": "Получение свидетельства о браке",

11

"statusofapplication": "under consideration",

12

"channel": "web",

13

"image": null

14

},

15

{

16

"applicationid": 44950,

17

"citizenid": 46610,

18

"applicantid": 53215,

19

"staffid": 23895,

20

"dateofapplication": "2025-01-30T13:57:55.398Z",

21

"kindofapplication": "Получение свидетельства о браке",

GET

getApplStatus/{applicationId}

Get application with given ID

Parameters

Try it out

Name	Description
<div><div>applicationId * required</div><div>integer</div><div>(path)</div></div>	ID of application that we want to find

applicationId - ID of application that we want

Responses

Response content type application/json

Code	Description
200	Application is found

Example Value | Model

```
{  "applicantid": 0,  "dateofapplication": 0,  "kindofapplication": 0,  "statusofapplication": 0}
```

HTTP Application / getApplStatus

Save

Share

GET

{{base\_url}}/getApplStatus/{44951}

Send

Params

Authorization

Headers (8)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	Bulk Edit
	Key	Value	Description	

Body

Cookies

Headers (8)

Test Results (0/1)

500 Internal Server Error

279 ms

336 B

Save Response

{ } JSON

Preview

Visualize

```
1 {
2   "code": "error",
3   "message": "SequelizeDatabaseError"
4 }
```

GET

`{{base_url}}/getApp1Status?applicationid=44951`

Send

Params • Authorization Headers (8) Body Scripts • Settings

Cookies

## Query Params

<input checked="" type="checkbox"/>	Key	Value	Description	...	Bulk Edit
<input checked="" type="checkbox"/>	applicationid	44951			
	Key	Value	Description		

Body Cookies Headers (10) Test Results (0/1) ↻

404 Not Found

• 263 ms • 475 B •



Save Response



HTML

Preview

Visualize



```
1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5   <meta charset="utf-8">
6   <title>Error</title>
7 </head>
8
9 <body>
10   <pre>Cannot GET /getApp1Status</pre>
11 </body>
12
13 </html>
```