

# Cascading Style Sheets (I)

CSS 樣式表  
Getting Start

# What is CSS

- CSS (Cascading Style Sheets)
- A style sheet is a set of stylistic **CSS rules** that tell a browser how the HTML document are **presented**.
- CSS is a means to **separate the presentation from the HTML content** by controlling the appearance of content
- demo: [http://www.w3schools.com/css/demo\\_default.htm](http://www.w3schools.com/css/demo_default.htm)
- 特點
  - 豐富的樣式, 容易設定
  - 網頁文件簡潔
  - **reusability 重覆使用** **可讓不同網頁套用樣式**
  - cascade 階層性

# CSS Version

- <http://www.w3.org/Style/CSS/>
- CSS Level 2 (CSS 2)
  - 1998-May-12 W3C Recommendation
  - 2008-April revised 11
- CSS Level 2 Revision 1 (CSS 2.1)
  - 2009-April-23 W3C Candidate Recommendation
  - <http://www.w3.org/TR/CSS21/>
- CSS Level 3
  - builds on CSS Level 2 module by module, using the CSS2.1 specification as its core. adds functionality and/or replaces part of the CSS2.1 specification.

# Where you define the CSS rules

- There are three ways to add CSS rules to web pages

## ① ■ inline

- use the *style* attribute in the HTML tag
- e.g. `<p style="font-size: 24pt;">`

## ② ■ embedded (internal style) *style*基本上要寫在 *head* 中 (且寫在要出現目標前)

- `<style...>...</style>` 放 *html* 檔案上

## ③ ■ linked from a separate CSS style sheet (external style)

- e.g. `<link rel="stylesheet" type="text/css" href="file.css" />`
- e.g. `<style...>@import url("file.css");</style>`

# Simple Example

- <html><head> <title>Example</title> </head>  
    <bod**Y** style="background-color: #FF0000;">  
        <p>This is a red page</p>  
    </bod**Y**>  
  </html>
- <html>  
  <head> <title>Example</title>  
  <style type="text/css">  
    body {background-color: #FF0000;}  
  </style>  
  </head>  
  <body><p>This is a red page</p></body>  
  </html>

# Inline Style

- use the style attribute in the HTML tag
- e.g. [c0-inline.html](#)

< p > This paragraph simply takes on the browser's default paragraph style </ p >

< p style = " font-size: 24pt; font-weight:bold; font-style:italic; color:red; " > By adding inline CSS style to this paragraph, we can override the default styles. </ p >

< p > And now we are back to a regular default paragraph without any inline styles. </ p >



# Embedded Style

- embed the styles in the head of the HTML document
- The scope of embedded styles is limited to the page that contains the styles
- e.g. [c0-embed.html](#)

定義 `<h2>` 標籤樣式為 36px 的藍色粗體字

- ```
<style type="text/css">
  h2 { font-size: 36pt; font-weight:bold; color: blue; }
</style>
```

# Linked Style

- Place styles in a **separate document** that links to multiple pages so that the styles can be shared.
- e.g. [link.html](#)

引用儲存於 link.css 檔中的 CSS 定義

- `<link rel="stylesheet" type="text/css" href="link.css" />`

- e.g.

```
<style type="text/css">  
@import url('link.css'); // @import 必須出現在其他 CSS rule 之前
```

....

```
</style>
```

```
1  <!DOCTYPE html>
2  <html>
3  <head>
4      <meta charset="utf-8">
5      <title>我的首頁</title>
6      <link rel="icon" type="image/x-icon" href="logo.ico">
7      <!--link rel="stylesheet" type="text/css" href="homepage.css"-->
8      <style>
9          @import url("homepage.css");
10         body { color: white; }
11     </style>
12 </head>
13 <body>
14     <header>
15         <h1>美人的首頁</h1>
16     </header>
17     <nav>
18         <a href="#">關於我</a>
19         <a href="#">作業一</a>
20         <a href="#">作業二</a>
21         <a href="http://google.com/">網路資源</a>
22     </nav>
23     <main>
24         <section>
25             
26         </section>
27     </main>
28 </body>
29 </html>
```


會議裏所有文字統統白色

# CSS Rules

# CSS Rule 1/2 內圈是否會繼承而來的要求(有自己設定會繼承嗎?)

- A CSS rule is made up of two parts:
  - selector: states which tag the rule selects
  - declaration: states what happens when the rule is applied
- The declaration itself is made up of two elements:
  - property: states what is to be affected
  - value: states what the property is set to

Declaration 後方; P09用: P09

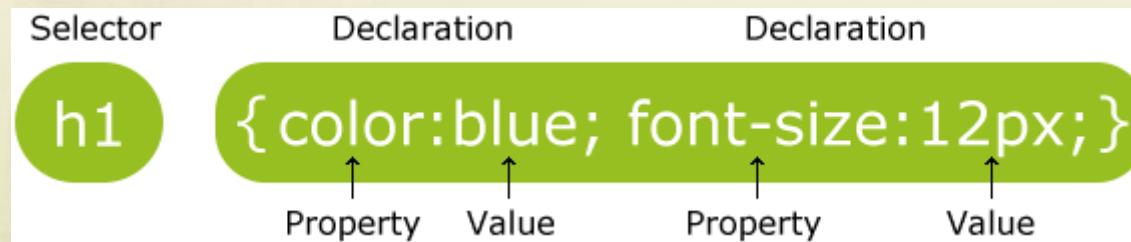

source:www.w3schools.com

# CSS Rule 2/2

- multiple declarations can be contained within a rule.
- each declaration ends with a semicolon.
- e.g.

```
p { color:red; font-size:12px; line-height:15px; }
```
- comment
  - /\* .... \*/ [塊級注解]

# Selector Types

1. Type/Element/Tag Selector
2. Grouped Selector
3. Universal Selector
4. Class Selector
5. ID Selector
6. Attribute Selector
7. Descendant Selector
8. Child Selector
9. Adjacent Sibling Selector
10. General Sibling Selector

# T1: Type/Element/Tag Selector

- be applied to document language element type (such as HTML tag)
- e.g. The following rule matches all `<h1>` elements
  - `h1 { font-family: "標楷體" }`

對象 (非標籤名決定)

# T2: Grouped Selector

- selectors can be grouped
- e.g.

```
h1 { font-family: "標楷體"; }
```

```
h2 { font-family: "標楷體"; }
```

```
h3 { font-family: "標楷體"; }
```

```
h4 { font-family: "標楷體"; }
```

```
h5 { font-family: "標楷體"; }
```

```
h6 { font-family: "標楷體"; }
```

equivalent to

```
h1, h2, h3, h4, h5, h6 { font-family: "標楷體"; }
```

# T3: Universal Selector

- The universal selector, written `"*"`, matches any single element in the document.
- e.g.  
`* { color: red; } /* the color of all text is red. */`
- If the universal selector is not the only component of a selector, the `"*"` may be omitted

# Text Style

# Text Font Style

- font 設定字型的全部屬性
  - [ [ <'font-style'> || <'font-variant'> || <'font-weight'> ]? <'font-size'> [ / <'line-height'> ]? <'font-family'> ] | caption | icon | menu | message-box | small-caption | status-bar | inherit
  - font-stretch 字型寬窄 (**deprecated**)
  - font-size-adjust 字型高度(**deprecated**)

# font-family 字型

- font-family: [[ <family-name> | <generic-family> ] [, <family-name>| <generic-family>]\* ] | inherit
  - e.g. body { font-family: Gill, Helvetica, sans-serif; }
  - e.g. h1 {font-family: "Lucida Calligraphy", Verdana, serif;}  
    value是字符串要用引號(如果只有一字可不加)
  - e.g. p {font-family: "Monotype Corsiva", Arial;}
  - e.g. h2, h3 {font-family: sans-serif;}

—— 三聖山監大用 unicode 解譯  
工力肯近方々 <metq charset="utf-8">

# Generic Font 通用字型

- 為了保證瀏覽裝置能夠正確地顯示您的字型，您應該在 font-family 屬性值的最後面加上一個通用字型。通用字型不需以引號包含起來。
  - serif 附有襯線的比例字型
    - e.g. Times, Garamond, New Century, Schoolbook
  - sans-serif 沒有襯線的比例字型
    - e.g. Helvetica, Geneva, Verdana, Arial, Univers
  - monospace 非比例字型(字元寬度一致)
    - Courier, Courier New, Andale Mono
  - cursive 模仿手寫的字型 (草寫字)
    - e.g. Chancery, Author, Comic Sans
  - fantasy 其他 (創意字)
    - e.g. Western, Woodblock, Klingon

# 中英文不同字體

英文字體寫在中文字體前面

e.g. h1 { font-family: "Times New Roman", "標楷體"; }

# Google Free Fonts - Noto

- **noto: no more tofu(豆腐)**
- 支援所有 Unicode 編碼字元
- <https://www.google.com/get/noto/>
  - Noto Sans CJK (思源黑體 Pan-CJK)
    - comprehensively covers Traditional Chinese, Simplified Chinese, Japanese, and Korean in a unified font family.
      - 正體中文 Noto Sans CJK TC
    - 含七種粗細: ExtraLight, Light, Regular, Medium, SemiBold, Bold, Black
  - <https://www.google.com/get/noto/#sans-hant>
- e.g. <text/font-google.html>

```
6 <link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Lemon">
7 <link rel="stylesheet" href="http://fonts.googleapis.com/earlyaccess/notosanstc.css">
8 <style>
9   .lemon {
10     font-family: 'Lemon', sans-serif;
11   }
12   .noto {
13     font-family: 'Noto Sans TC', sans-serif;
14 }
15 </style>
16 </head>
17 <body>
18 <h1>我的標題</h1>
19 <h1 class="lemon">Lorem ipsum dolor sit amet.
```

引用網址就可以用網上字體  
(或可用內建的)

# note: @charset

- specifies the character encoding used in the style sheet (external style sheet only)
  - useful when using non-ASCII characters in some CSS properties, e.g. { font-family: "標楷體"; }
- It must be the first element in the style sheet and not be preceded by any character;
- It can be defined only once.
- e.g. @charset "utf-8";

# font-size

- 您使用font-size屬性來指定字型的大小，例如：

- `h1 {font-size: x-small;}`
- `h2, h3 {font-size: larger;}`
- `p {font-size: 3.5em;}`
- `p {font-size: 220%;}`

# absolute font size 絶對字型大小

- [ xx-small | x-small | small | medium | large | x-large | xx-large ]
- default: medium
- 這些字型大小沒有精確的定義，而是取相對於彼此的比例而定。
  - CSS 1 使用1.5的比例值
  - CSS 2.1使用1.0~1.2的比例值。
  - 如果medium是16像素的話，large大約會是19像素(16像素的1.2倍)，small大約會是13像素。請參考abs-font-size.html。
- e.g. [text/font-size-abs.html](#)

# relative font size 相對字型大小

- relative to the font size of the parent element
- [ larger | smaller ]
- 使用與絕對字型大小相同的比例值
- e.g. 父物件的字型大小是 medium 
  - 子物件設定 larger，子物件的大小就是 large
  - 子物件設定 smaller，子物件的大小就是 small
- e.g. 父物件的字型大小是 large
  - 子物件設定 larger，子物件的大小就是 x-large
  - 子物件設定 smaller，子物件的大小就是 medium
- e.g. [text/font-size-rel.html](#)

# explicit size - 絶對單位

直接明確指定字型大小文字

可用絕對長度單位

- pt: point，傳統上的印刷用單位，1點等於1/72英吋(72ppi)，但目前螢幕少則96ppi，多則甚至達到120ppi
  - e.g. `p { font-size: 12pt }`
- pc: pica,  $1pc = 12pt$
- cm (centimeters)
- mm (millimeters)
  - e.g. `p { font-size: 15mm }`
- in (inches)
- e.g. [text/font-size-explicit.html](#)

# explicit size - 相對長度單位

- px: pixel, CSS 規格文件建議像素大小為 96ppi
  - e.g. `p { font-size: 16px }`
- em, rem(root em)
  - 字型中大寫字母M的高度(也等於寬度)
  - $1\text{em} = \text{font-size}$  值 = 1個M寬度(和上一個字體量縮進後下來的為基準)
  - e.g. `p { font-size: 1.5em }`
  - rem: relative to font-size of the root element
- ex
  - 字型裏小寫字母 x 的高度，不同字型，高度會不同
  - 1ex大約是1em的一半
- ch: relative to width of the "0" (zero)

# explicit size - 百分比例

- %: 相對於父物件的字型百分比例

- e.g.

```
<style type="text/css">  
  body {font-size: 32px;}  
  ul { font-size: 75% }  
</style>
```

- e.g. [text/font-size-percent.html](#)
- vh, vw: 螢幕可視範圍高度/寬度的百分比
  - e.g. width:20vw; height:20vw
  - vmin: min(view height, view width)
  - vmax: max(view height, view width)

# note: `window.devicePixelRatio`

- 軟體 pixel 與硬體 pixel 的比率, e.g.  $dpr = 2$ , 則 1px 相當於硬體上的 2x2 點
- $dpr$  取決於實體解析度、系統設定、瀏覽器縮放比例

# font-weight 字型粗細

- font-weight: normal | bold | bolder | lighter | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | inherit
  - 'normal' is synonymous with '400', and 'bold' is synonymous with '700'
  - The 'bolder' and 'lighter' values select font weights that are relative to the weight inherited from the parent
  - e.g. [text/font-weight.html](#)

```
<span style="font-weight: normal">normal</span>
<span style="font-weight: bolder">bolder</span>
<span style="font-weight: lighter">lighter</span>
<span style="font-weight: 100">100</span>
```

# font-style 字型格式

- font-style: normal | italic | oblique | inherit
  - italic (真)斜體字
    - Italic designs are not just the slanted version of the regular (roman) style
  - oblique (偽)斜體字:
    - a roman type that has been skewed a certain number of degrees (8-12 degrees)
    - it uses the same glyphs as roman type
    - usually change on the fly
  - e.g. [text/font-style.html](#)

```
<span style="font-style: normal">normal</span>
<span style="font-style: italic">italic</span>
<span style="font-style: oblique">oblique</span>
```

# font Shorthand 字型速寫法

- 使用 font 屬性來指定字型的全部屬性
- e.g. [text/font.html](#)

```
h1 {  
    font-family: Helvetica, sans-serif;  
    font-size: 12px;  
    font-weight: bold;  
    font-style: italic;  
}
```

may be rewritten with a single shorthand property

```
h1 { font: bold 12px italic Helvetica, sans-serif; }
```

# 擷取作業系統字型

- **caption** 用在有標題的控制項上(例如按鈕或是選單)
  - e.g. `button {font: caption; font-size: 1em;}`  
讓網頁上的按鈕看起來跟作業系統的按鈕一模一樣
- **icon** 用於文字標籤的小圖示
- **menu** 用於選單上
  - e.g. [text/font.html](#)
- **message-box** 用於對話視窗上
- **small-caption** 用於呈現小寫
- **status-bar** 用於視窗的狀態列上

# 行高— line-height 屬性

- 行高是從一行中最高的行內方框的頂端，到最低的行內方框的底端。
- line-height 屬性設定如下：

normal | <number> | <length> | <percentage> | inherit

- e.g. [text/line-height.html](#)

```
body {line-height: 14px; }
```

```
<p style="line-height: normal;"></p>
```

```
<p style="line-height: 2em;"></p>      2em=200%
```

```
<p style="line-height: 220%;"></p>
```

- 可在設定 font 時，同時設定 font-size 與 line-height
  - e.g. font: 12/14;

# 水平對齊— text-align 屬性

- 整個段落首行的縮排，若設定負數，則為凸排
- 語法(CSS2.1)：text-align: left|center|right|justify|inherit
  - e.g. `p {text-align : justify}` 分散對齊
- e.g. [text/text-align.html](#)

# foreground color

- 設定前景顏色 (定義文字的顏色)
- 語法 : color: <color> | inherit
- e.g. [text/font-color.html](#)  
body { color: green; }

# color 表示法

- 色彩名稱
  - CSS 3 定義了 16+1 種 Basic color keywords
    - aqua, black, blue, fuchsia, gray/grey, green, lime, maroon, navy, olive, purple, red, silver, teal, white, and yellow
    - <http://www.w3.org/TR/css3-color/#html4>
  - 及 130 Extended color keywords
    - <http://www.w3.org/TR/css3-color/#svg-color>

# color 表示法

## ■ RGB 色

- 16進位表示法：

- #RrGgBb:

- #RGB: 會自動複製成 #RRGGBB

## ■ `rgb(r, g, b)`函數


- 數值：e.g. `rgb(180,100,100)`

- 百分比：e.g. `rgb(80%,50%,50%)`

## ■ `rgba(r,g,b,alpha)` 函數

- `alpha`: 透明度, 0.0 (全透明) ~ 1.0 (不透明)

- e.g. `rgba(255,0,0,0.5)`

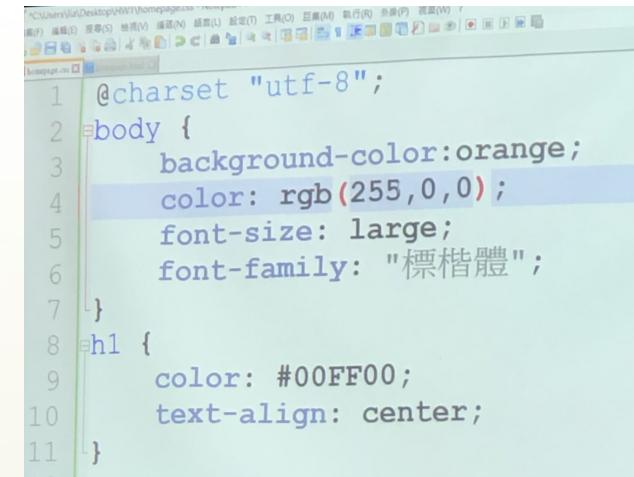

```
1 @charset "utf-8";
2 body {
3     background-color:orange;
4     color: rgb(255,0,0);
5     font-size: large;
6     font-family: "標楷體";
7 }
8 h1 {
9     color: #00FF00;
10    text-align: center;
11 }
```

設定文字 --  $q=0.2$

# color 表示法

- hsl(h, s, l)函數
  - h: Hue (色調/色相) 0~360
  - s: Saturation (飽和度/濃度) 0% ~ 100%
  - l: lightness (亮度) 0% ~ 100%
  - e.g. hsl(125, 38%, 82%)
  - <http://www.w3.org/TR/css3-color/#hsl-examples>
- hsla(h, s, l, alpha)

# opacity 透明度

- CSS3 新增 opacity 來指定透明度  
opacity: 0.0 (全透明) ~ 1.0 (不透明);
- e.g. [text/opacity.html](#)



- IE 8 以前則需使用  
filter: alpha(opacity=0~100);  
來定義。

# 文字陰影

- Syntax:  $\text{text-shadow: } h\text{-offset } v\text{-offset } blur\text{ color;}$
- e.g.  $x\text{軸 } y\text{軸平移 } \text{寬度}$   
p {text-shadow: 0.1em 2px 4px green;}
- e.g. [text/text-shadow.html](#)
  - text-shadow: 0.1em 2px 4px green;



網頁設計

- reference
- <http://www.w3.org/Style/Examples/007/text-shadow>

# Background-color 背景顏色

- background-color: <color> | transparent | inherit
- e.g. [background/background-color.html](#)

background-color: aqua;

background-color: #C0C0C0;

background-color: #FF0;

background-color: rgb(0,255,255);

background-color: rgb(75%,75%,75%);

background-color: rgba(255,0,0,50%);


# background-image 背景圖片

- background-image 背景圖片


- 語法：`<uri> | none | inherit`
  - e.g. [background/background-image.html](#)

```
body {background-image: url("bg.gif")}
```

- `url()` 內的位址，是與 CSS 檔案相對的路徑，如果開頭加上 / 則為整個網站的相對路徑。

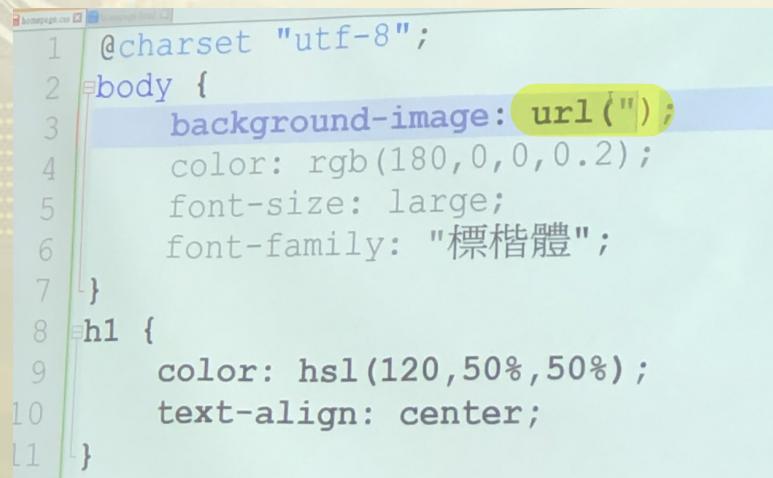

```
1 @charset "utf-8";
2 body {
3     background-image: url(");
4     color: rgb(180,0,0,0.2);
5     font-size: large;
6     font-family: "標楷體";
7 }
8 h1 {
9     color: hsl(120,50%,50%);
10    text-align: center;
11 }
```

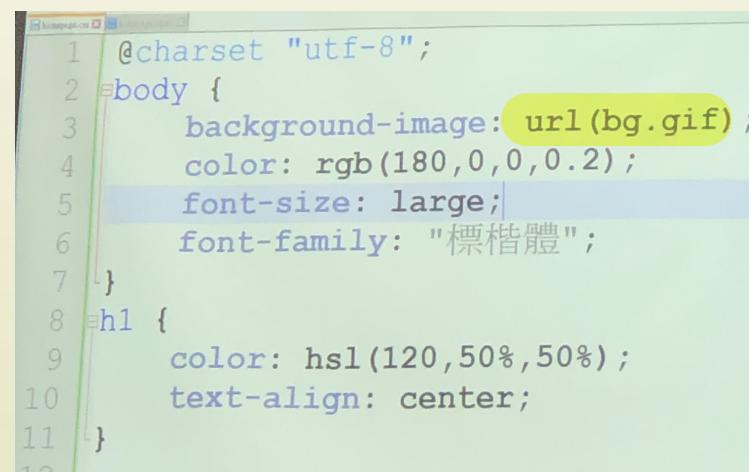

```
1 @charset "utf-8";
2 body {
3     background-image: url(bg.gif);
4     color: rgb(180,0,0,0.2);
5     font-size: large;
6     font-family: "標楷體";
7 }
8 h1 {
9     color: hsl(120,50%,50%);
10    text-align: center;
11 }
```

# background-repeat

- background-repeat **背景重覆方式**
  - 語法 : repeat | repeat-x | repeat-y | no-repeat | inherit;
- **background-position** **背景位置**
  - 語法 : [ left | center | right ] or  
[<length> | <percentage> | left | center | right ]  
[<length> | <percentage> | top | center | bottom ] | inherit
- **background-attachment** **背景是否會跟著捲動**
  - 語法 : scroll | fixed
  - e.g. [background/background-attachment.html](#)

# background-size

- Specify the size of a background image
- `background-size: contain | cover | <percentage> | <x, y>`
  - `contain`: 等比例縮小至可放入 content area
  - `cover`: 等比例放大至可填滿 content area
- e.g. `background-size: 100px 60px;`

# background-origin, background-clip

- background-origin: border-box | padding-box | content-box
  - 背景顯示的範圍
- background-clip: border-box | padding-box | content-box
  - 背景圖示的裁切
- e.g. [background/background-origin.html](#)

# background shorthand 背景速寫法

- `background: <background-color> <background-image> <background-repeat> <background-attachment> <background-position [&/background-size]> <background-clip> <background-origin>`
- e.g.

```
body {background: green url(bg.gif) repeat-y fixed top left;}
```

相當於

```
body {background-color: green;           >這樣會 image 優先  
background-image: url(bg.gif);  
background-repeat: repeat-y;  
background-attachment: fixed;  
background-position: top left;          定住位置  
}
```

# Gradients Background 漸層色

- (CSS3) background:
  - `linear-gradient(direction, color-stop1, color-stop2, ...);`
    - `repeating-linear-gradient( ... );`
  - `radial-gradient(shape size at position, start-color, ..., last-color);`
    - `repeating-radial-gradient( ... );`
  - `conic-gradient([from angle] [at position,] color [degree], color [degree], ...);`
- e.g.
  - `background-image: linear-gradient(left, red, blue);`
- [http://www.w3schools.com/css/css3\\_gradients.asp](http://www.w3schools.com/css/css3_gradients.asp)

# Selector Types

1. Type/Element/Tag Selector
2. Grouped Selector
3. Universal Selector
4. **Class Selector**
5. **ID Selector**
6. **Attribute Selector**
7. Descendant Selector
8. Child Selector
9. Adjacent Sibling Selector
10. General Sibling Selector

# T4: Class Selector 1/3

- The Class Selector be applied to the element that has an “class” attribute with a value of class-name
- Syntax: element.class-name {rule-declarations}
- e.g. [selector-class.html](#)

`p.right {text-align:right}`

`p.center {text-align:center}`

...

`<p class="right"> right-aligned paragraph</p>`

`<p class="center"> center-aligned paragraph</p>`

# T4: Class Selector 2/3

- omit the element name, applied to all elements

- `*.class-name` or `.class-name`

- e.g. `selector-class.html`

```
.center {text-align:center}
```

...

```
<h1 class="center">center-aligned</h1>
<p class="center">center-aligned too</p>
<div class="center">center text</div>
```

# T4: Class Selector 3/3 – Multiple Class


- To match a subset of "class" values
- e.g. [selector-class-multiple.html](#)
  - the following rule matches any P element whose "class" attribute has been assigned a list of space-separated values that includes "pastoral" and "marine":  
p.~~marine~~<sup>且</sup>~~pastoral~~ { color: green }  
<p class="pastoral blue aqua marine">
  - This rule matches when class="pastoral blue aqua marine" but does not match for <div class="pastoral blue" >

```
17 <a href="http://google.com/">網路資  
18 </nav>  
19 <main>  
20   <section>  
21       
22   </section>  
23   <section>  
24     <h1 class="c2">基本資料</h1>  
25     <article class="c2">  
26       姓名: 秦大偉  
27     </article>  
28     <article class="center">  
29       番號: 121010011  
30     </article>  
31   </section>  
32 <section>
```


會把姓多放中P09



```
17     <a href="http://google.com/">網路資
18   </nav>
19   <main>
20     <section>
21       
22     </section>
23     <section>
24       <h1 class="c2">基本資料</h1>
25       <article class="c2">
26         姓名: 秦大偉
27       </article>
28       <article class="center">
29         學號: 121010011
30       </article>
31     </section>
32   <section>
```

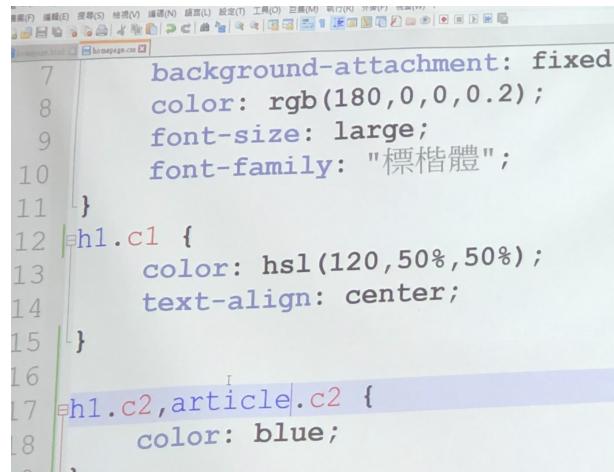

```
7 background-attachment: fixed;
8 color: rgb(180,0,0,0.2);
9 font-size: large;
10 font-family: "標楷體";
11 }
12 h1.c1 {
13   color: hsl(120,50%,50%);
14   text-align: center;
15 }
16
17 h1.c2, article.c2 {
18   color: blue;
19 }
```

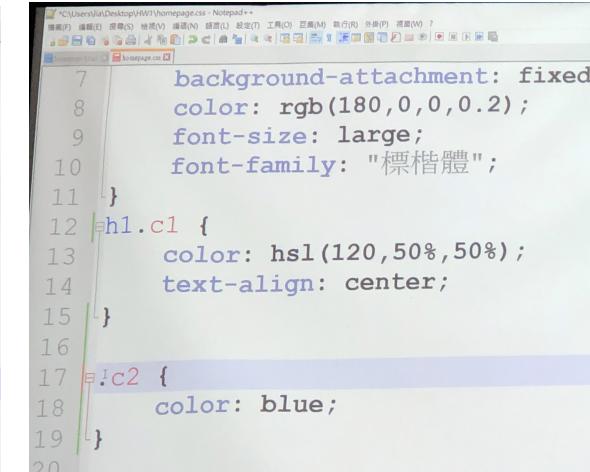

```
7 background-attachment: fixed;
8 color: rgb(180,0,0,0.2);
9 font-size: large;
10 font-family: "標楷體";
11 }
12 h1.c1 {
13   color: hsl(120,50%,50%);
14   text-align: center;
15 }
16
17 h1.c2, article.c2 {
18   color: blue;
19 }
```

# T5: ID Selector ★ ID 不可重複


- The ID Selector will be applied to the element that has an “id” attribute with a value of id
- Syntax: element#identifier {rule-declarations}
- e.g. selector-id.html

#green {color:green} .處以#取1t\

...

<span id="green">green text</span>

```
14 text-decoration:none;
15 }
16 a:focus {color: #CCC; font-size: 48px; text-decoration:none;}
17
18 //li:first-child {color: blue;}
19
21 li:nth-child(3n+1){color: green;}
22 //li:nth-of-type(3n+1){color: green;}
23 //li:last-child {color: red;}
24 //li:nth-last-child(3){color: green;}
25
26 /*a.newspaper:link { color: #990000; }
27 a.newspaper:visited { color: #006600; }
28 a.newspaper:hover { color: #666; }
```



第1,3,7項變顏色

連結到搜尋網站：

- 第一個清單iGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sdfgdfsgYahoo!奇摩
- sdfgsdfgfbing

第91回節點

//這少點點看不懂也不顯示

連結到搜尋網站：

```
9
10 <ul>
11 <li>第一個清單<a href="http://www.google.com">iGoogle</a></li>
12 <li>sgdfgsd<a href="http://www.google.com">iGoogle</a></li>
13 <li>sgdfgsd<a href="http://www.google.com">iGoogle</a></li>
14 <li>sgdfgsd<a href="http://www.google.com">iGoogle</a></li>
15 <ol></ol>
16 <li>sgdfgsd<a href="http://www.google.com">iGoogle</a></li>
17 <li>sgdfgsd<a href="http://www.google.com">iGoogle</a></li>
18 <li>sdfadfsa<a href="http://tw.yahoo.com">iYahoo</a></li>
```

# Class Selector versus ID Selector

- No two element can have the same id.
  - In reality, browser 通常不會檢查 ☹
  - 使用多次 id 可能會造成一些困擾，不建議如此用。例如 `getElememtByID()` 函數就必須依賴 unique ID
- id 不像 class 屬性可以設 multiple class
  - e.g. 不會有 `<div id="pastoral blue aqua marine">`

# T6: Attribute Selector

1/2

- Syntax 1: elem[attr] {...}
  - matches all elem elements that specify the attr attribute
- Syntax 2: elem[attr *op* "value"] {...}
  - e.g. input[type="text"] {font-family: sans-serif;}
  - where *op* could be =, ^=, \$=, \*=, ~=, |=,
    - = : 完全相同
    - ^= : begin with "value"
    - \$= : end with "value"
    - \*= : include substring "value"
    - ~= : include item "value"
    - |= : value either is exactly "value" or beginning with "value" immediately followed by "-"

```
1 @charset "utf-8";
2 body {
3     background-image: url(car.jpg);
4     background-repeat: no-repeat;
5     background-size: 200px;
6     background-position: right bottom;
7     background-attachment: fixed;
8     color: rgb(180,0,0,0.2);
9     font-size: large;
10    font-family: "標楷體";
11 }
12 a[href] {
13     font-family: "新細明體";
14 }
```

attribute object selector  
★ id/class selector

```
10     font-family: "標楷體";  
11 }  
12 a[href^="http"] {  
13     font-family: "新細明體";  
14     color: purple;  
15 }
```

# 此地資源變又無

```
9 <body>
10   <header>
11     <h1 id="d1" class="center" style="">美人的首
12     </h1>
13   </header>
14   <nav>          只有有href的才是可以點的
15     <a href="">關於我</a> 7
16     <a>作業一</a>
17     <a>作業二</a>
18     <a href="http://google.com/">網路資源</a>
19   </nav>
20   <main>
21     <section>
22       
23     </section>
24     <section>
```



```
13 //img[title="first image"] {border: 10px dotted red;}
14 img[title~="fish"] {border: 6px dashed blue;}
15
16 span.aa {color:red;}
17 span[class~="aa"] {color:green;}
18
19 a[href $= '.pdf'] {
20     padding-right: 24px;
21     background: url(image/pdf.ico) no-repeat right center;
22 }
23 a[href $= '.docx'] {
24     padding-right: 24px;
25     background: url(image/word.png) no-repeat right
26         center;
```

只要最末尾.pdf之後都會有一圖

# T6: Attribute Selector 2/2

- e.g. [selector-attribute.html](#)
  - attach a pdf icon to the right of any hyperlink who's URL ended in '.pdf'
  - `a[href $='.pdf'] { padding-right: 24px; background: url(icon_pdf.gif) no-repeat center right; }`
- Multiple attribute selectors can be used to refer to several attributes of an element
  - e.g. `elem[attr1][attr2] {...}`

# Selector Types

1. Type/Element/Tag Selector
2. Grouped Selector
3. Universal Selector
4. Class Selector
5. ID Selector
6. Attribute Selector

Combinators (Contextual Selector) 調用子節點

7. Descendant Selector
8. Child Selector
9. Adjacent Sibling Selector
10. General Sibling Selector

# T7: Descendant Selector

- A descendant selector is made up of two or more selectors separated by white space. A descendant selector of the form "A B" matches when an element B is an arbitrary descendant of some ancestor element A. B是任意的
- e.g. selector-descendant.html  
this example will match the <em> in the following content, “very” will be blue:

```
h1 em { color: blue }
```

global selector 作用于所有元素

...

```
<h1>This headline is <em>very</em>important</h1>
```

```
6 <style type="text/css">
7   h1 em { color: purple }
8   li em {color: red;}
9   li a em {color: silver;}
10  em {color: blue;}
11  h2 em {color: olive;}
12  em.h1 { ... }
13 </style>
14 </head>
15 <body>
16 <h1>This <em>headline</em> is <span><em>very</em></span>
17 important</h1>
18 <ul>
19   <li>item 1-1</li>
20   <li>item 1-2
21     <ol>nested list
22       <li>item 1-1</li>
23       <li>item 1-2
24     </ol>
25   </li>
26 </ul>
27 網頁技術
28 <ul>
29   <li>XHTML</li>
30   <li><em>JavaScript</em></li>
31   <li><a href="http://www.w3.org/Style/CSS/"><em>CSS</em></a></li>
32 </ul>
```

→ purple

```
17 <ul>
18   <li>item 1-1</li>
19   <li>item 1-2
20     <ol>nested list
21       <li>item 2</li>
22     </ol>
23   </li>
24 </ul>
25 <li>outside of UL</li>
26
27 網頁技術
28 <ul>
29   <li>XHTML</li>
30   <li><em>JavaScript</em></li>
31   <li><a href="http://www.w3.org/Style/CSS/"><em>CSS</em></a></li>
32 </ul>
```

→ red

# T7: Descendant Selector Example

- e.g.

```
ul li { color: blue; }
```

```
<ul>
```

```
  <li>item 1-1</li>
```

```
  <li>item 1-2
```

```
  <ol>
```

```
    <li>item 2</li>
```

```
  </ol>
```

```
  </li>
```

```
</ul>
```

- item 1-1, item 1-2, item 2 的顏色都是blue, 因為它們都在 ul 之下。

# T8: Child Selector

- A child selector matches when an element is the child of some element
- e.g. [selector-child.html](#) 若前例改為
  - `ul > li { color: blue; }` *li 必是 ul 兒子(孫子就不行)*
    - 則只有 item 1-1, item 1-2 的顏色會被改成 blue。item 2 是在第二層，所以沒被選擇到。
- PS: IE 系列，IE 7 才開始支援。

# T9: Adjacent Sibling Selector

- Syntax: E1 + E2
  - where E2 is the subject of the selector.
- The selector matches if E1 and E2 share the same parent in the document tree and E1 immediately precedes E2
- e.g. [selector-sibling-adjacent.html](#)  
only paragraph 1 is red.

`h1 + p { color: red; } 只有 h1 木目, p 的顏色 = red`

`<h1>subject</h1>`

`<p>Paragraph 1</p>`

`<p>Paragraph 2</p>`

# T10: General Sibling Selector

- new selector defined in **CSS 3**
- e.g. [selector-sibling-general.html](#)

上個例子中若改用 General Sibling Selector

```
h1 ~ p { color: red; }
```

```
<h1>subject</h1>
```

```
<p>Paragraph 1</p>
```

```
<p>Paragraph 2</p>
```

則 Paragraph 1 及 Paragraph 2 都會是紅色

```
14     text-decoration:none;
15   }
16 a:focus {color: #CCC; font-size: 48px; text-decoration:none;}
17
18 //li:first-child {color: blue;}
19
20 li:nth-child(3n+1){color: green;}
21 //li:nth-of-type(3n+1){color: green;}
22 //li:last-child {color: red;}
23 //li:nth-last-child(3){color: green;}
24
25 /*a.newspaper:link { color: #990000; }
26
```

第1,3,9要綠色

//這少點哭看不懂也不顯示

連結到搜尋網站：

- 第一個清單iGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle
- sgdfgsdiGoogle 1且6th統計
- sdfgdfsgYahoo!奇摩
- sdfgsdfgfdbing

```
14     <li>sgdfgsdiGoogle</li>
15   </ol></ol>
16   <li>sgdfgsd<a href="http://www.google.com.tw">iGoogle</a></li>
```

因7才會第11回節點

# Pseudo-Classes, Pseudo-Elements

- Style is normally attached to an element in the document tree. It is insufficient for some scenarios.
- CSS 2.1 introduces the concepts of **pseudo-classes** and **pseudo-elements** to permit formatting based on information that lies outside the document tree.

# Pseudo-Classes, Pseudo-Elements

- Pseudo-Classes **人工做不到出來** classify elements on characteristics other than their name, attributes or content.
  - Structural pseudo-classes **人工做不到出來**  
:firstchild :lastchild :nth-child() **:(nth-last-child() ... -1回)**
  - link pseudo classes :link :visited
  - dynamic pseudo classes :hover :active :focus
  - language psedu class :lang **滑鼠移過時會使其變色**
- Pseudo-Elements **人工做不到出來**
  - ::first-line ::first-letter ::before **:(::after 二回)**
    - ( CSS 2.1 用 : CSS3 改用 :: ) **第一行是重點的,**
  - http://www.w3.org/TR/selectors/

# Pseudo Classes :first-child

- :first-child pseudo-classes
  - matches an element that is the first child element
- link pseudo-classes :link, :visited
  - applies for links that have not yet or have been visited
  - The two states are mutually exclusive.
- e.g. [selector-pseudoClass.html](#)
- <http://www.w3.org/TR/css3-selectors/>

# Pseudo Classes :hover :active

- dynamic pseudo-classes

- :hover *hover: 滑鼠移過時會改樣式*

- while the user designates an element (with some pointing device), but does not activate it. For example, the cursor (mouse pointer) hovers over a box generated by the element

- :active

- applies while an element is being activated by the user. For example, between the times the user presses the mouse button and releases it.

- :focus

- applies while an element has the focus (accepts keyboard events or other forms of text input).

- An element may match several pseudo-classes at the same time.

# Pseudo Classes :hover :active

- [Note] you must specify the links pseudo-classes in a particular order :link, :visited, :hover, and :active. 
  - the a:hover must be placed after the a:link and a:visited rules, since otherwise the cascading rules will hide the 'color' property of the a:hover rule.
  - Similarly, because a:active is placed after a:hover, the active color will apply when the user both activates and hovers over the <a> element
  - combining dynamic pseudo-classes
    - e.g. a:focus:hover { background: white ;}

## 偽類 pseudo-class

偽類能夠在特定行為時改變 DOM 的 CSS 樣式，是基於當前元素處於的狀態，或者說元素當前所具有的特性，（而不是元素的id、class、屬性等靜態的標誌）由於**狀態是動態變化的**，所以一個元素達到一個特定狀態時，它可能得到一個偽類的樣式；當狀態改變時，它又會失去這個樣式，由此可以看出，它的功能和class有些類似。

上面的中文真的是有看沒有懂，用更白話的方式描述：

偽類就是選擇已經存在的東西，讓這個東西改變它的狀態或是產生動態變化，而狀態能夠因為偽類的設定有開始與結束。

例如：設定滑鼠滑過的樣式(:hover)、被訪問過的連結的樣式(:visited)。

## 偽元素pseudo-element

偽元素本質上是一個元素，只是它一般需要依附在一個已有元素上，作為這個元素的“部分”或“補充”，它基於原有的 DOM，創建另一個可設定不同 CSS 的 DOM 屬性，實際上，設計偽元素的目的就是去選取諸如元素內容第一個字（母）、第一行，選取某些內容前面或後面這種普通的選擇器無法完成的工作。

再來一段翻譯蒟蒻：

偽元素 (*pseudo element*) 就是在**創造一個新的假元素**，因為它不在 DOM 裡面，而是創造了一個我們看不見的元素。

```
7     background-attachment: fixed;
8     color: rgb(180,0,0,0.2);
9     font-size: large;
10    font-family: "標楷體";
11  }
12  a:link {
13    text-decoration: none;
14    color: red;
15  }
16  a:visited {
17    color: green;
18 }
```

網址/按鈕樣式

```
5     background-size: 100% 100% no-repeat;
6     background-position: right bottom;
7     background-attachment: fixed;
8     color: rgb(180,0,0,0.2);
9     font-size: large;
10    font-family: "標楷體";
11  }
12  a:link,a:visited {
13    text-decoration: none;
14    color: red;
15  }
16
17
```

拜訪後的顏色也是紅的

```
10   font-family: "標楷體";
11 }
12 a:link,a:visited {
13   text-decoration: none;
14   color: red;
15 }
16 a:hover {
17   background-color: blue;
18   color: white;
19 }
20 a:active {
21   line-height: 2em;
22 }
```

# Pseudo Classes :target

- :target **突出link點選的標籤**  
style the current active target element(目的元素), for URLs with bookmark
- e.g. selector-pseudoClass-target.html

# Pseudo Classes :lang

- language pseudo-class :lang

- If the HTML document specifies the language attribute (e.g. `<meta http-equiv="Content-Language" content="zh">`) It is possible to write selectors in CSS that match an element based on its language
- e.g. [selector-pseudoClass-lang.html](#)

```
:lang(fr) { color: green; }
```

我是法國人<q lang="fr">Je suis Français.</q>

```
1 <!DOCTYPE html>
2 <html lang="zh-hant">
3 <!--
4 zh-hant: 正體中文
5 zh-hans: 簡體中文
6 -->
7 <head>
8 <meta http-equiv="Content-Type" content="text/html;
charset=utf-8" />
9 <!--meta http-equiv="Content-Language" content="zh-hant
-->
10 <title>:lang Pseudo Class</title>
11 <style type="text/css">
12 :lang(zh-hant) {
13   color: red;
14   quotes: '\3010' '\3011'; /* 【】 */
15 }
16 :lang(en) {
17   color: blue;
18   quotes: "“”";
19 }
20 :lang(fr) {
21   color: green;
22   quotes: '‘’' '‘’' '‘’';
23 }
24 </style>
25 </head>
26 <body>
27 <q>今日事，<q>今日畢</q></q><br>
28 <q lang="en">Never put off till tomorrow what you can do
today.</q><br>
29 <q lang="en">Time is tide.</q><br>
30 <q lang="fr">Il ne faut jamais remettre à demain ce qu'on
peut faire le jour même.</q><br>
31 <br>
32 <q>你好，<q>早安</q></q><br>
33 <q lang="en">Hello, <q>Good Morning.</q>!</q><br>
34 <q lang="fr">Salut <q>Bonjour</q></q><br>
35 </body>
36 </html>
```

```
26 <body>
27 <q>今日事，<q>今日畢</q></q><br>
28 <q lang="en">Never put off till tomorrow what you can do
today.</q><br>
29 <q lang="en">Time is tide.</q><br>
30 <q lang="fr">Il ne faut jamais remettre à demain ce qu'on
peut faire le jour même.</q><br>
31 <br>
32 <q>你好，<q>早安</q></q><br>
33 <q lang="en">Hello, <q>Good Morning.</q>!</q><br>
34 <q lang="fr">Salut <q>Bonjour</q></q><br>
35 </body>
36 </html>
```

```
14   quotes: '\3010' '\3011'; /* 【】 */
15 }
16 :lang(en) {
17   color: blue;
18   quotes: "“”";
19 }
20 :lang(fr) {
21   color: green;
22   quotes: '‘’' '‘’' '‘’';
23 }
24 </style>
25 </head>
26 <body>
27 <q>今日事，<q>今日畢</q></q><br>
28 <q lang="en">Never put off till tomorrow what you can do
today.</q><br>
```

【今日事・【今日畢】】  
"Never put off till tomorrow what you can do today."  
"Time is tide."  
<Il ne faut jamais remettre à demain ce qu'on peut faire le jour même.>

【你好，【早安】】  
"Hello, 'Good Morning.'!"  
<Salut «Bonjour»>

跟據語言換色

如果用樣式表若拿改仍可用

# Pseudo Elements ::first-line

- ::first-line
  - applies special styles to the contents of the first formatted line of a paragraph.
  - e.g. `p::first-line { text-transform: uppercase; }`
    - the rule means "change the letters of the first line of every paragraph to uppercase"
  - e.g. [selector-pseudoElement.html](#)
- ::first-letter
  - select the first letter of the first line of a block

# Pseudo Elements ::before ::after

- ::before, ::after

- insert generated content before or after an element's content

- e.g.

- ```
p::before {content: "開始噜";} 
```

- ```
p::after {content: url(smile.gif);} /* 後面插入圖片 */ 
```

- ```
a[href$=".pdf"]::after {content: url("pdf.ico");} 
```

- e.g. 

```
div::after { content: 'the end'; } 
```

- e.g. 在 a 元素後面顯示網址

- ```
a[href]::after {content: " (" attr(href) ")";} 
```

- selector 中只能存在一個 pseudo element，且必須是最後一個元素

```
15 }
16 a[href]::after {
17   content: "(" attr(href) ")";
18 }
```

有網址的頁示其 URL

```
19 a[href$=".pdf"]::after {
20   content: url("image/pdf.ico");
21   /*display: inline-block;
22   width: 5px; 不能改 image width? */
23 }
```

.pdf 當後加圖示

# Cascading Order

- What style will be used when there is more than one style specified for an HTML element?
- priority: **inline > embedded > linked > browser default**
  - which means that inline style will override a style defined inside the `<style>` tag, or in an external style sheet
  - 註: browser 大都實作為依 code 的位置，後覆蓋前
- e.g.
  - [selector/cascading.html](#)

# ✿ Specificity of Selector 1/2

- 明確性: 多個 selector 作用於同一元素時，Specificity 值愈大表示愈明確，愈優先應用
- Specificity 值由 (d, c, b, a) 四值組成，計算方式:
  - a: number of element/pseudo-element
  - b: number of attribute/class/pseudo-class
  - c: number of ID attribute
  - d: declared by "style=", 1 or 0
- e.g.
  - type selector
    - p {color: blue;} /\* (0, 0, 0, 1) \*/
    - p em {color: red;} /\* (0, 0, 0, 2) \*/
    - p::first-line {color: red;} /\* (0, 0, 0, 2) \*/

*pseudo element*

# ✿ Specificity of Selector 2/2

!important: 特權蓋所有樣式

- class/attribute selector
  - .note {...} /\* (0, 0, 1, 0) \*/
  - p.note {color: orange;} /\* (0, 0, 1, 1) \*/
- Id selector
  - #aside {color: lightgreen;} /\* (0, 1, 0, 0) \*/
  - div#aside p {color: gray;} /\* (0, 1, 0, 2) \*/ *2個 element*
- inline style
  - style="color:green;" /\* (1, 0, 0, 0) \*/
- 全域 selector *什麼都無是取小*
  - \* {color: black;} /\* (0, 0, 0, 0) \*/
- Quiz:
  - elem. qrt.*      *ele ele ele 1class*
  - ul ol+li {}, h1 + \*[rel=up] {}, ul ol li.red {}, li.red.level {}
- e.g. selector/specification.html      *0,0,1,3*      *0,0,2,1 (2class)*


# CSS Box Model

CSS 的方框概念

# Box Model

- CSS Box Model concept:  
"Each HTML element is in a box or is a box"
- Each box has a *content area* (e.g., text, an image, etc.) and optional surrounding *padding*, *border*, and *margin* areas;



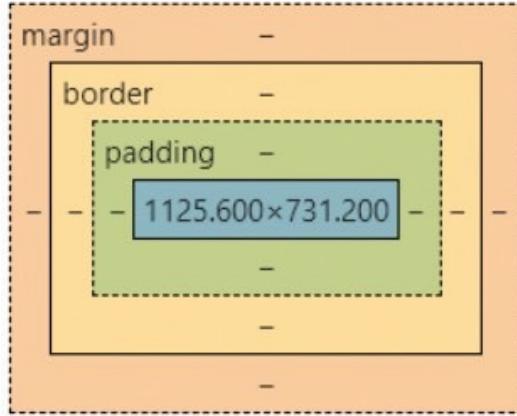

## 盒模型

盒模型能幫助我們更加了解如何操控網頁並進行排版。

每個標籤都有獨立的盒模型，看盒模型我們可以觀察到有三個英文單字，四個顏色

- 紅色：`margin`，外邊距，可以想成與下一個標籤的距離
- 橘色：`border`，邊框，就是內容的外框
- 綠色：`padding`，內邊距，可以想成內容與外框的留白距離
- 藍色：內容

### 盒模型通用語法

可以看到盒模型在 `margin`、`border`、`padding`，都可以在四個方位設定距離

而設定的語法也很簡單直白，在此用 `margin` 做示範：

- `margin-top: 上距`，上外邊距
- `margin-right: 右距`，右外邊距
- `margin-bottom: 下距`，下外邊距
- `margin-left: 左距`，左外邊距

### 一行程式碼簡化的語法

- `margin: 上距 右距 下距 左距`，四個值的順序不能錯，分別設定上、右、下、左
- `margin: 上距 水平距 下距`，三個值的順序不能錯，分別設定上、左右、下
- `margin: 垂直距 水平距`，兩個值的順序不能錯，分別設定上下與左右
- `margin: 距離`，一個值你也很難錯，四個方向一起設定

以上 `margin` 也可以替換成 `border` 來設定 `border` 或 `padding` 來設定 `padding`

# Inline Box versus Block Box


- inline box
  - generated by inline-level elements, e.g. <span>, <b>, <em>, ...
- block box
  - generated by block-level elements, e.g. <div>, <p>, ...
- When an inline box contains a block box, the inline box are broken around the block. The line boxes before the break and after the break are enclosed in anonymous block boxes, and the block box becomes a sibling of those anonymous block boxes.
  - e.g. [box/box-inline-block.html](#)  
*text before the P. <p> content of P.</p> text after the P.*
- Reference [左 to inline box, φ block box](#)
  - <http://www.w3.org/TR/CSS21/visuren.html#visual-model-intro>

# 邊界的設定 – margin 屬性

- margin 設定元素邊界與其他元素的間距
  - margin-top 設定元素的上間距
  - margin-right 設定元素的右間距
  - margin-bottom 設定元素的下間距
  - margin-left 設定元素的左間距
  - 四邊界的設定語法均相同  
`<length>|<percentage>|auto`
- 直接使用 margin  
一次設定四邊間距，依序為  
上、右、下、左間距
- e.g. [box/box-margin.html](#)

```
26 margin-bottom: 40px;  
27 /*  
28 //width: 200px;  
29 text-align: center;  
30 margin: 40px auto 30px 1cm;  
31 margin: 30px 20px 10px;  
32 margin: 20px 10px;  
33 margin: 1em;  
34 margin-top: 40px;  
35 margin-right: auto;  
36 margin-left: 1cm;  
37 margin-bottom: 130px;  
38 */  
39 }  
40 div#inner2 {  
41 margin-top: -40px;
```

設定的順序：上右下左

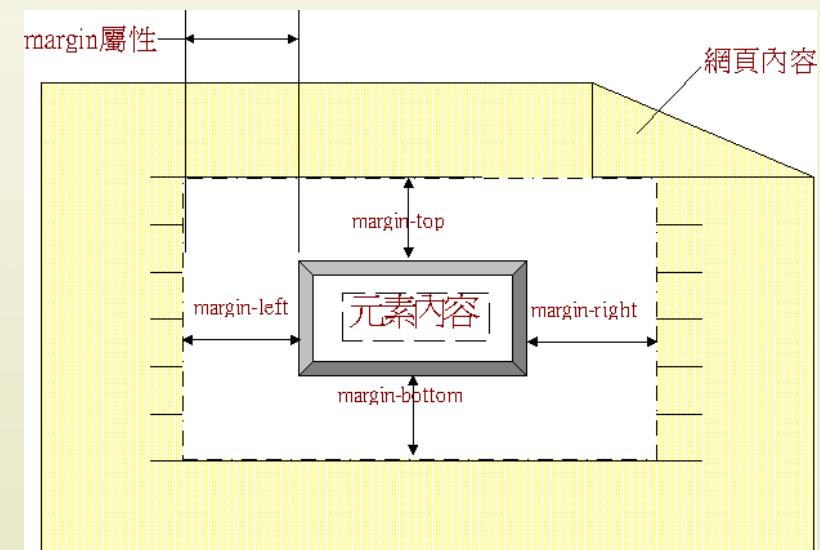

# 邊界設定 – margin collapsing

- Two or more adjoining vertical margins of block boxes collapse in the normal flow.
- so that the bottom margin of one element overlaps with the top margin of the element below it.
- The resulting margin width is the maximum of the adjoining margin widths.
- e.g. [box/box-margin-collapse.html](#)
- margins of inline-block elements do not collapse.
- <http://www.w3.org/TR/CSS21/box.html#margin-properties>

上下界相鄰 box 之 margin 值不同：

2 正：取大；1 正1負：2 值相加

# 邊界設定 – center alignment

- 如果您要讓元素置中顯示，您可以將 `margin-left` 與 `margin-right` 的值都設定為 `auto`，瀏覽器會自動幫您調整位置。

- e.g. `box/box-margin-auto.html`

```
h1 {  
    margin-left: auto;  
    margin-right: auto;  
    width: 140px;  
}
```


```
body {  
    width: 80%;  
    margin: auto;  
}
```

# 邊界的設定 – padding 屬性

- padding 設定元素的上，右，下，左內距
- padding-top 設定元素的上內距
- padding-right 設定元素的右內距
- padding-bottom 設定元素的下內距
- padding-left 設定元素的左內距
- e.g. box/box-padding.html

```
11 } background-color: #622096;
12 background-position: right bottom;
13 background-attachment: fixed;
14 color: rgb(180,0,0,0.2);
15 font-family: "標楷體";
16 }
17 header {
18   font-size: 2em;
19   background-color: #622096;
20   line-height: 3em;
21   text-align: center;
22 }
23 header h1 {
24   padding: 0.5em 0;
25   letter-spacing: 0.2em;
26   color: #F5FF82;
27 }
```

設中文字間距 → 英: word-spacing

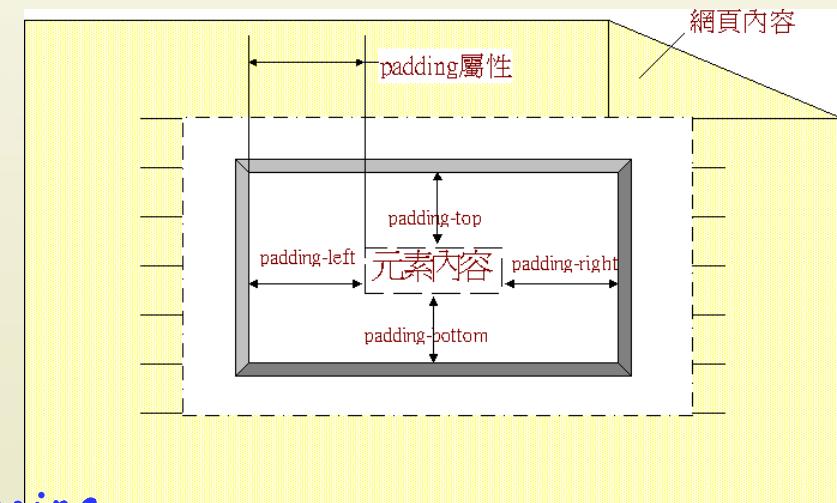

# 框線的寬— border-width 屬性

- border-width 設定元素的上，右，下，左邊框厚度
  - border-width屬性可以設定的值如下：  
`border-width: thin | medium | thick | <length>`
- border-width 屬性，共有四種設定方法：
  - 設定一個值：四框線厚度均使用同一個設定值。
  - 設定二個值：上與下框線厚度套用第一個值，右與左框線厚度套用第二個值。
  - 設定三個值：上框線厚度套用第一個值，右與左框線厚度套用第二個值，下框線厚度套用第三個值。
  - 設定四個值：四框線厚度的套用順序，依序為上、右、下、左。

# 框線的寬— border-width 屬性

- 若您想設定元素中某一邊的框線厚度時，可利用下列四種框線屬性來設定：
  - border-top-width 設定元素的的上邊框厚度
  - border-right-width 設定元素的的右邊框厚度
  - border-bottom-width 設定元素的的下邊框厚度
  - border-left-width 設定元素的的左邊框厚度
- e.g. `div { border-top-width: thin; border-right-width: medium; border-bottom-width: thick; border-left-width: 12px; }`

# 框線的顏色— border-color 屬性

- border-color 屬性用於控制元素框線的顏色，在設定時跟 border-width 屬性一樣，有四種設定方法：
  - 設定一個值：四框線顏色均使用同一個設定值。
  - 設定二個值：上與下框線顏色套用第一個值，右與左框線套用第二個值。
  - 設定三個值：上框線顏色套用第一個值，右與左框線顏色套用第二個值，下框線顏色套用第三個值。
  - 設定四個值：四框線顏色的套用順序，依序為上、右、下、左。

# 框線的顏色— border-color 屬性

- 若您想設定某一邊的框線顏色時，可利用下列四種屬性來設定：
  - border-top-color 設定元素的的上邊框顏色
  - border-right-color 設定元素的的右邊框顏色
  - border-bottom-color 設定元素的的下邊框顏色
  - border-left-color 設定元素的的左邊框顏色
- e.g. div {  
border-top-color: red; border-right-color: #00FF00;  
border-bottom-color: #00F; border-left-color:  
rgb(128,0,128);  
}

# 框線的樣式— border-style 屬性

- border-style框線樣式屬性主要是設定元素框線的樣式語法設定值如下：

border-style: none | dotted(小點虛線) | dashed(大點虛線) | solid(實線) | double(雙直線) | groove(3D凹線) | ridge(3D凸線) | inset(3D框入線) | outset(3D隆起線)



# 框線的樣式— border-style 屬性

- 若您僅想設定某一邊的框線樣式時，可利用下列四種框線屬性來設定：
  - border-top-style 設定元素的的上邊框格式
  - border-right-style 設定元素的的右邊框格式
  - border-bottom-style 設定元素的的下邊框格式
  - border-left-style 設定元素的的左邊框格式
- e.g. `div {`  
`border-top-style: solid;`  
`border-right-style: dashed;`  
`border-bottom-style: dotted;`  
`border-left-style: double;`  
`}`

# 快速設定 – border 屬性

- 語法如下：

`border: <border-width> || <border-style> || <color>`

- 屬性清單

- `border` 設定上,右,下,左邊框的格式，厚度，與顏色
- `border-top` 設定上邊框的格式，厚度，與顏色
- `border-right` 設定右邊框的格式，厚度，與顏色
- `border-bottom` 設定下邊框的格式，厚度，與顏色
- `border-left` 設定左邊框的格式，厚度，與顏色

# 快速設定 – border 屬性


- e.g. 

```
div {  
    border-top: solid thin red;  
    border-right: medium dashed #00FF00;  
    border-bottom: rgb(128,0,128) dotted;  
    border-left: double;  
}
```
- If the border is set to 0 it effectively disappears and the border edge is the same as the padding edge.

# Rounded Corner 圓角的方框

- 瀏覽器顯示方框的方式，預設上是使用直角
- CSS3 標準下，設定 border-radius 屬性
  - e.g. border-radius: 32px;
- 語法 border-radius: 左上 右上 右下 左下 / 左上 右上 右下 左下 (前半水平半徑, 後半垂直半徑)
- 如果不支援 CSS3
  - Gecko 系列的瀏覽器 (e.g. Firefox, Flock)  
自定的屬性 -moz-border-radius: 32px;
  - WebKit 系列 (e.g. Chrome, Safari)  
-webkit-border-radius: 32px;
  - 為了相容性，可三個同時設
- e.g. [box/box-border-radius.html](#)

```
20     text-align: center;
21 }
22 header h1 {
23     padding: 0.5em 0;
24     letter-spacing: 0.2em;
25     color: #F5FF82;
26 }
27 section,footer {
28     border: red 3px dashed;
29 }
30 a {
31     border: 2px solid blue;
32     border-radius: 5px;
33     padding: 3px;
34     margin: 10px 0; 調整margin:左右各10px
35 }
```

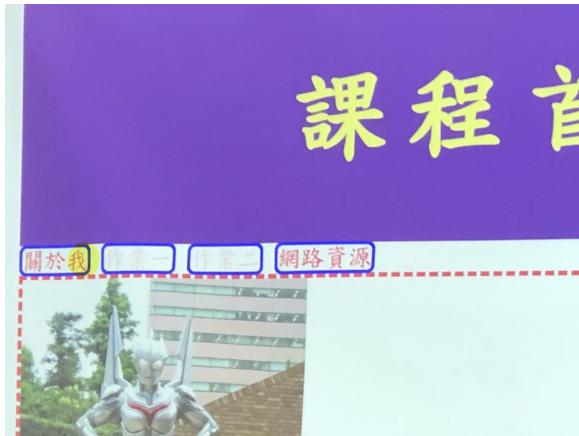

```
22 header h1 {
23     padding: 0.5em 0;
24     letter-spacing: 0.2em;
25     color: #F5FF82;
26 }
27 section,footer {
28     border: red 3px dashed;
29 }
30 nav { 將上層的外邊距增加上下各10px
31     padding: 10px; 調整上層的外邊距增加上下各10px
32 }
33 a {
34     border: 2px solid blue;
35     border-radius: 5px;
36     padding: 3px;
```





# 綜合練習 - Button Style

- e.g.

```
.btn {  
    padding: 0 0.5em;  
    font: bold 10px verdana, sans-serif;  
    color: #FFF; background: #F60;  
    text-decoration: none;  
    border: 1px solid;  
    border-color: #FC9 #630 #330 #F96;  
    border-radius: 16px;  
    font-size: 2em;  
}  
<a href="" class="btn">Button</a>
```



# border-image

- 使用圖片作為 border
  - border-image-source  
path to the image to be used as a border
  - border-image-slice inward offsets of the image-border
  - border-image-width The widths of the image-border
  - border-image-outset  
The amount by which the border image area extends beyond the border box
  - border-image-repeat  
Whether the image-border should be repeated, rounded or stretched
- For border-image to work, the element also needs the border property set!



# border-image

- shorthand property

border-image: *source slice width outset repeat*;

- e.g. [box/box-border-image.html](#)

```
37 }  
38 a:link,a:visited {  
39   text-decoration: none;  
40   color: red;  
41 }  
42 a:hover {  
43   background-color: blue;  
44   color: white;  
45   border-width: 30px;  
46 }  
47 a:active {  
48 }
```

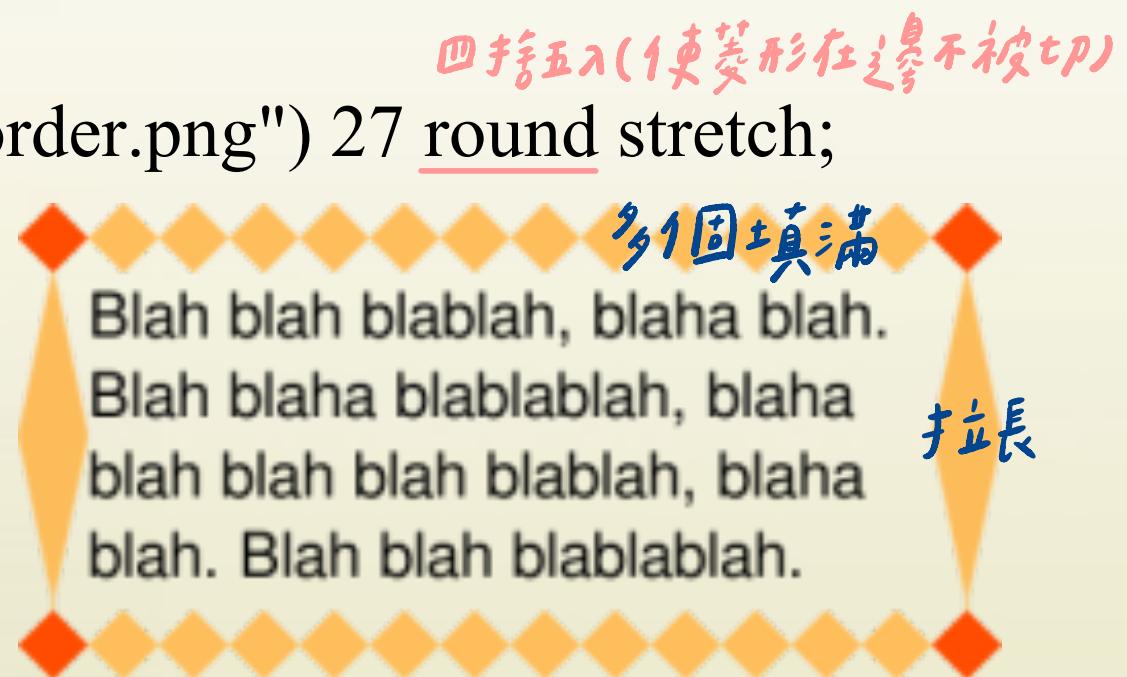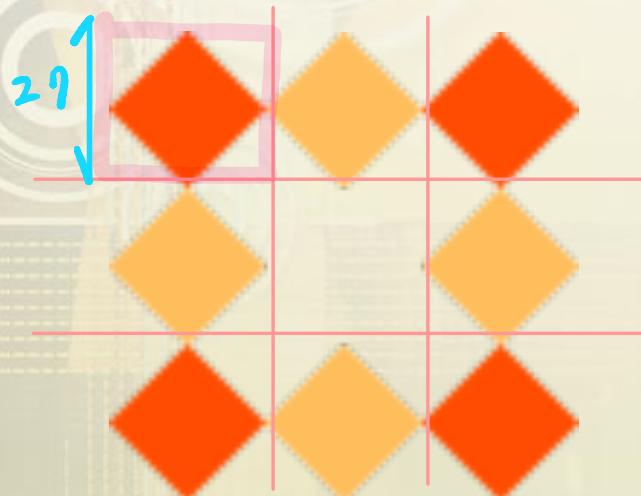

- <http://www.w3.org/TR/css3-background/#border-images>

# outline 1/2

- 設定與 border 類似，但是四邊都一樣，無法個別設定
- outline: [ <outline-color> || <outline-style> || <outline-width> ]| inherit
  - outline-width
  - outline-style:
    - 不能使用 hidden
    - outline-color: <color> | invert | inherit
- outline 總是在 box 上面，不影響 box 的大小與位置，不影響版面編排 *旁邊的不會被重疊 (不改排版)*
- outline 不一定是個矩形
- <http://www.w3.org/TR/CSS21/ui.html#propdef-outline>

# outline 2/2

- e.g. [box/box-outline.html](#)
- outline 常與 :focus, :active 同時使用，提醒使用者已選用某項物件
  - `button:focus {outline: thick solid black }`  
`button:active {outline: thick solid red }`
- outline-offset:
  - 與 outline 搭配，設定 outline 與 border 的間距

# 設定 box 寬度與高度

與 Box 相關的其他屬性

- height 設定元素的高度
- width 設定元素的寬度
- e.g. 指定div元素的寬度與高度：

```
div#div1 {width: 120px; height: 120px;}
```

```
div#div2 {width: 160px; height: 60px;}
```


```
div#div3 {width: 60%; height: 15%;}
```

# CSS Compatibility

- The main problem with using CSS has been inconsistent browser support. Browsers can interpret CSS commands in different ways.
- e.g. CSS box 的 width and height
  - CSS box 的 width, height 在不同的 browser 會有不同的作法
  - 根據 W3C 的規格, width, height 指的只有內容區, 不含 padding, border, and margin
  - Internet Explorer 有些版本(e.g. 5.5)則包括 content area, padding, and border

# Width and Height Issues of Box Model

- e.g. div {  
    width: 300px;  
    height: 200px;  
    padding: 10px;  
    border: 1px solid black;  
    margin: 15px;  
}  
    只有 margin 可是負值

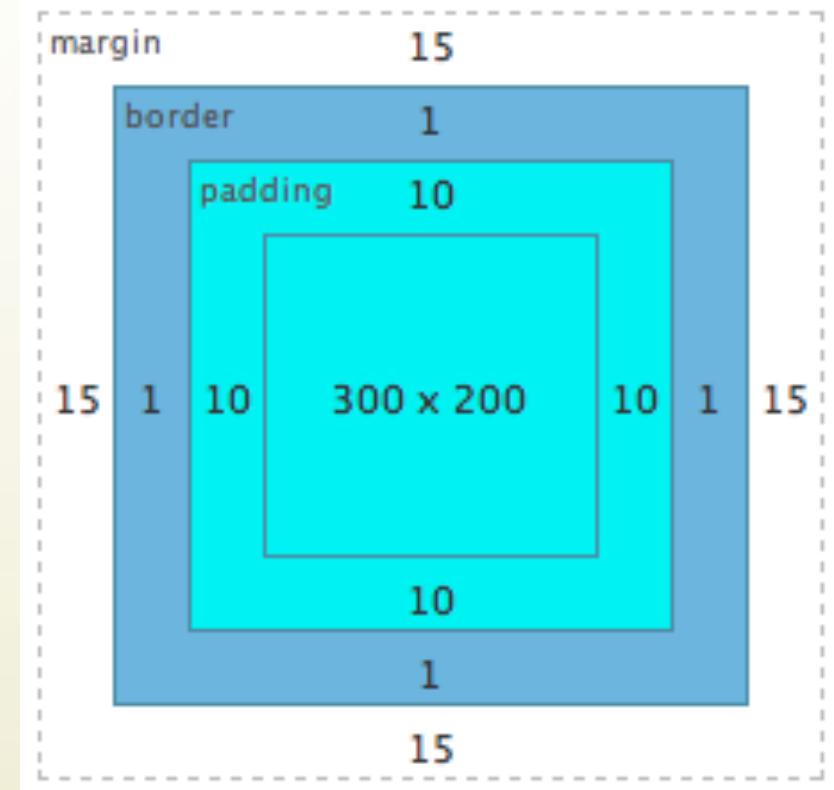

- 若依 W3C 的規格，width 加上 padding, border，整個 box 的大小為  $352 * 252$
- 在 IE5.5 則因 width 已含 padding, border，整個 box 的大小為  $330 * 230$

# box-sizing property

認保規格

- CSS3 明訂 box 的計算方式
- **box-sizing: content-box | padding-box | border-box | inherit**
  - content-box: 內定值，同 W3C CSS 2.1 規格
  - padding-box: 長寬包括 padding
  - border-box: 長寬包括 padding 及 border
- <http://www.w3.org/TR/css3-ui/#box-sizing>

# note

width, height, padding, border-width 都不可以  
是負值，margin 可以