

Project Design Phase-II

Data Flow Diagram & User Stories


Date	19 September 2026
Team ID	Shaik Irshad - 238W1A4256
Project Name	Automated Network Request Management In ServiceNow
Maximum Marks	4 Marks

Data Flow Diagrams

A Data Flow Diagram (DFD) shows how data enters and leaves the system, what transforms it, and where it is stored. The two diagrams below describe the actual Network Request implementation: a context-level (Level-0) view of the system's external interactions, followed by a Level-1 view of the internal processes and the backend data store.


Level-0 — Context Diagram

Level-0 DFD (Context Diagram)

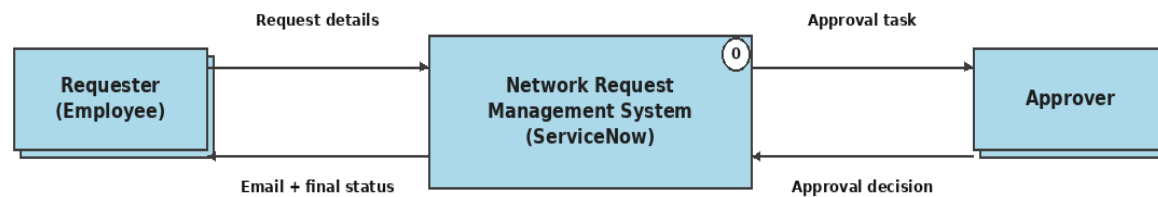

Level-1 — Detailed Process View

Level-1 DFD — Network Request Process

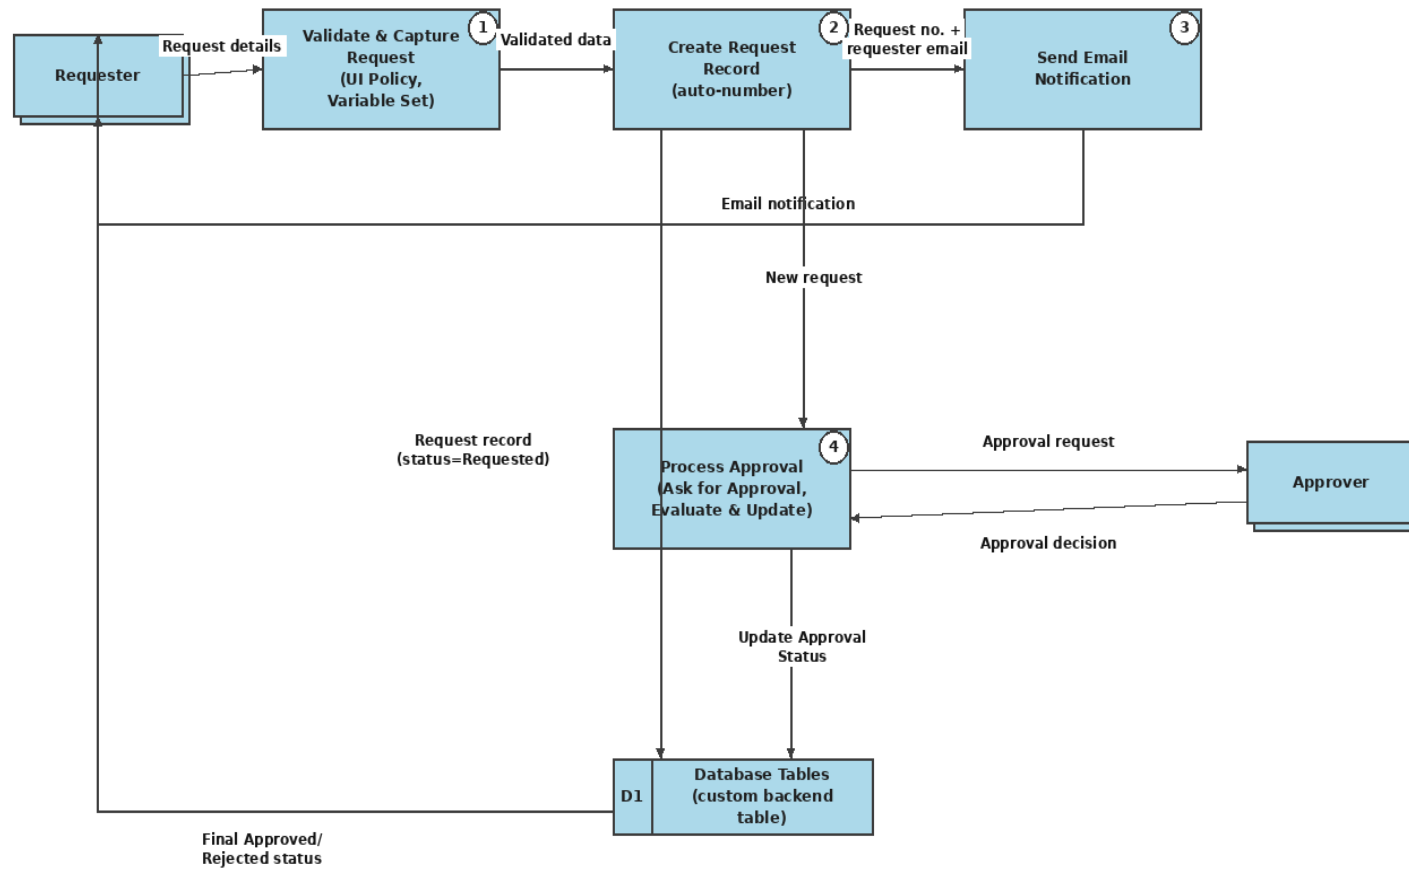

User Stories

The table below lists the user stories for the Network Request solution across its three actors — the Requester, the Approver, and the ServiceNow Admin — grouped by the functional epics defined in the Solution Requirements document.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
Requester (Employee)	Network Request Submission	USN-1	As a requester, I can open the Network Request catalog item from the Service Portal and enter my request details.	The Network Request form loads with all fields (Requested For, Mobile Number, Type of Connection, Total Amount, Mode of Payment, Address).	High	Sprint-1
		USN-2	As a requester, I cannot submit the request if a mandatory field is left blank.	Submission is blocked and a validation message appears if Mobile Number, Type of Connection, Total Amount, Mode of Payment or Address is empty.	High	Sprint-1
		USN-3	As a requester, I can select whether my connection is New or Existing.	Choosing New or Existing correctly stores the value in the Type of Connection field.	High	Sprint-1
	Dynamic Form Behaviour	USN-4	As a requester, I only see the “Enter your Existing ID” field when I select Existing connection.	The Existing ID field is hidden for New and visible for Existing, controlled by the Catalog UI Policy.	Medium	Sprint-1
	Requester Info Auto-Population	USN-5	As a requester, my email, name and phone number are filled in automatically once I set “Opened on behalf of”.	Email ID, User Name and Phone Number populate without manual typing, using the User Information variable set.	Medium	Sprint-1
	Email Notification	USN-6	As a requester, I receive an email once my request has been created in the backend.	An email with a greeting, request details and the generated request number arrives in my inbox after submission.	High	Sprint-2
	Status Tracking & Traceability	USN-7	As a requester, I can check whether my request is still pending or has been Approved/Rejected.	The Database Tables record's Approval Status field and related approval list reflect the current state at any time.	High	Sprint-2
Approver	Approval Workflow	USN-8	As an approver, I receive an approval request when a new Network Request is submitted.	A sysapproval_approver record is created and assigned to me as soon as the backend record is created.	High	Sprint-2
		USN-9	As an approver, I can approve or reject a network request.	Selecting Approve or Reject on the approval record is captured by the flow's approval outcome.	High	Sprint-2
		USN-10	As an approver, my decision automatically updates the request's final status.	Approving sets Approval Status = Approved; rejecting sets Approval Status = Rejected on the Database Tables record.	High	Sprint-2
ServiceNow Admin	Backend Configuration	USN-11	As an admin, I can see all submitted network requests as structured records in one custom table.	Every submission creates one row in the Database Tables table with a unique auto-generated Database Number.	Medium	Sprint-1

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
		USN-12	As an admin, I can trace an approval back to the request record it belongs to.	The Approval Request relationship and related list on the Database Tables form show the linked sysapproval_approver record(s).	Medium	Sprint-2
	Security & Access	USN-13	As an admin, I want the new table to be secured without building a custom access framework.	The default ACLs auto-generated by ServiceNow for the new table govern read/write access to Network Request records.	Low	Sprint-2
	Troubleshooting	USN-14	As an admin, I can diagnose why a submission did not trigger the expected automation.	Flow Execution Details, email logs and backend record checks are available to trace each step of a request.	Medium	Sprint-2