

How to test the development version of ZenTimings

1. Disable Driver Signature Enforcement

In order to run the unsigned modules (include fixes which are not released yet), “Driver Signature Enforcement” needs to be disabled.

To disable it, open Windows menu, then click on *Power* → *Restart* while holding *Shift*. Release *Shift* key when you see the blue screen with options.

Select *Troubleshoot*.

Select *Advanced options*.

Select *Startup Settings*.

Click *Restart*.

After your computer restarts, you'll see a list of options. Press the F7 or 7 key to select "Disable driver signature enforcement".

This is only active for the next log on. Restarting the PC in the normal way will enable the option again.

2. Install PawnIO in development mode

Download PawnIO driver from the official site <https://pawnio.eu/> or to ensure compatibility, launch the *PawnIO_setup.exe* installer from the extracted ZenTimings directory.


Select the “Gear” icon.

Select “install unrestricted edition (FOR DEVELOPERS)” in “Settings” dialog.

Click *OK*.

Select left “Install” icon.

Click *OK*.

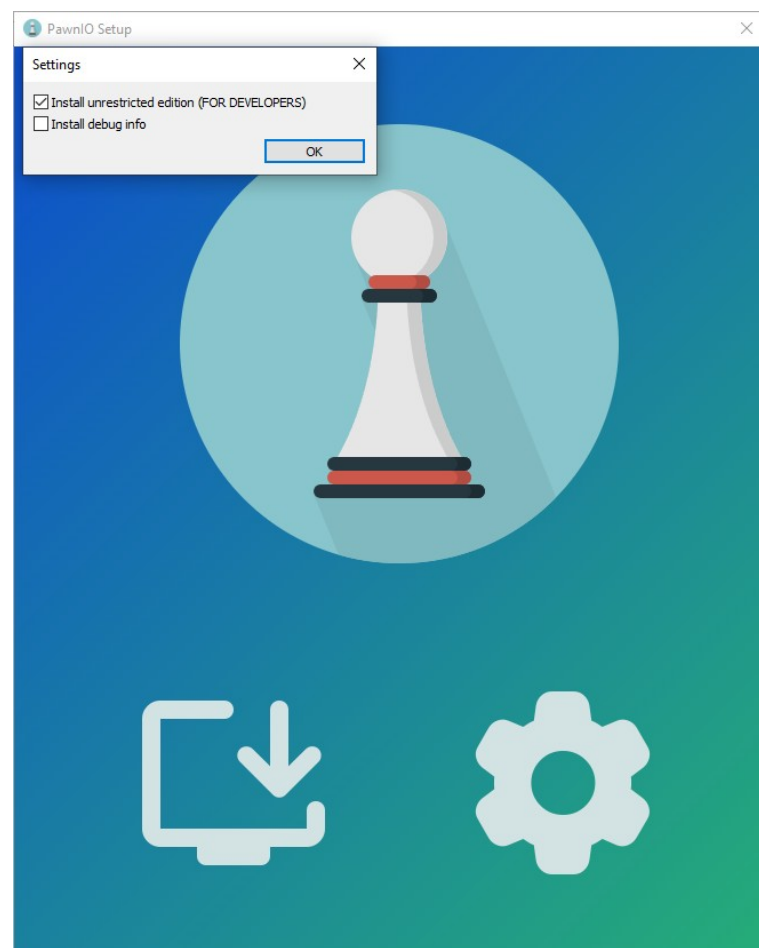

3. Launch ZenTimings.exe