A COMPLETE TRAINING PROCEDURE

Algorithm 1 summarizes the co-evolution loop. Here π_θ is the Actor softmax distribution and μ is the executed policy with uniform exploration. Appendix B specifies budgets, training mixtures, PPO settings, and revision rules.

Input: Learner M_0, principles Σ_0, initialized curriculum Actor–Critic, validation sets $\mathcal{V}$, support evidence $\mathcal{S}$, and horizon E.
Output: Learner checkpoints $\mathcal{K}_E = (M_0, \ldots, M_E)$ and final principles Σ_E.

Evaluate M_0 on $\mathcal{V}$ for o_0; initialize $h_0 = (o_0)$, $\mathcal{K}_0 = (M_0)$, and usage statistics.
for $e = 0, \ldots, E-1$ **do**
  $\mathbf{s}_e \leftarrow \Phi(h_e)$; $\mu_{\text{old}} \leftarrow 0.8\pi_\theta(\cdot \mid \mathbf{s}_e) + 0.05$.
  $a_e \sim \text{Categorical}(\mu_{\text{old}})$; $\ell_e^{\text{old}} \leftarrow \log \mu_{\text{old}}(a_e)$.
  $\boldsymbol{q}_e \leftarrow \mathcal{A}(a_e, h_e)$, preserving task quotas (Eq. 7).
  Plan repair/retention targets and select supporting facts from $\mathcal{S}$ under $\boldsymbol{q}_e$.
  Construct and verify $\mathcal{D}_e^{\text{syn}}$ using Σ_e; record sources and principle versions.
  $\mathcal{D}_e^{\text{mix}} \leftarrow \text{Mix}(\mathcal{D}_e^{\text{syn}}, \mathcal{R}_e)$; $M_{e+1} \leftarrow \mathcal{U}(M_e, \mathcal{D}_e^{\text{mix}})$.
  Evaluate M_{e+1} on the same $\mathcal{V}$ for o_{e+1} and paired learning responses.
  $r_e \leftarrow G_e$ (Eq. 8); $\mathcal{K}_{e+1} \leftarrow (\mathcal{K}_e, M_{e+1})$.
  $h_{e+1} \leftarrow (h_e, a_e, r_e, o_{e+1})$; $\mathbf{s}_{e+1} \leftarrow \Phi(h_{e+1})$.
  Compute one-step advantage and value target from $(\mathbf{s}_e, a_e, r_e, \mathbf{s}_{e+1})$.
  for $k = 1, \ldots, 4$ **do**
    $\mu_{\text{new}} \leftarrow 0.8\pi_\theta(\cdot \mid \mathbf{s}_e) + 0.05$; $\rho_e \leftarrow \exp\big(\log \mu_{\text{new}}(a_e) - \ell_e^{\text{old}}\big)$.
    Update Actor–Critic with clipped PPO (ρ_e), value loss, and entropy $H(\mu_{\text{new}})$.
  end for
  Update window statistics by principle version; $\Sigma_{e+1} \leftarrow \Sigma_e$.
  if an evolution window ends **then**
    Propose revisions from residual errors for eligible principles, preserving the target capability and medical facts.
    Construct and verify paired examples under current/candidate principles using $N = 100$ identical evidence assignments and matched quotas; obtain usable sets $I_{\text{cur}}, I_{\text{cand}}$.
    $\Delta_{\text{use}} \leftarrow \dfrac{|I_{\text{cand}}| - |I_{\text{cur}}|}{N}$; $\rho_{\text{pair}} \leftarrow \dfrac{|I_{\text{cand}} \cap I_{\text{cur}}|}{N}$.
    If $\rho_{\text{pair}} \geq 0.60$, the revision agent semantically reviews up to 30 common usable pairs.
    Replace a principle in Σ_{e+1} if $|I_{\text{cand}}|/N \geq 0.80$, $\Delta_{\text{use}} \geq -0.05$, $\rho_{\text{pair}} \geq 0.60$, and semantic review passes.
  end if
end for
return $\mathcal{K}_E, \Sigma_E$.

Algorithm 1: CoEvoMed: supervision construction driven by learning responses.

Eligible principles have sufficient usage and nonpositive net repair within the evolution window. Semantic review requires the revision to be expressed in generated examples, improve alignment with the targeted errors, and preserve evidence support. Accepted revisions govern the next round; rejected or deferred candidates retain the current version. The stored ℓ_e^{old} remains fixed across the four PPO epochs.

Construction uses selected facts rather than direct image access; verification checks candidates using the image. Linking supervision examples to the construction principle versions used to generate them connects principle usage with validation changes in the corresponding capabilities. The training mixture excludes $\mathcal{V}$ and external benchmarks $\mathcal{B}_{\text{ext}}$. Saved checkpoints support offline trajectory analysis; all six main 8B results use R7 (Appendix C.4). External benchmark results do not guide adaptation.

B TRAINING CONFIGURATION

Learner training. Qwen3-VL-8B-Instruct is the primary learner, with Qwen3-VL-32B used for the 2D scaling experiments. Each round continues from the preceding learner's parameters, using accepted evidence-grounded supervision $\mathcal{D}_e^{\text{syn}}$ mixed with the prescribed original or replay data $\mathcal{R}_e$. Supervised fine-tuning (FullSFT) updates all parameters of the language model and multimodal merger while freezing the vision tower. The 2D training configuration specifies one full epoch per round over $\mathcal{D}_e^{\text{mix}}$, with training duration determined by the epoch count (`max_steps=-1`). We use AdamW (Loshchilov & Hutter, 2019) with $\beta_1 = 0.9$, $\beta_2 = 0.999$, $\epsilon = 10^{-8}$, and weight decay 0.1, excluding biases and other exempt parameters. The language model and merger both use a learning rate of 10^{-5}, with cosine decay and a warmup ratio of 0.03. Training uses 24 NVIDIA A100 80 GB GPUs across three nodes, with eight GPUs per node. A batch size of one per GPU and one gradient accumulation step yield an effective global batch size of 24. Computation uses BF16 and DeepSpeed ZeRO-3 (Rajbhandari et al., 2020), with gradient checkpointing disabled. For volumetric inputs, TF32 is enabled and the pixel count per slice frame is constrained to 65,536–196,608.

Agent roles and models. The five agents coordinate supervision construction, curriculum allocation, and principle revision. The evidence selector uses deepseek-v4-flash to select supporting evidence, and the supervision constructor uses the same model to generate training examples under the construction principles. The evidence verifier uses Qwen3.6-27B to assess evidence support and factual consistency. The curriculum planner allocates construction effort based on capability feedback and learning progress: a learned Actor–Critic selects allocation actions, while deepseek-v4-flash specifies construction targets and provides action labels for supervised initialization. The revision agent uses deepseek-v4-flash to propose and assess revisions to construction principles based on learning responses. Qwen3.6-27B also supports factual evidence extraction and annotation of validation sets.

Per-round supervision size and task composition. Each training round incorporates 50,000 supervision examples in $\mathcal{D}_e^{\text{syn}}$ that pass evidence verification, with an approximate $7:3$ ratio of visual question answering (VQA) to report generation (caption) by sample count. Within the VQA subset, multiple-choice, binary, and short-answer questions follow an approximate $92:4:4$ ratio. These two levels specify the composition across task families and the distribution of response formats within VQA, respectively.

Learner training objective. For trainable learner parameters ϕ, the update in Equation 4 minimizes

$$\mathcal{L}_e(\phi) = -\mathbb{E}_{(v,x,y)\sim\mathcal{D}_e^{\text{mix}}} \sum_{j=1}^{|y|} \log p_\phi(y_j \mid v, x, y_{<j}), \tag{10}$$

where v, x, and y denote visual input, instruction, and target response. Learning responses are measured on fixed validation cases for each task after each update.

Curriculum-planner initialization. The curriculum planner maps a 40-dimensional state through a shared two-layer MLP with hidden widths 128 and 64 to a four-action Actor and a scalar Critic. The four actions are balanced, repair-heavy, weakness-focused, and retention-heavy. Baseline evaluation statistics inform the construction of 800 capability states spanning balanced performance, broad deficiencies, localized deficiencies, and capability regression. The teacher deepseek-v4-flash assigns curriculum action labels. A split by state group yields 640 training and 160 validation states. Cross-entropy supervision initializes the shared MLP and Actor; the checkpoint after epoch 5 achieves the best validation performance and is selected. The Critic output head is initialized with zero weights and bias and subsequently learned from real feedback. The 800 states constitute initialization supervision, separate from online learner interactions.

PPO optimization. Each curriculum round comprises a decision, supervision construction, learner training, and validation feedback, yielding one environment transition. The Actor–Critic is updated after every round, with four optimization epochs over that round's rollout. With a one-transition rollout, generalized advantage estimation reduces to a one-step temporal-difference estimate. We use Adam (Kingma & Ba, 2015) with learning rate 3×10^{-4}, discount $\gamma = 0.90$, GAE parameter $\lambda = 0.95$, clipping threshold 0.20, value loss coefficient 0.50, entropy coefficient 0.01, and gradient

norm limit 0.50. PPO updates the curriculum planner, while external LLM weights remain fixed. When principle evolution is scheduled, planner optimization precedes principle revision.

Sampling and likelihood ratios under the mixed policy. Let $\pi_\theta(\cdot \mid s) = \mathrm{softmax}(\mathrm{Actor}_\theta(s))$. The executed allocation policy combines the Actor with uniform exploration over four actions:

$$\mu_\theta(a \mid s) = 0.8\pi_\theta(a \mid s) + 0.05.$$

Actions are sampled from $\mu_{\theta_{\mathrm{old}}}$, and their log probabilities $\ell_e^{\mathrm{old}} = \log \mu_{\theta_{\mathrm{old}}}(a_e \mid \mathbf{s}_e)$ are stored at sampling time. These values remain fixed throughout the four optimization epochs. Each epoch recomputes the probability under the mixed policy for the stored state and action, giving the PPO ratio

$$\rho_e(\theta) = \exp\big(\log \mu_\theta(a_e \mid \mathbf{s}_e) - \ell_e^{\mathrm{old}}\big) = \frac{\mu_\theta(a_e \mid \mathbf{s}_e)}{\mu_{\theta_{\mathrm{old}}}(a_e \mid \mathbf{s}_e)}.$$

Entropy regularization also uses μ_θ. This executed policy instantiates the allocation policy in Equation 5.

Reward based on learning progress. Rewards measure validation gains following actual learner updates. VQA uses accuracy; report generation uses $0.5\,\mathrm{ROUGE\text{-}L} + 0.3\,\mathrm{BLEU\text{-}4} + 0.2\,\mathrm{METEOR}$. Gains are averaged within each task family, and the VQA and report families receive equal weight, as in Equation 8.

Principle revision and selection. Persistent construction principles specify question intent, evidence–response relations, conceptual contrasts, and diversity. Learning responses observed within each window identify sufficiently used principles with nonpositive net repair. The revision agent uses summaries of residual errors to propose candidates while preserving the target capability and medical facts. Current and candidate principles are compared on the same $N > 0$ evidence assignments. Let I_{cur} and I_{cand} index assignments yielding usable supervision. Relative usable yield and paired coverage are

$$\Delta_{\mathrm{use}} = \frac{|I_{\mathrm{cand}}| - |I_{\mathrm{cur}}|}{N}, \qquad \rho_{\mathrm{pair}} = \frac{|I_{\mathrm{cand}} \cap I_{\mathrm{cur}}|}{N}. \tag{11}$$

We use $N = 100$ matched assignments, with all requested assignments included in the denominator. Acceptance requires

$$\frac{|I_{\mathrm{cand}}|}{N} \geq 0.80, \qquad \Delta_{\mathrm{use}} \geq -0.05, \qquad \rho_{\mathrm{pair}} \geq 0.60,$$

and a conclusive semantic review. Once paired coverage meets the bound, the revision agent examines up to 30 common usable pairs and must confirm both observable application of the revision and improved alignment with the target error semantics while preserving evidence support. Stylistic changes or changes limited to synonym substitution do not qualify as improvement.

A drop in usable yield exceeding five percentage points, a candidate yield below 0.80 when the current version meets this bound, or semantic regression leads to rejection. Otherwise, insufficient assignments, unmet numerical bounds, or unconfirmed semantic improvement defer the decision. Both outcomes retain the current principle; accepted revisions govern subsequent construction. Selection uses paired supervision comparison, with learner responses assessed in subsequent training rounds.

C Experimental setup and evaluation

We evaluate the trained CoEvoMed-8B model on both 2D and volumetric benchmarks, representing each volume as a video of 64 slice frames.

C.1 Evaluation datasets and inputs

2D benchmarks. We evaluate on six public 2D medical benchmarks spanning radiological and pathological question answering, literature-based visual understanding, and chest radiograph report

generation. CoEvoMed and the baselines evaluated in this study use the same evaluation sets and scoring rules, with dataset sizes listed in Table 3. Question-answer pairs are counted for VQA and report generation instances for MRG.

Table 3: Datasets used for the 2D evaluations conducted in this study. Counts refer to evaluated instances, not the full source collections or unique patients. VQA: visual question answering; MRG: medical report generation.

Benchmark	Task	Instances	Visual evidence and annotation source
VQA-RAD	VQA	451	Radiological images with clinician-authored questions and answers.
SLAKE	VQA	1,061	Radiological images with physician-annotated semantic information and a medical knowledge base.
PMC-VQA	VQA	33,430	Diverse medical figures and captions from open-access biomedical articles, used to construct question-answer pairs.
PathVQA	VQA	6,761	Pathological images and associated question-answer pairs derived from textbooks and digital libraries.
MIMIC-CXR	MRG	2,343	Chest radiographs paired with clinical radiology reports.
IU-Xray	MRG	590	Chest radiographic examinations paired with radiology reports.

VQA-RAD, SLAKE, and PathVQA emphasize radiological or pathological understanding, whereas PMC-VQA spans heterogeneous medical figures (Lau et al., 2018; Liu et al., 2021; He et al., 2020; Zhang et al., 2024). MIMIC-CXR and IU-Xray assess the synthesis of image-grounded findings into reports (Johnson et al., 2019; Demner-Fushman et al., 2016). VQA performance is reported as accuracy. Report generation is evaluated using RaTEScore for agreement in clinical meaning and METEOR, BLEU-1/2/3/4, and ROUGE-1/2/L for complementary lexical agreement.

The medical baselines in Table 1 include MedGemma (Sellergren et al., 2025), GMAI-VL (Li et al., 2026), and MedDr (He et al., 2024). The report-generation comparisons in Figures 3 and 8 also include Qwen2.5-VL (Bai et al., 2025b) and HealthGPT (Lin et al., 2025).

Volumetric benchmarks. The volumetric evaluation comprises 18,883 entries across three complementary tasks: four-choice recognition in M3D-VQA, open-ended question answering in 3D-RAD, and report generation in AMOS-MM (Bai et al., 2024; Gai et al., 2025; Ji et al., 2024). It includes all closed-ended questions in the local M3D-VQA test split, all open-ended questions in the local 3D-RAD test split, and all 400 AMOS-MM validation cases.

Table 4: Composition of the local 3D evaluation sets. Sequence counts are deduplicated by media path within each benchmark; they denote media files rather than unique patients. AMOS-MM uses its validation split for evaluation.

Benchmark	Source split	Evaluated task	Entries	Sequences
M3D-VQA	Test	Four-choice VQA	13,791	2,000
3D-RAD	Test	Open-ended VQA	4,692	2,354
AMOS-MM	Validation	Report generation	400	400

M3D-VQA probes imaging plane, contrast phase, organ recognition, abnormality recognition, and anatomical localization. 3D-RAD covers anatomical and pathological observation, abnormality characteristics, location, type and diagnosis, and quantitative descriptions of diameter, size and thickness. AMOS-MM evaluates longer findings reports describing thoracic, abdominal, and pelvic structures. Its scoring reference is the *findings* field, without concatenating the impression. Reference answers are reserved for scoring and excluded from inference inputs.

Volumetric inputs and preprocessing. The common input representation consists of 64 slices sampled uniformly along volume depth, with repeated sampling for shorter sequences. Slices are resized to a target longest side of 512 pixels and stored in spatial order (H.264 MP4, yuv420p, 16-pixel alignment, 1 fps). Native volumetric models retain their input adapters; Photon S2 (Fang

et al., 2026) uses a volume reconstructed from 32 slices in our local evaluation. Decoding is greedy. The selected data contain unique entry IDs, nonempty references, and available media. Preprocessing excludes 109 unreadable image members from four M3D source sequences before sampling, retaining all associated questions.

Volumetric metrics and aggregation. M3D-VQA reports both overall accuracy across all questions and macro-averaged accuracy across five categories. Plane, Phase, and Organ each contain 2,000 questions; Abnormality and Location contain 4,831 and 2,960, respectively. For 3D-RAD, Anomaly Detection, Image Observation, and Medical Computation contain 2,666, 1,024, and 1,002 questions. Our evaluation uses corpus BLEU-1 with WMT 13a tokenization and no smoothing, and ROUGE-1 F1. Each task score averages its constituent subtask scores uniformly (four, two, and three subtasks, respectively). AMOS-MM uses RaTEScore, BLEU-1, ROUGE-L, and METEOR. All scores are scaled to 100. The summaries in Figure 4 use M3D-VQA macro-averaged accuracy across categories, the mean of the three 3D-RAD task ROUGE-1 scores, and AMOS-MM RaTEScore.

C.2 Supplementary benchmark results

Report generation metrics. Figure 8 complements the RaTEScore comparison in the main text with METEOR, BLEU-1/2/3/4, and ROUGE-1/2/L on the same two report benchmarks. These metrics characterize lexical agreement with reference reports; RaTEScore provides the evaluation of clinical meaning in Figure 3.

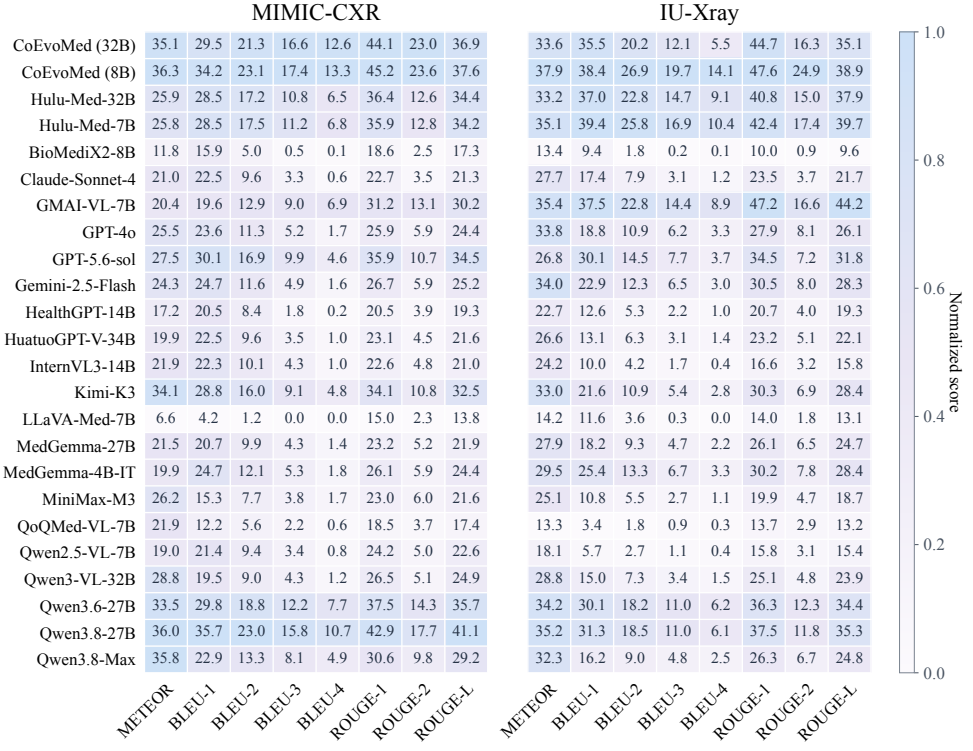


Figure 8: Supplementary lexical metrics for MIMIC-CXR and IU-Xray report generation. Cells show scores on a 0–100 scale, rounded to one decimal; colors are min–max normalized within each metric and dataset. Higher is better. "–" marks unavailable values and is not treated as zero.

Volumetric benchmark results. Figure 9 reports recognition, open-ended question answering, and report generation results. CoEvoMed leads all five M3D-VQA categories, with 80.11% overall accuracy (11,048/13,791) and 83.06% macro-averaged accuracy across categories; Med3DVLM-7B

(Med3DVLM-Qwen-2.5-7B) (Xin et al., 2025) reaches 79.18% overall accuracy. These results support CoEvoMed's applicability across complementary volumetric medical tasks.

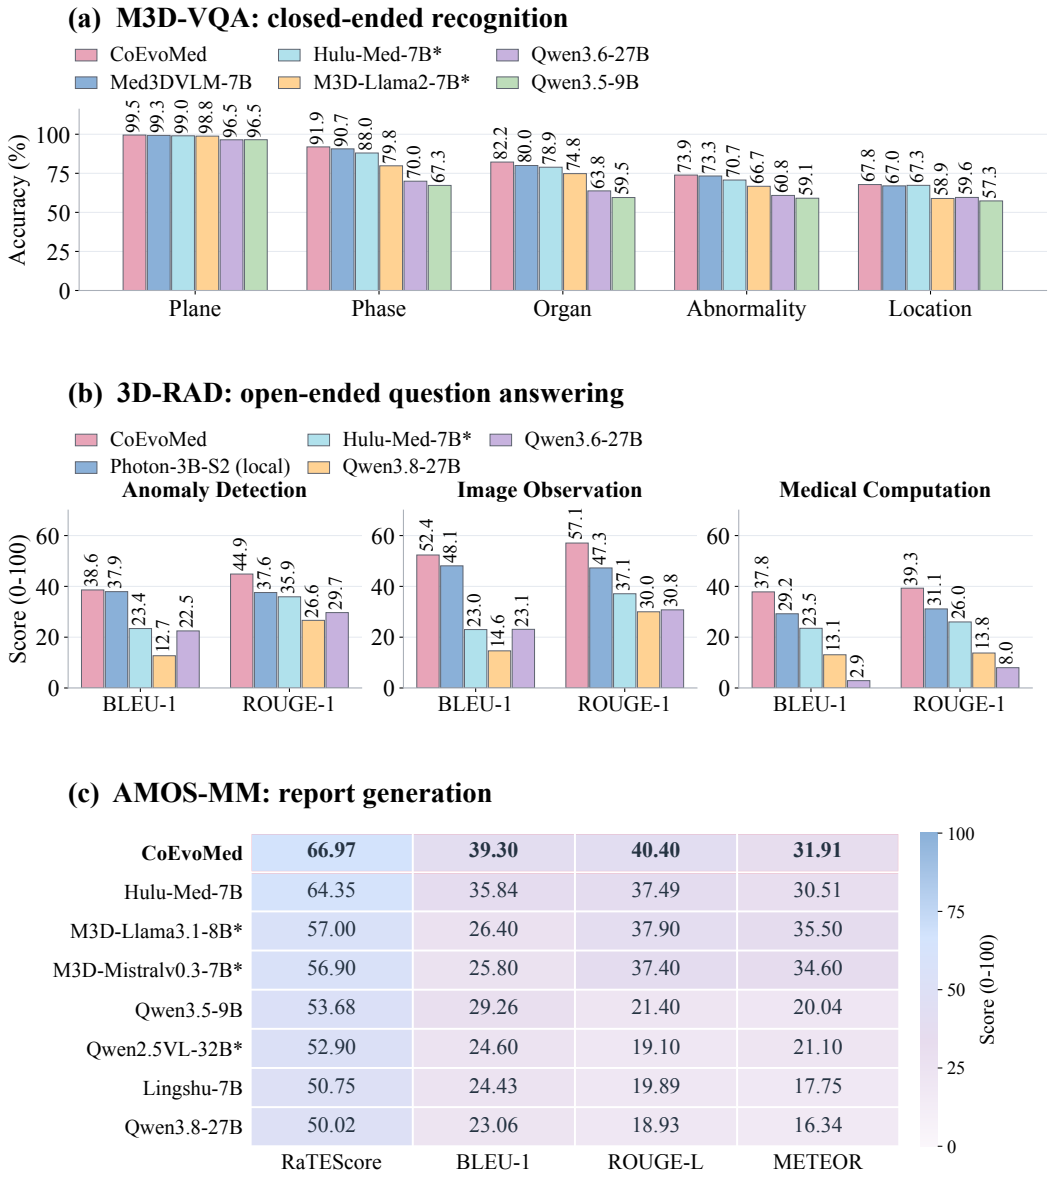


Figure 9: Detailed 3D benchmark profiles. (a) M3D-VQA closed-ended accuracy across five categories. (b) 3D-RAD open-ended BLEU-1 and ROUGE-1 across three tasks; Photon uses its local S2 evaluation. (c) AMOS-MM report generation metrics, with raw values and a fixed 0–100 color scale. Each panel includes CoEvoMed and the highest-ranked available baselines: five by mean category accuracy in (a), four by mean task ROUGE-1 in (b), and seven by RaTEScore in (c). All scores are scaled to 100. Asterisks mark results from Jiang et al. (2025).

C.3 Construction of support evidence and validation sets

The support pool $\mathcal{S}$ provides source evidence for supervision construction. Validation sets $\mathcal{V} = \{\mathcal{V}_t\}_{t\in\mathcal{T}}$ organized by task assess learner capabilities and guide adaptation through capability estimates, error semantics, and curriculum returns. External benchmark collections $\mathcal{B}_{\text{ext}}$ are used to report performance of the final model and intermediate checkpoints. We detail the construction of support evidence and validation sets below.

The task taxonomy $\mathcal{T}$ defines the units used for validation feedback. Support sources and their roles in supervision construction are detailed below. The evaluation datasets and input processing for 2D and volumetric tasks are described together in Appendix C.1. Gemma-3-4B-IT trajectories appear in the main text (Figure 5); InternVL3-9B results appear in Appendix C.5. InternVL3-9B uses independently trained models for the two tasks.

2D support sources. The 2D support pool contains 259,767 source records drawn from 11 datasets, spanning medical publication figures, radiological and pathological images, and associated text and labels. Figure 10 summarizes the source composition, and Table 5 provides official resource links.

3D support sources. The 3D support pool contains 215,657 source records drawn from five datasets, comprising 209,329 question–answer pairs and 6,328 reports. It covers anatomical recognition, localization, abnormality characterization, and report generation. The question–answer pairs correspond to 4,228 unique videos, each consisting of 64 ordered slices. Figure 10 summarizes the source composition, and Table 5 provides official resource links.

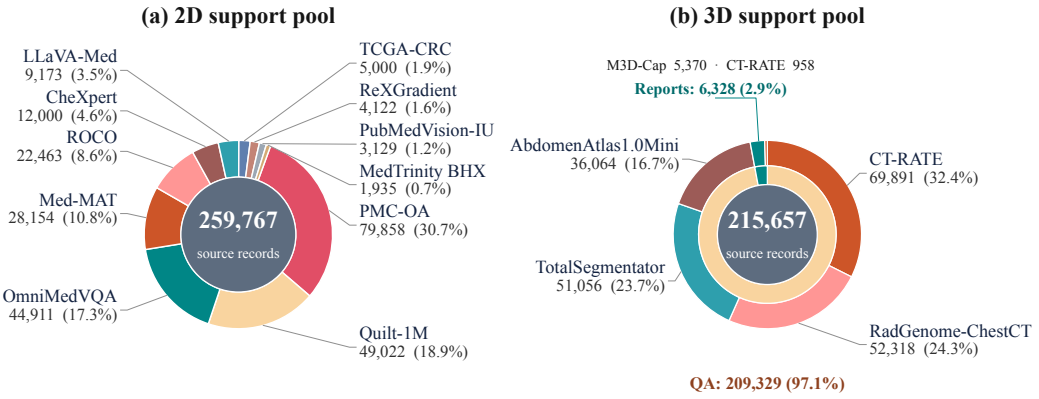


Figure 10: Support-source composition. (a) The 2D support pool contains 259,767 source records. (b) The 3D support pool contains 215,657 source records: the inner ring separates question–answer pairs and reports, and the outer ring identifies their sources. Sector areas and percentages are relative to the total in each panel.

Source evidence normalization and fact extraction. Source preparation converts heterogeneous medical image–text records into reusable factual evidence for learner-conditioned supervision construction. Each record retains its visual input, original text, and source association; report instances preserve multiple images from the same study. Native question–answer pairs and classification labels are converted into factual statements through rule-based transformations, reports are organized by Findings and Impression, and facts are extracted from image captions using Qwen3.6-27B. Source records are annotated along four dimensions—task form, visual capability, imaging modality, and anatomical region—to align evidence retrieval with the capability targets specified by the curriculum.

Quality control examines structural completeness, medical relevance, and factual completeness; records without usable facts are excluded from supervision construction. New records are deduplicated by sample identifier, image path, and RGB pixel content, with additional checks for image overlap with the validation collection. The resulting source pool provides 359,355 reusable facts. This count refers to fact entries, distinct from the source record counts in Figure 10.

Task-based construction of validation sets. Validation sets take medical tasks as their organizing units, with stratified selection from existing medical VQA and report data according to task-specific input attributes and output requirements. Question answering tasks are stratified by language, answer type, question form, and content category; multiple-choice tasks additionally account for correct options and question length. Report generation tasks are stratified by input attributes such as image count. Each validation subset targets 500 instances and preserves instance identifiers, images,

Table 5: Official resources for the support sources. Links for PubMedVision-IU, MedTrinity BHX, and TCGA-CRC lead to their parent datasets.

Dataset	Official resource
2D support	
PMC-OA (Lin et al., 2023)	https://weixionglin.github.io/PMC-CLIP/
Quilt-1M (Ikezogwo et al., 2023)	https://github.com/wisdomikezogwo/quilt1m
OmniMedVQA (Hu et al., 2024)	https://github.com/OpenGVLab/Multi-Modality-Arena
Med-MAT (Cai et al., 2025)	https://github.com/FreedomIntelligence/Med-MAT
ROCO (Pelka et al., 2018)	https://github.com/razorx89/roco-dataset
CheXpert (Irvin et al., 2019)	https://aimi.stanford.edu/datasets/chexpert-chest-x-rays
LLaVA-Med (Li et al., 2023)	https://github.com/microsoft/LLaVA-Med
TCGA-CRC (The Cancer Genome Atlas Network, 2012)	https://gdc.cancer.gov/about-data/publications/coadread_2012
ReXGradient (Zhang et al., 2025a)	https://huggingface.co/datasets/rajpurkarlab/ReXGradient-160K
PubMedVision-IU subset (Chen et al., 2024)	https://huggingface.co/datasets/FreedomIntelligence/PubMedVision
MedTrinity BHX (Xie et al., 2025)	https://github.com/UCSC-VLAA/MedTrinity-25M
3D support	
AbdomenAtlas1.0Mini (Li et al., 2024)	https://huggingface.co/datasets/AbdomenAtlas/AbdomenAtlas1.0Mini
CT-RATE (Hamamci et al., 2026)	https://huggingface.co/datasets/ibrahimhamamci/CT-RATE
RadGenome-ChestCT (Zhang et al., 2025b)	https://huggingface.co/datasets/RadGenome/RadGenome-ChestCT
TotalSegmentator (Wasserthal et al., 2023)	https://github.com/wasserth/TotalSegmentator
M3D-Cap (Bai et al., 2024)	https://huggingface.co/datasets/GoodBaiBai88/M3D-Cap

questions, and original reference annotations. The resulting task-specific collections support ongoing estimation of learner capabilities and learning responses under different task conditions.

Task-based four-dimensional annotation and capability diagnosis. Four-dimensional annotation characterizes the task conditions of each validation instance through its capability targets and evidence attributes (Table 6). Task form and visual capability describe the output structure and principal capability target, while imaging modality and anatomy characterize the underlying medical evidence. Task form is assigned from task requirements and answer format. For visual question answering instances, Qwen3.6-27B supplements the other three dimensions from the image, question, and reference answer, preserving existing modality annotations. Chest X-ray report tasks are labeled as report generation, holistic description, chest X-ray, and chest. Following format and completeness checks, validation performance is aggregated by these task attributes to characterize capability profiles across these targets and identify task priorities for subsequent supervision construction and curriculum allocation.

Table 6: Task-based annotation of validation sets. Task form and visual capability describe capability targets; modality and anatomy describe evidence attributes. Together, they organize task-level capability diagnosis and curriculum adaptation. The visual capability dimension comprises nine categories.

Dimension	Categories or content	Annotation basis
Task form	Yes/no QA, short open-ended QA, long open-ended QA, multiple choice, report generation	Task requirements and answer format.
Visual capability	Modality recognition, organ recognition, localization, spatial relations, abnormality detection, attribute assessment, comparison, holistic description, medical knowledge	The principal capability tested; reports use holistic description.
Imaging modality	CT, MRI, X-ray, ultrasound, pathology images, publication figures, etc.	Existing annotations, supplemented by the model when absent.
Anatomy or tissue	Chest, abdomen, brain, pelvis, limbs, spine, and specific organs or tissues	Visual and textual evidence; unresolved labels remain unknown / other.

C.4 Metrics and statistical reporting

VQA accuracy is computed using predefined exact or semantic matching criteria. Report evaluation includes BLEU-4, METEOR, and ROUGE-L (Papineni et al., 2002; Banerjee & Lavie, 2005; Lin, 2004). The implemented feedback composite is $0.5\,\mathrm{ROUGE\text{-}L} + 0.3\,\mathrm{BLEU\text{-}4} + 0.2\,\mathrm{METEOR}$. Feedback scores U_t^{val} are computed on $\mathcal{V}_t$, while the controlled comparisons use independent external tests. Figure 3 uses RaTEScore, a separate clinical report metric (Zhao et al., 2024), scaled by 100. RaTEScore does not retrospectively replace feedback scores used for curriculum allocation. Metric implementations and exact/semantic matching choices must be fixed before controlled comparisons. Experiments 1 and 2 report scores and paired contrasts in Tables 7 and 8.

For longitudinal capability analysis, freeze cell definitions, sample panels within $\mathcal{V}_t$, decoding settings, and scoring rules in which higher scores indicate better performance before comparison. Compute $\mathcal{J}_c[M_e]$ on fixed nonempty validation sets, reporting case counts, per-cell changes, and repaired/regressed case transitions. Learning responses are characterized by evaluation metrics aligned with each task's objective. Independent validation feedback at round e guides subsequent curriculum allocation and revision of construction principles. External benchmarks evaluate model performance across rounds and do not inform curriculum decisions. Figure 7 reports all ten recorded rounds, including later performance declines. Sparse cells are reported as unsupported, not interpreted as evidence of capability change.

Checkpoint selection. The CoEvoMed-8B checkpoint is selected according to the overall balance of medical question answering and report generation across training rounds. R7 provides the most balanced overall capability profile among the ten recorded rounds and is used for all six main 2D results. Evaluation using the same checkpoint preserves the joint capability profile of a single learner; individual benchmark peaks occur at R7–R8 in Figure 7.

C.5 InternVL3-9B cross-backbone evaluation

Figure 11 reports InternVL3-9B trajectories on VQA-RAD and MIMIC-CXR. The two tasks use independently trained models, with full-parameter supervised fine-tuning through LLaMA-Factory (Zheng et al., 2024); each round continues from the preceding round's weights. The curves include the baseline and all eight completed training rounds.

VQA-RAD accuracy increases from 56.98% to 77.38% at round 8, a gain of 20.40 percentage points, and peaks at 78.71% at round 6. MIMIC-CXR RaTEScore increases from 50.55 to 63.83, a gain of 13.28 points, with a maximum of 65.34 at round 4. The two trajectories reach their maxima at different stages and retain substantial gains at the final round.

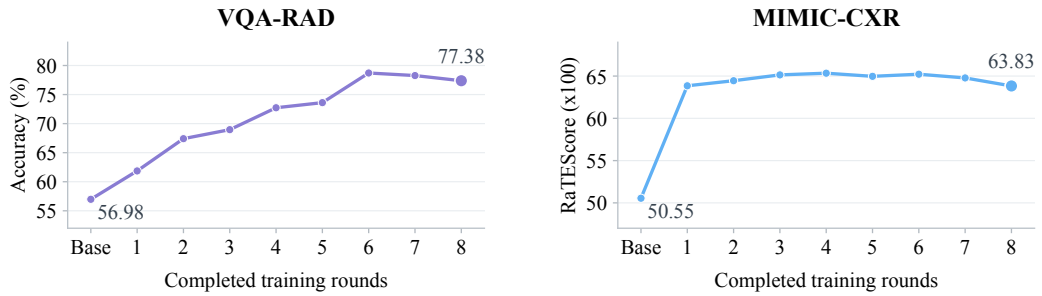


Figure 11: InternVL3-9B learning trajectories. Left: VQA-RAD accuracy (%). Right: MIMIC-CXR RaTEScore, scaled by 100. The panels correspond to independently trained task-specific models. Base denotes the initial model; rounds 1–8 denote completed training rounds. Only baseline and final values are annotated.

C.6 Feedback provenance and independence

CoEvoMed uses validation sets $\mathcal{V}$ organized by task and independent of the final evaluation data. Learning responses on these validation sets provide capability estimates and curriculum rewards and guide the revision of construction principles. External benchmark collections $\mathcal{B}_{\text{ext}}$ are reserved for performance evaluation and do not participate in supervision construction, learner training, or curriculum and principle updates.

D Curriculum interventions and component controls

D.1 Experiment 1: feedback–learner alignment

Experiment 1 fixes the learner's initial state at R5 and uses historical validation feedback from R2 or R3, or current R5 feedback. Feedback comprises numerical capability statistics describing task-level mastery and learning changes, and summaries of error semantics characterizing unresolved failure modes. Both components are jointly replaced with records from the same source round to guide curriculum allocation and supervision construction, testing alignment between validation-based diagnosis and the current learner state. Table 7 extends panel A of Table 2 to six 2D benchmarks under the evaluation settings in Appendix C.1. All changes are measured against the same R5 reference scores measured before further training. The condition using current feedback shares its training result with condition D of Experiment 2 and corresponds to round 6 in Figure 7.

Table 7: Full results with the R5 learner fixed and numerical capability statistics and summaries of error semantics jointly replaced by R2, R3, or R5 feedback. VQA reports accuracy (%); report generation uses RaTEScore ($\times 100$). Parentheses give changes from the R5 reference scores measured before further training.

Condition	VQA-RAD	SLAKE	PMC-VQA	PathVQA	MIMIC-CXR	IU-Xray
R5 reference	73.61	89.00	64.60	65.80	59.00	61.63
R2 feedback	72.51 (−1.10)	83.80 (−5.20)	61.00 (−3.60)	62.70 (−3.10)	59.11 (+0.11)	58.61 (−3.02)
R3 feedback	71.84 (−1.77)	83.20 (−5.80)	62.80 (−1.80)	63.40 (−2.40)	58.16 (−0.84)	57.59 (−4.04)
R5 feedback	76.23 (+2.62)	89.69 (+0.69)	65.12 (+0.52)	66.93 (+1.13)	61.77 (+2.77)	62.91 (+1.28)

Current R5 feedback outperforms both conditions using historical feedback and the reference scores measured before further training on all six benchmarks. Gains over the reference are 2.62 percentage points on VQA-RAD and 2.77 points on MIMIC-CXR, and 0.69, 0.52, 1.13, and 1.28 points on SLAKE, PMC-VQA, PathVQA, and IU-Xray, respectively. R3 feedback reduces performance on all six benchmarks, whereas R2 feedback yields only a marginal improvement on MIMIC-CXR; their relative ordering varies across tasks. These results support jointly updating numerical and semantic

feedback to align subsequent curriculum interventions with the learner's current capabilities and error patterns.

D.2 Experiment 2: stage-dependent utility of construction principles

Experiment 2 applies original and evolved construction principles to learners after two (R2) and five (R5) completed training rounds. Conditions A/B initialize from the R2 checkpoint and C/D from R5, followed by training interventions using their assigned principles. Table 8 extends panel B of Table 2 in the main text to six benchmarks under the same evaluation settings as Experiment 1. Changes are measured against reference scores measured before further training at the corresponding stage. The R5 reference and condition D correspond to rounds 5 and 6 in Figure 7.

Table 8: Complete Experiment 2 results on six 2D benchmarks. Parentheses give changes from reference scores measured before further training at the corresponding stage.

Condition	VQA-RAD	SLAKE	PMC-VQA	PathVQA	MIMIC-CXR	IU-Xray
R2 reference	61.64	81.60	50.80	62.00	53.31	52.87
A: R2 / original	63.42 (+1.78)	84.20 (+2.60)	54.20 (+3.40)	65.80 (+3.80)	56.35 (+3.04)	56.77 (+3.90)
B: R2 / evolved	59.20 (−2.44)	81.00 (−0.60)	48.00 (−2.80)	65.40 (+3.40)	56.47 (+3.16)	56.69 (+3.82)
R5 reference	73.61	89.00	64.60	65.80	59.00	61.63
C: R5 / original	67.97 (−5.64)	85.40 (−3.60)	55.00 (−9.60)	63.60 (−2.20)	52.56 (−6.44)	57.52 (−4.11)
D: R5 / evolved	76.23 (+2.62)	89.69 (+0.69)	65.12 (+0.52)	66.93 (+1.13)	61.77 (+2.77)	62.91 (+1.28)

All four VQA benchmarks exhibit a reversal in principle ordering: original principles perform better at R2, whereas evolved principles perform better at R5. On VQA-RAD, original principles lead by 4.22 percentage points at R2, while evolved principles lead by 8.26 at R5. The score differences (evolved minus original) on SLAKE, PMC-VQA, and PathVQA change from -3.20, -6.20, and -0.40 to $+4.29$, $+10.12$, and $+3.33$ percentage points, respectively. Both report tasks benefit from either version at R2, with small differences between the two principle versions: evolved principles lead by 0.12 points on MIMIC-CXR, while original principles lead by 0.08 on IU-Xray. At R5, evolved principles lead by 9.21 and 5.39 points, respectively. Condition D improves over the R5 reference on all six benchmarks. These results show that the utility of construction principles varies with learner stage, supporting their continued revision in response to learning.

D.3 Training on a larger collection of raw data

This comparison examines whether increasing the volume of raw data can account for CoEvoMed's performance gains. Starting from the same Qwen3-VL-8B initialization, Qwen3+Raw trains directly on approximately 700,000 original source examples, exceeding the number of training examples used by CoEvoMed. It retains the original supervision without supervision reconstruction or adaptive curriculum allocation. We evaluate both conditions on the four VQA benchmarks in Appendix C.1.

Table 9: Medical VQA accuracy (%) from a shared Qwen3-VL-8B initialization. Qwen3+Raw uses approximately 700,000 source examples; CoEvoMed uses fewer training examples. The base model is included as a reference.

Training condition	PMC-VQA	VQA-RAD	SLAKE	PathVQA
Qwen3-VL-8B (base)	54.13	56.76	64.84	42.77
Qwen3+Raw	45.51	43.01	38.15	35.94
CoEvoMed-8B	**67.95**	**82.48**	**91.60**	**69.40**

Despite using less training data, CoEvoMed exceeds Qwen3+Raw by 22.44, 39.47, 53.45, and 33.46 percentage points on PMC-VQA, VQA-RAD, SLAKE, and PathVQA, respectively. Training directly on source data falls below the initial model on all four benchmarks, whereas CoEvoMed improves on each. Thus, a larger collection of raw data does not reproduce CoEvoMed's gains. These results support the effectiveness of supervision construction driven by learning responses and curriculum adaptation in translating source evidence into supervision suited to the learner's evolving needs.

E SCOPE OF THE FORMULATION

The curriculum construction map is a stochastic, learner-conditioned transformation. Experience generation and allocation shape learning trajectories by influencing capability development through training. Finite validation panels provide partial capability evidence, and covered cells retain their own scoring scales. Independent external tests assess generalization after repeated validation-driven adaptation.

Local interventions establish evidence at the tested learner states and construction versions. Applicability claims are restricted to the evaluated data and backbone-specific settings. Medical benchmark performance and source-grounded verification do not establish clinical safety or patient benefit.

F FORMAL MODEL AND NOTATION

This appendix formalizes the co-evolution described in Section 3. The learner M_e and the agents' construction principles Σ_e are reciprocally dependent components of the complete state X_e. The map $\mathfrak{C}_e$ in Equation 12 combines allocation, active principles, and evidence verification to produce supervision for the learner update. Responses obtained after the learner update enter history and inform principle revision; $\Phi(h_e)$ supplies the input to the allocation policy. Fixed $\mathcal{J}_c$ evaluate successive capabilities to form the trajectory $\Gamma_E = (\widehat{\boldsymbol{\kappa}}_0, \ldots, \widehat{\boldsymbol{\kappa}}_E)$ over E rounds. The allocation policy optimizes cumulative validation progress within these coupled dynamics.

F.1 CAPABILITY PROFILE AND VALIDATION OBSERVATIONS

Equation 1 defines empirical mastery $\mathcal{J}_c[M_e]$ through a capability evaluation functional that maps the learner's predictive behavior on a fixed validation set to a scalar capability coordinate. The fixed validation set $\mathcal{V}_c$ and instance-level evaluation rule u_c determine this functional. Each $\mathcal{V}_c$ belongs to the validation set $\mathcal{V}_t$ for its task; example identities, scoring rules, and decoding settings are fixed before comparison. Equation 6 measures learning progress as the difference in the same functional evaluated on successive learners, equivalently the mean of paired instance-level evaluation changes on the same set. Initial assessment provides mastery levels; missing observations are marked separately.

VQA feedback records repaired and regressed cases. Report feedback tracks score changes and persistent low scores on $\mathcal{V}_t$; a fixed low-score criterion defines report gaps, rather than one minus a composite score. The feedback summary retains current performance, changes between consecutive rounds, capability gaps, and previous allocations.

Let o_e denote the validation observation at round e, including measured performance and error evidence. The observable interaction history is

$$h_e = (o_0, a_0, r_0, \ldots, a_{e-1}, r_{e-1}, o_e), \qquad \mathbf{s}_e = \Phi(h_e).$$

Here a_e is a curriculum action, r_e is the reward in Equation 8, and Φ compresses history into the planner's input. Round e uses Σ_e to construct supervision and update the learner, then appends a_e, r_e, o_{e+1} to history. Equation 9 uses the resulting h_{e+1} to revise principles, producing Σ_{e+1} for the next round. The curriculum planner acts on the history summary; the transition of the complete system state is defined on X_e.

F.2 COMPLETE STATE AND PARTIALLY OBSERVABLE DYNAMICS

For a prescribed rule $\mathscr{E}$ governing the evolution of construction principles, the finite-horizon process is

$$\mathcal{M}_{\mathscr{E}} = (\mathcal{X}, \mathcal{A}_{\text{act}}, \mathcal{O}, P_{\mathscr{E}}, \Omega, R, \rho_0, \gamma, E).$$

The spaces $\mathcal{X}$, $\mathcal{A}_{\text{act}}$, and $\mathcal{O}$ contain complete system states, admissible curriculum actions, and validation observations, respectively. The kernel $P_{\mathscr{E}}$ describes state transitions including updates to construction principles, and Ω describes observations conditional on the complete state. The reward rule R produces the reward in Equation 8; ρ_0 is the initial state distribution, γ the discount factor, and E the number of decision rounds.

The state $X_e \in \mathcal{X}$ contains the learner parameters and training state, active construction principles, retained training data, feedback and evolution statistics, scheduling information, and remaining

resources. The state retains the information required for subsequent updates under the fixed execution rules. Equation 2 gives the Markov transition used in the main formulation. Initialization and observations satisfy $X_0 \sim \rho_0$ and $o_e \sim \Omega(\cdot \mid X_e)$. Training-induced capability changes occur within the state transition; they do not require a time-varying transition kernel on this complete state. Construction, filtering, learner optimization, and scheduled updates to construction principles all contribute to the transition. One implementation episode corresponds to one decision step, not an entire POMDP trajectory.

F.3 Training distribution and resource constraints

The multi-agent roles in Section 4.1 realize the stochastic curriculum construction map

$$\mathcal{D}_e^{\mathrm{syn}} = \mathfrak{C}_e(\mathcal{S}, h_e), \qquad \mathfrak{C}_e = \mathfrak{C}[\mu_{\theta_e}, \Sigma_e]. \tag{12}$$

The map combines policy-guided allocation, principle-conditioned generation, and evidence-grounded verification. Its accepted supervision enters the training mixture in Equation 4. Equation 3 characterizes the distribution of candidate examples before verification; the round index includes dependence on current history h_e and curriculum action a_e.

Let $z = (v, x, y)$ be a constructed example consisting of a visual input, instruction, and target response. Given feedback $\mathbf{s}_e$, the sampled action $a_e \sim \mu_\theta(\cdot \mid \mathbf{s}_e)$ determines quota shares $q_{e,c}$ for constructing candidate examples through the allocation map. The conditional constructor g_{Σ_e} specifies generation using the active construction principles and support evidence. Before quality filtering, their joint contribution is

$$p_e(z, c \mid h_e, a_e, \Sigma_e) = q_{e,c}\, g_{\Sigma_e}(z \mid c, \mathcal{S}, h_e, a_e). \tag{13}$$

Marginalizing over c yields Equation 3, with $g_{e,c}(z; \Sigma_e, \mathcal{S}) = g_{\Sigma_e}(z \mid c, \mathcal{S}, h_e, a_e)$. The shares $q_{e,c}$ serve as mixture weights for the candidate distributions, sum to one over $\mathcal{C}$, and obey Equation 7. This factorization describes the marginal distribution of an example drawn according to candidate quotas; generation within a batch may be dependent. Filtering changes accepted examples and their proportions; realized exposure additionally depends on original or replay data and sampling during training. Candidate counts, accepted counts, training tokens, and costs of model calls are recorded separately.

Principles Σ_e and shares $\boldsymbol{q}_e$ control candidate content and cross-capability composition, respectively; filtering and mixing further determine the training distribution. Learner optimization uses the loss over response tokens in Equation 10, allocation is learned through PPO, and principle revision compares examples generated from the same medical evidence (Section 4.3). Fixed validation criteria $\mathcal{J}_c$ record the resulting capability changes, supplying learning responses for subsequent adaptation.

The shorthand objective in Equation 5 restricts the search to policies that satisfy the budget constraints. Writing the initialization and transition dependencies explicitly gives

$$\begin{aligned} \max_{\pi \in \Pi_{\mathrm{adm}}} \quad & \mathbb{E}_{\rho_0, \pi, P_{\mathscr{E}}, \Omega}\left[\sum_{e=0}^{E-1} \gamma^e r_e\right] \\ \text{subject to} \quad & \sum_{e=0}^{E-1} \mathbf{k}_e \preceq \mathbf{B}, \end{aligned} \tag{14}$$

Here Π_{adm} is the class of policies satisfying constraints on curriculum actions and allocation quotas. The vector $\mathbf{k}_e$ records resource consumption in round e, $\mathbf{B}$ contains the corresponding total budgets, and $\preceq$ imposes each budget componentwise. The expectation includes stochastic curriculum actions, data construction, and learner updates under the fixed execution procedure.

The prescribed rule governing the evolution of construction principles contributes to state transitions and future learning returns; PPO optimizes the allocation policy. The reward equals the validation gain between consecutive models, with equal weight assigned to VQA and report generation. It retains both improvements and regressions. Performance on independent external benchmarks assesses the resulting generalization separately from discounted training return.

F.4 CUMULATIVE GAINS AND THE LEARNING PROCESS

Using the fixed task family weights and scoring scales in Equation 8, define

$$F_e = \frac{1}{2|\mathcal{T}_{\mathrm{V}}|} \sum_{t \in \mathcal{T}_{\mathrm{V}}} U_t^{\mathrm{val}}(M_e) + \frac{1}{2|\mathcal{T}_{\mathrm{R}}|} \sum_{t \in \mathcal{T}_{\mathrm{R}}} U_t^{\mathrm{val}}(M_e).$$


Then $r_e = F_{e+1} - F_e$. For a fixed horizon $E \geq 1$ and $0 < \gamma \leq 1$, reindexing gives

$$\begin{aligned} \sum_{e=0}^{E-1} \gamma^e (F_{e+1} - F_e) &= \sum_{e=1}^{E} \gamma^{e-1} F_e - \sum_{e=0}^{E-1} \gamma^e F_e \\ &= -F_0 + (1-\gamma) \sum_{e=1}^{E-1} \gamma^{e-1} F_e + \gamma^{E-1} F_E. \end{aligned} \tag{15}$$


The identity holds for each interaction trajectory; taking expectations yields an equivalent form of Equation 5. A fixed starting learner makes F_0 constant. For $\gamma < 1$, intermediate and terminal performance receive nonnegative weights; at $\gamma = 1$, the intermediate terms cancel. This scalar objective aggregates task performance, while Γ_E retains changes in each capability cell.

G QUALITATIVE DIALOGUE EXAMPLES

Figures 12–16 present CoEvoMed dialogue examples across six 2D and three 3D benchmarks. Each panel pairs the visual input with user queries and model responses. GT denotes the reference answer.

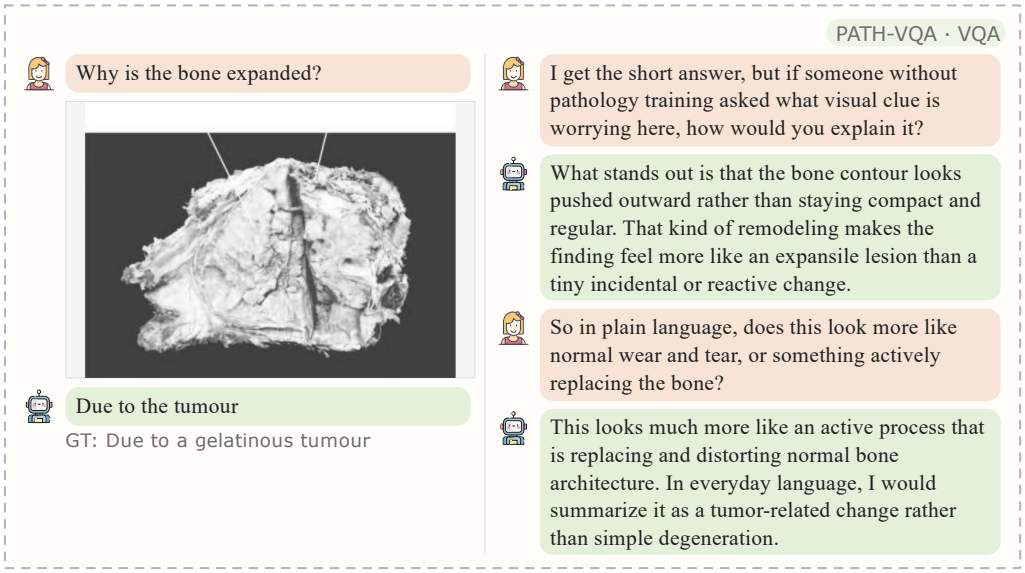

(a) PATH-VQA Showcase

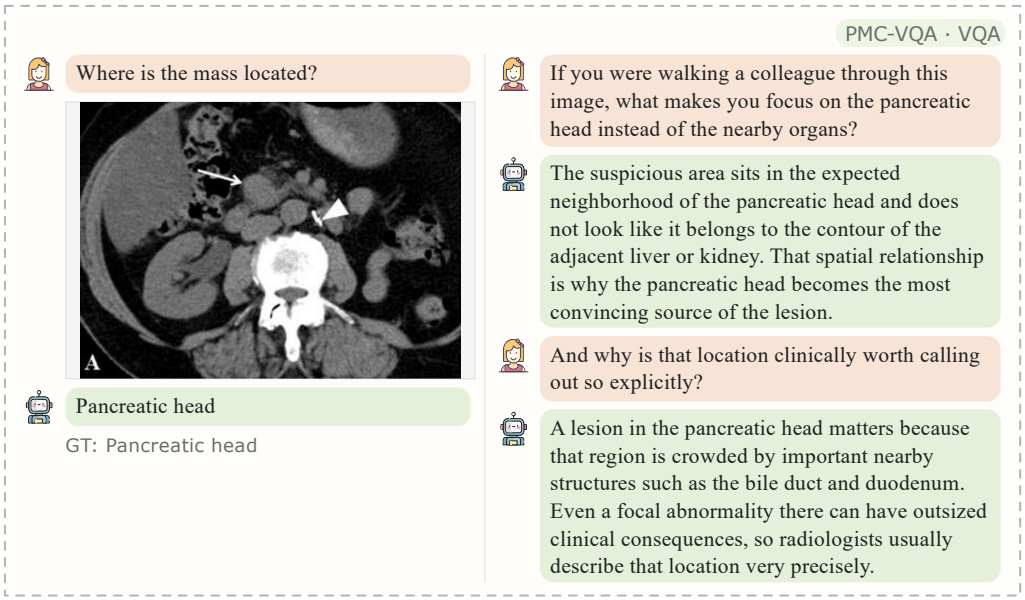

(b) PMC-VQA Showcase

Figure 12: Multi-turn CoEvoMed dialogue examples on PathVQA (top) and PMC-VQA (bottom).

SLAKE · VQA

Which part of the body does this image belong to?



Chest

GT: Chest

If I only had one second to guess the body region, what visual cue would immediately tell me this is the chest?

The paired dark lung fields dominate the scan, with central thoracic structures sitting between them. That overall arrangement is a very recognizable chest pattern and looks quite different from an abdominal CT slice.

Would you describe this image as lung-centered, or is there another structure that deserves attention first?

For a first-pass description, I would definitely call it lung-centered. Other thoracic structures are present, but the lungs are still the most visually dominant anatomy and the easiest anchor point for a non-expert viewer.

(c) SLAKE Showcase

VQA-RAD · VQA

Where is the mass located?



Head of the pancreas

GT: Head of the pancreas

If you were explaining this to a patient, how would you describe that location without leaning too hard on jargon?


I would say the abnormal area appears to be in the head of the pancreas, which is the part of the pancreas sitting near the beginning of the small intestine. That keeps the explanation accurate while making the anatomy easier to picture.

And if the patient asked where that sits in the abdomen, what would you tell them?


I would place it in the upper central-right portion of the abdomen, deeper inside the body and behind the stomach region. That is a simpler spatial description of what we mean by a lesion in the pancreatic head.

(d) VQA-RAD Showcase

Figure 13: Multi-turn CoEvoMed dialogue examples on SLAKE (top) and VQA-RAD (bottom).

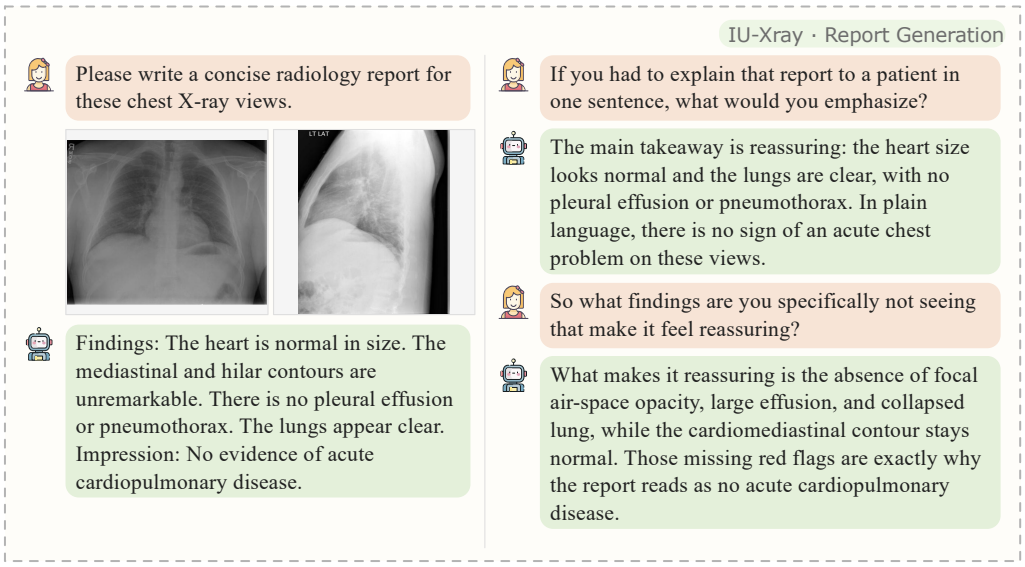


(e) IU-Xray Showcase

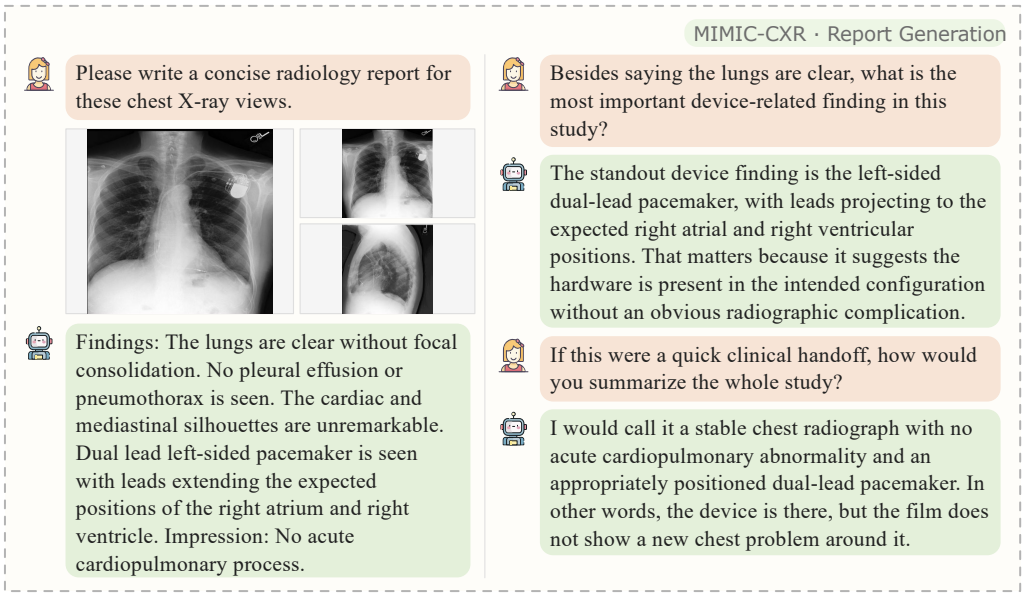


(f) MIMIC-CXR Showcase

Figure 14: Multi-turn CoEvoMed dialogue examples for report generation on IU-Xray (top) and MIMIC-CXR (bottom).

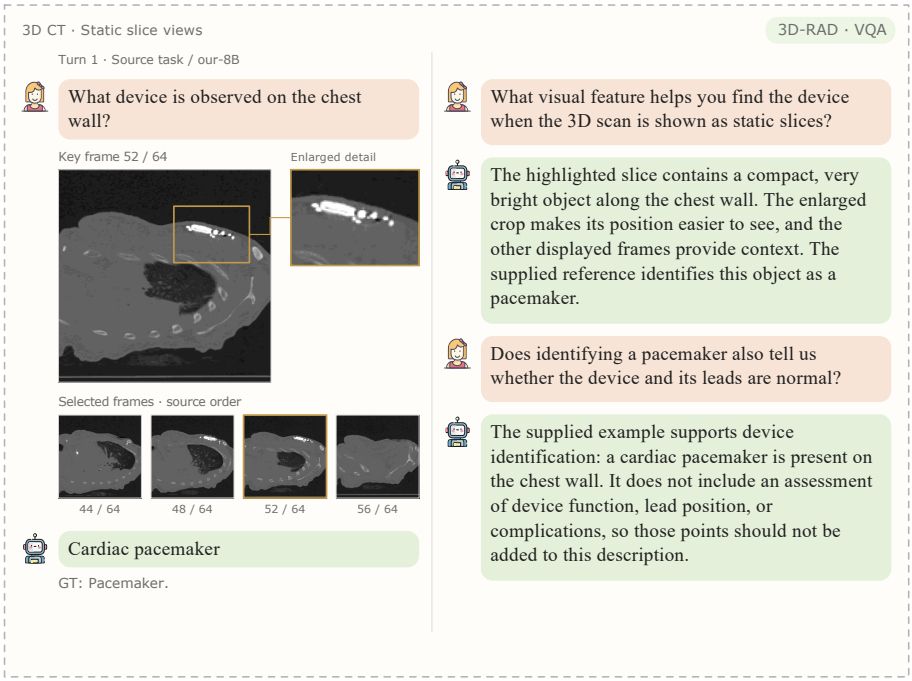


(g) 3D-RAD Showcase

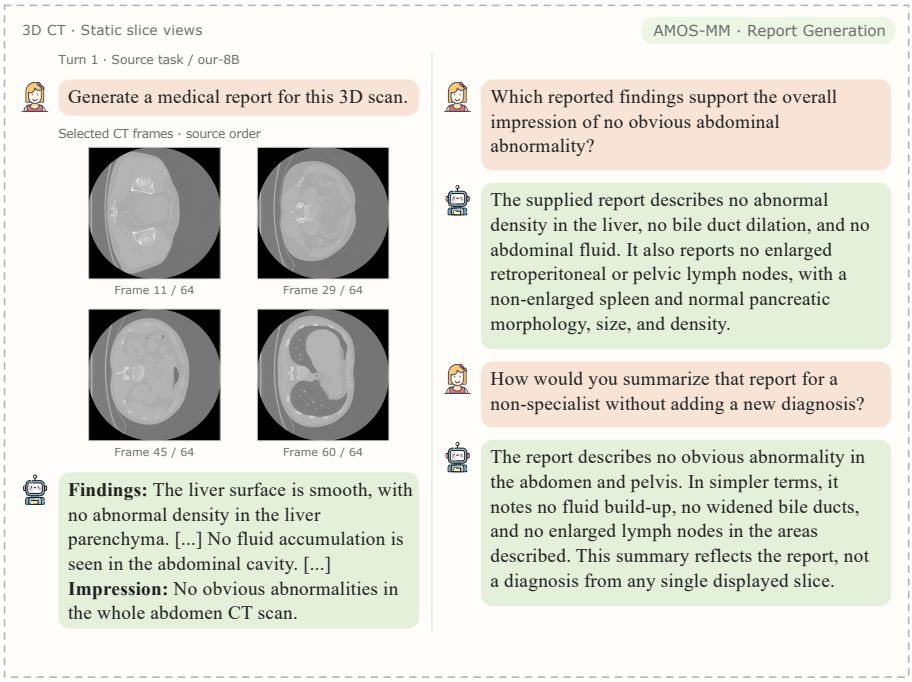

(h) AMOS-MM Showcase

Figure 15: Multi-turn CoEvoMed dialogue examples on 3D-RAD (top) and AMOS-MM (bottom), with selected CT slices. The AMOS-MM report is excerpted for display; ellipses mark omitted text.

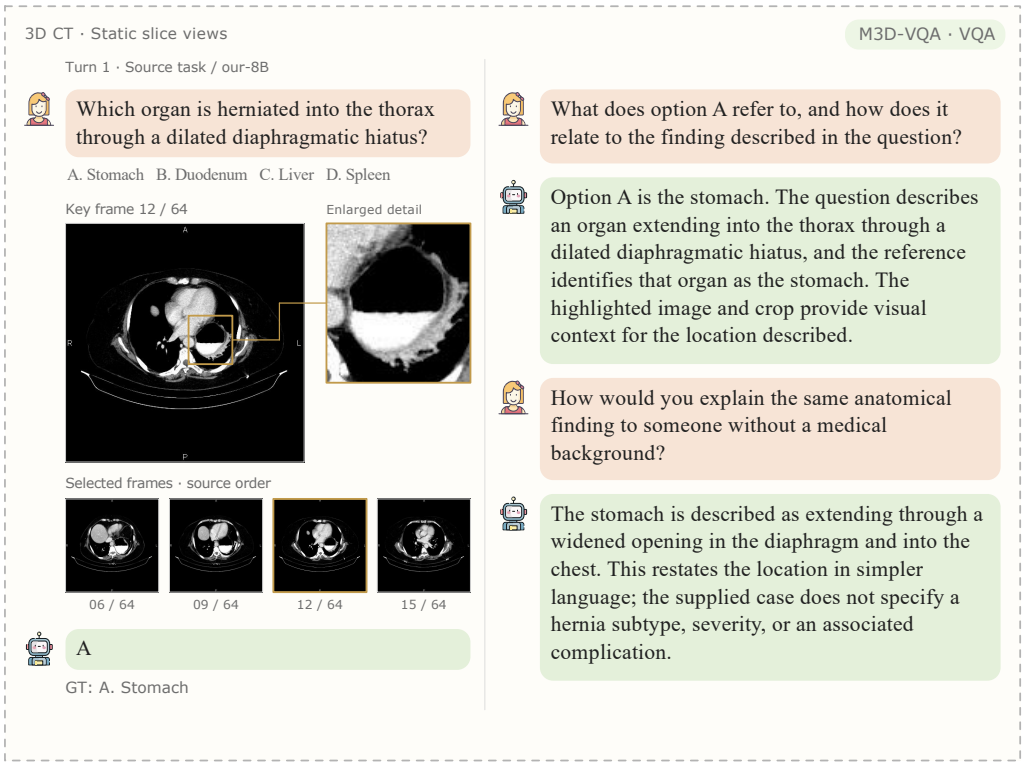

(i) M3D-VQA Showcase

Figure 16: A multi-turn CoEvoMed dialogue example on M3D-VQA, with selected CT slices and an enlarged detail.