

Set up the sample database

Al ya tener la base de datos creada paso directamente al paso de crear las tablas

Creación de las tablas

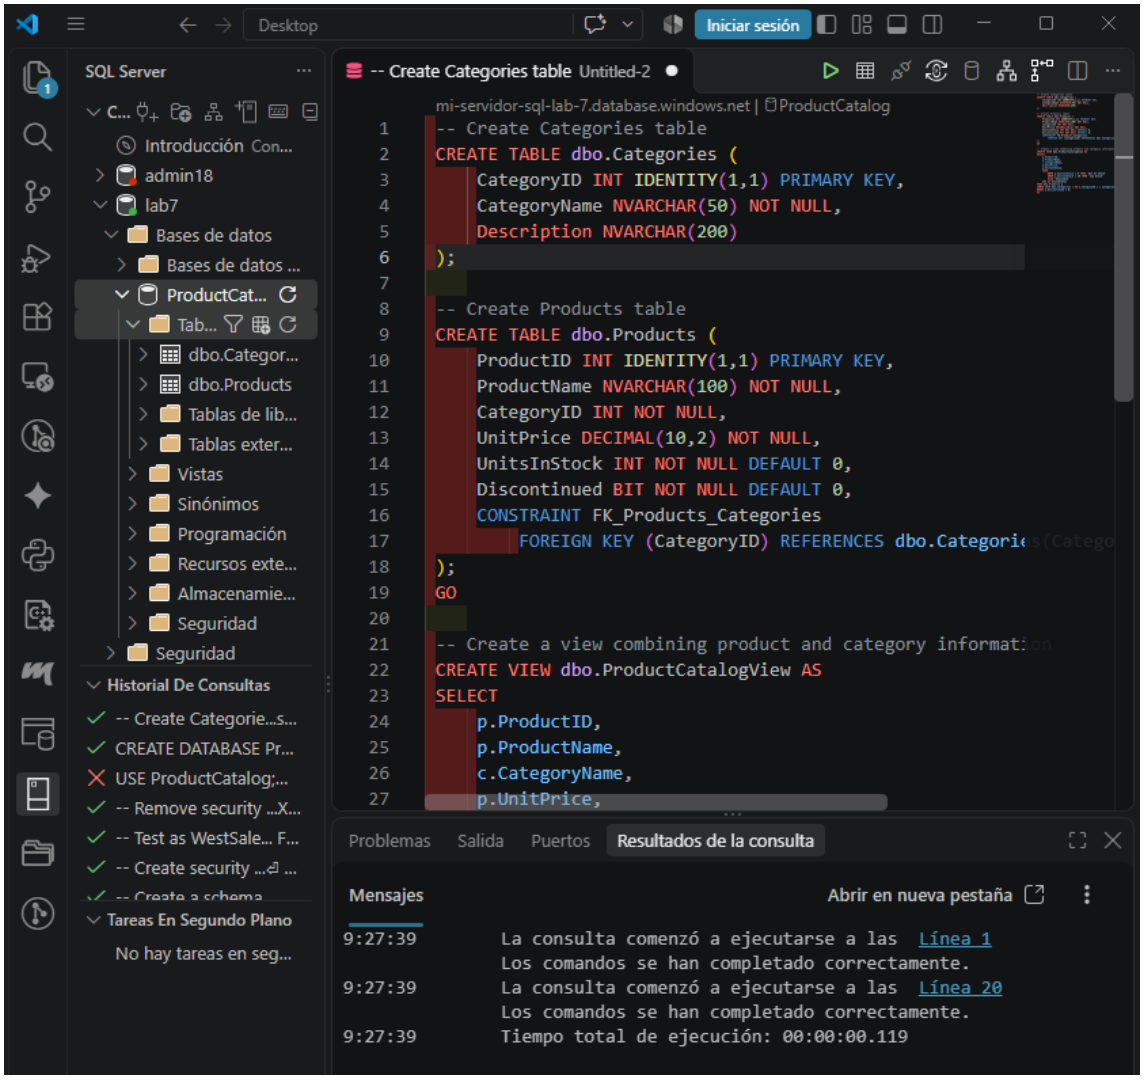

Inserción de datos

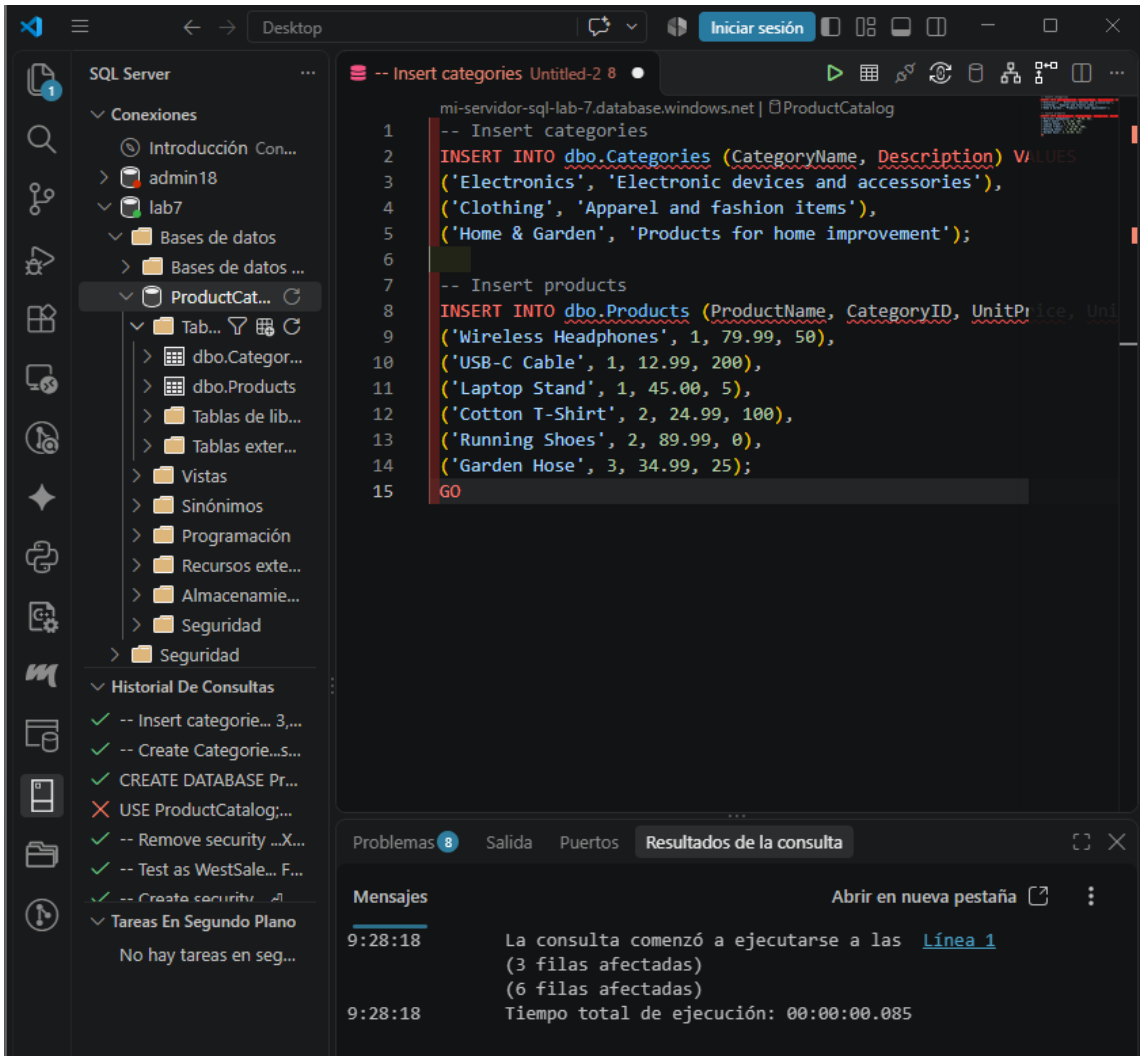

Install Data API Builder CLI

Instalación de dot net

Como ya lo tenia solo he comprobado la versión


```
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1>
dotnet tool install --global Microsoft.DataApiBuilder

Esto es .NET 10.0.
```


```
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1>
dab --version
Microsoft.DataApiBuilder 2.1.5+cd004dbc2ce814ddf45883a8a76ce324fa668e
eb
```

Create the initial configuration

Creamos una carpeta para el proyecto

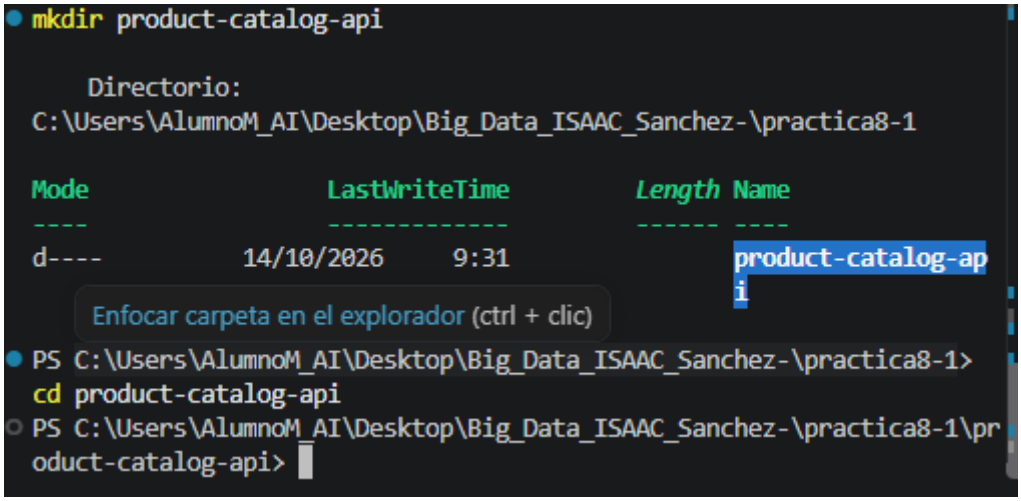

Inicializamos el proyecto de configuración

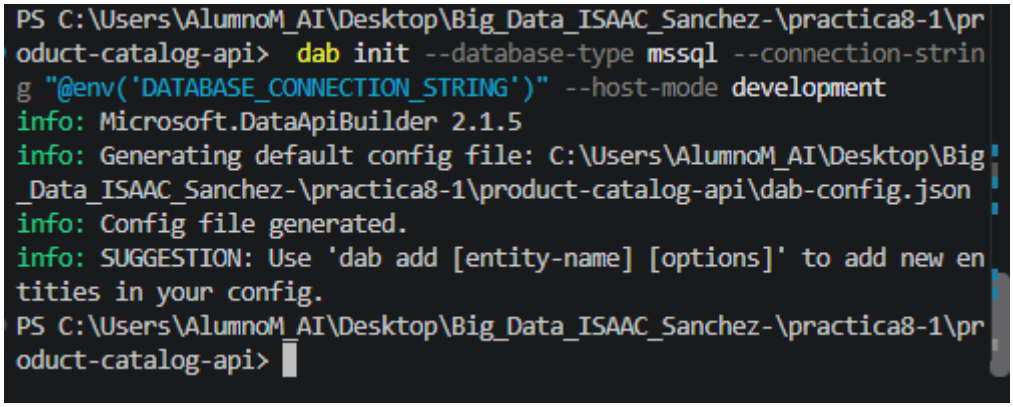

Add entities for tables

Añadimos las categorías de entrada

```
oduct-catalog-api>  dab add Category --source dbo.Categories --permis
sions "anonymous:read"
info: Microsoft.DataApiBuilder 2.1.5
info: Config not provided. Trying to get default config based on DAB_
ENVIRONMENT...
info: Environment variable DAB_ENVIRONMENT is (null)
info: Added new entity: Category with source: dbo.Categories and perm
issions: anonymous:read.
info: SUGGESTION: Use 'dab update [entity-name] [options]' to update
any entities in your config.
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1\pr
oduct-catalog-api>
```

Añadimos los productos

```
oduct-catalog-api>  dab add Product --source dbo.Products --permissio
ns "anonymous:read"
info: Microsoft.DataApiBuilder 2.1.5
info: Config not provided. Trying to get default config based on DAB_
ENVIRONMENT...
info: Environment variable DAB_ENVIRONMENT is (null)
info: Added new entity: Product with source: dbo.Products and permiss
ions: anonymous:read.
info: SUGGESTION: Use 'dab update [entity-name] [options]' to update
any entities in your config.
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1\pr
oduct-catalog-api>
```

Añadimos el crud completo


```
oduct-catalog-api>  dab update Product --permissions "authenticated:*
"
info: Microsoft.DataApiBuilder 2.1.5
info: Config not provided. Trying to get default config based on DAB_
ENVIRONMENT...
info: Environment variable DAB_ENVIRONMENT is (null)
info: Updated the entity: Product.
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1\pr
oduct-catalog-api>
```

Configure field mappings and relationships

Modificamos el archivo json con los nuevos atributos y lo guardamos

Add the view as a read-only entity

Añadimos la vista usando la línea de comandos

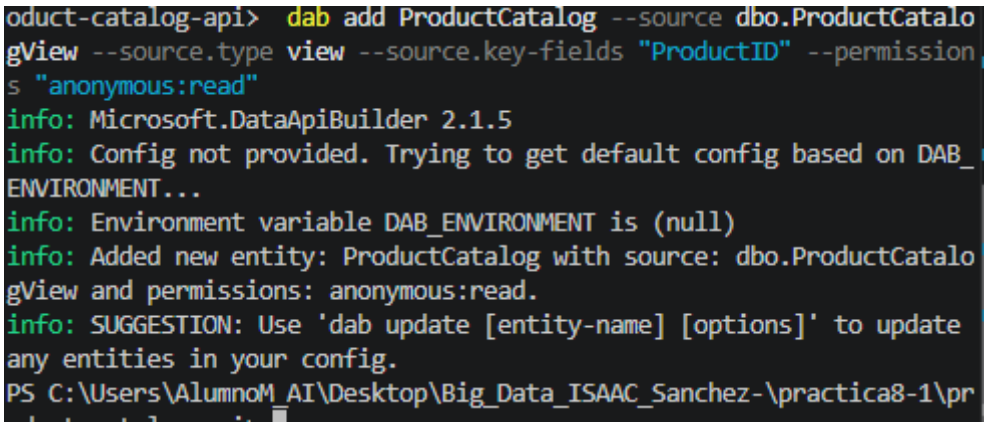

Resultado



Test locally

En una power Shell nos conectamos a la bbdd para iniciar el data api builder

Usando ese comnado realizamos la conexión


```
$env:DATABASE_CONNECTION_STRING="Server=your-server.database.windows.net;Database=ProductCatalog;User Id=your-user;Password=your-password;TrustServerCertificate=true"
```

Ejecutamos el comando dab start

```
PS C:\Users\AlumnoM_AI\Desktop\Big_Data_ISAAC_Sanchez-\practica8-1\pr
oduct-catalog-api>  dab start
info: Microsoft.DataApiBuilder 2.1.5
info: Config not provided. Trying to get default config based on DAB_
ENVIRONMENT...
info: Environment variable DAB_ENVIRONMENT is
info: Loaded config file: dab-config.json
info: Setting minimum LogLevel: Debug.
info: Azure.DataApiBuilder.Core.Services.ISqlMetadataProvider[0]
      [Category] REST path: /api/Category
info: Azure.DataApiBuilder.Core.Services.ISqlMetadataProvider[0]
      [Product] REST path: /api/Product
info: Azure.DataApiBuilder.Core.Services.ISqlMetadataProvider[0]
      [ProductCatalog] REST path: /api/ProductCatalog
info: Azure.DataApiBuilder.Service.Startup[0]
      Response compression enabled with level 'Optimal' for REST, Gra
phQL, and MCP endpoints.
info: Azure.DataApiBuilder.Config.FileSystemRuntimeConfigLoader[0]
      Loading config file from C:\Users\AlumnoM_AI\Desktop\Big_Data_I
SAAC_Sanchez-\practica8-1\product-catalog-api\dab-config.json.
dbug: Azure.DataApiBuilder.Config.FileSystemRuntimeConfigLoader[0]
      DAB telemetry Application Name computed for 'MSSQL' data source
: dab_oss_2.1.5+XXSX||11M000MMM001MMMMMMMM|110?011000001?+
info: Azure.DataApiBuilder.Config.FileSystemRuntimeConfigLoader[0]
      Loading config file from C:\Users\AlumnoM_AI\Desktop\Big_Data_I
SAAC_Sanchez-\practica8-1\product-catalog-api\dab-config.json.
dbug: Azure.DataApiBuilder.Config.FileSystemRuntimeConfigLoader[0]
      DAB telemetry Application Name computed for 'MSSQL' data source
: dab_oss_2.1.5+XXSX||11M000MMM001MMMMMMMM|110?011000001?+
info: Azure.DataApiBuilder.Config.FileSystemRuntimeConfigLoader[0]
      Monitoring config: dab-config.json for hot-reloading.
```

Y abrimos la url http://localhost:5000/graphql en el navegador

Creamos el nuevo documento

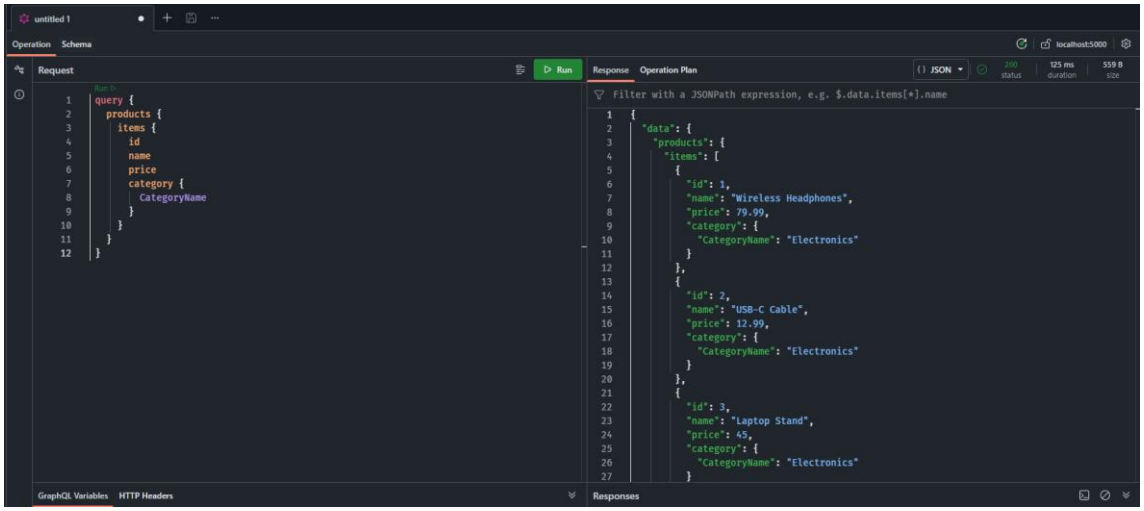

Después paramos con control c en la power shell