
Provision an Azure SQL Database

Creación de la bbdd con los datos aportados por el laboratorio

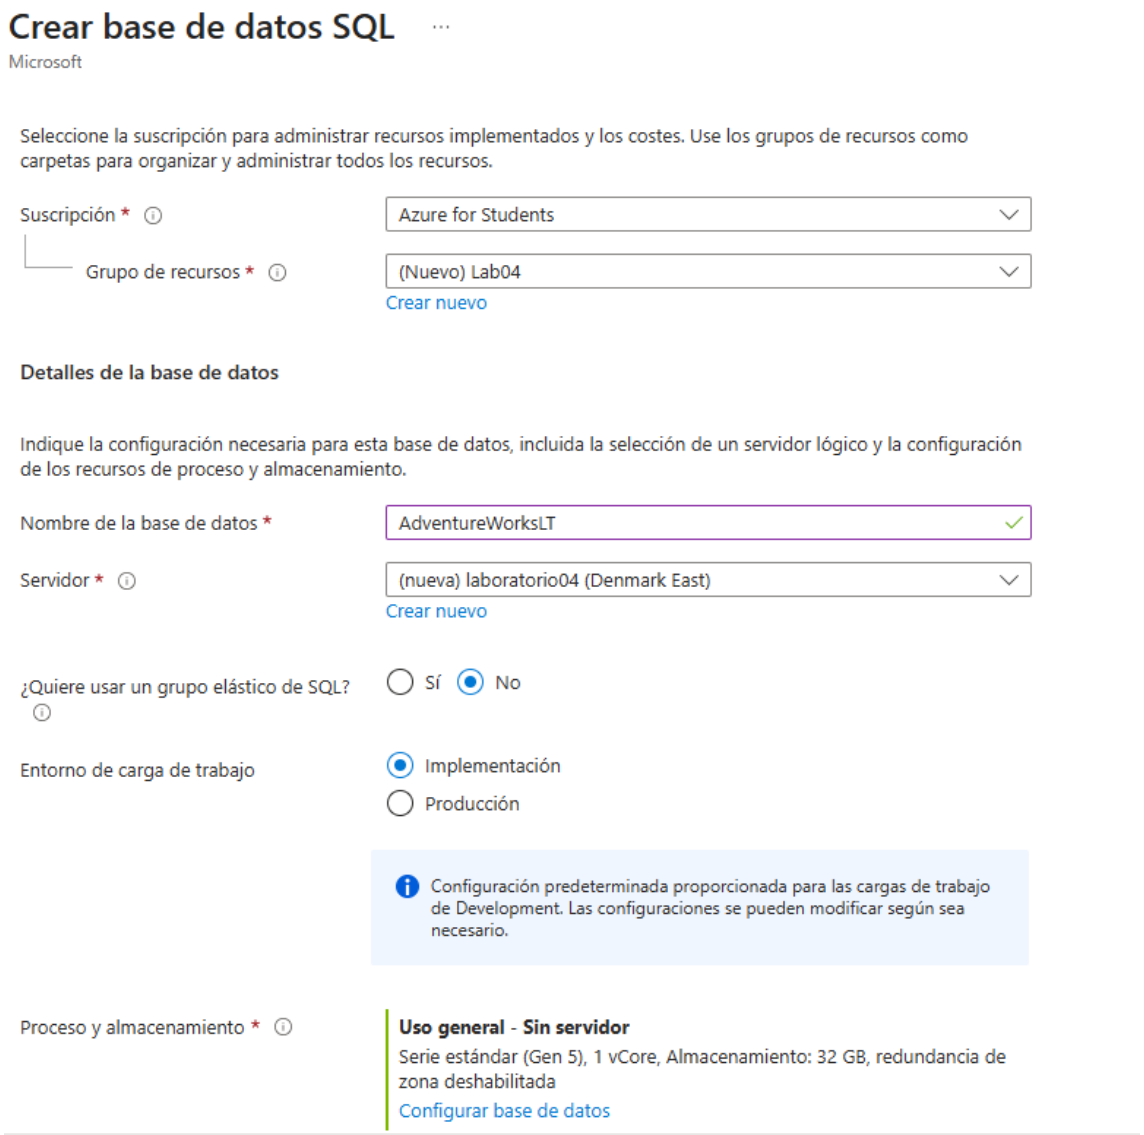

Básico **Redes** Seguridad Configuración adicional Etiquetas Revisar y crear

Configure el acceso y la conectividad de red del servidor. La configuración seleccionada a continuación se aplicará al servidor seleccionado "laboratorio04" y a todas las bases de datos que este administre. Más información

Conectividad de red

Elija una opción para configurar la conectividad con el servidor a través de un punto de conexión público o un punto de conexión privado. Si no se elige ningún acceso, se establecerán los valores predeterminados y podrá configurar el método de conexión después de crear el servidor. Más información

Método de conectividad * ⓘ

- ○ Sin acceso
- ◉ Punto de conexión público
- ○ Punto de conexión privado

Reglas de firewall

Si se establece "Permitir que los servicios y recursos de Azure accedan a este servidor" en "Sí", se permitirán las comunicaciones de todos los recursos del límite de Azure, formen o no parte de su suscripción. Más información
Si se establece "Agregar dirección IP del cliente actual" en "Sí", se agregará una entrada para la dirección IP del cliente al firewall del servidor.

Permitir que los servicios y recursos de Azure accedan a este servidor * [No | Sí]

Agregar dirección IP del cliente actual * [No | Sí]

Directiva de conexión

Crear base de datos SQL ...

Microsoft

Básico Redes Seguridad **Configuración adicional** Etiquetas Revisar y crear

Personalice parámetros de configuración adicionales, incluidos los datos de muestra y la intercalación.

Origen de datos

Empiece con una base de datos vacía, restaure otra a partir de una copia de seguridad, o bien seleccione datos de muestra para rellenar una nueva.

Usar datos existentes * [Ninguno | Copia de seguridad | Muestra]

AdventureWorksLT se creará como base de datos de muestra.


Intercalación de base de datos


La intercalación de la base de datos define las reglas que ordenan y comparan los datos, y no se puede cambiar después de crear la base de datos. La intercalación de la base de datos predeterminada es SQL_Latin1_General_CP1_CI_AS. Más información


Intercalación ⓘ SQL_Latin1_General_CP1_CI_AS

Set up Visual Studio Code with GitHub Copilot

Login en visual studio con github e instalación de las extensiones de github copilot y de sql server

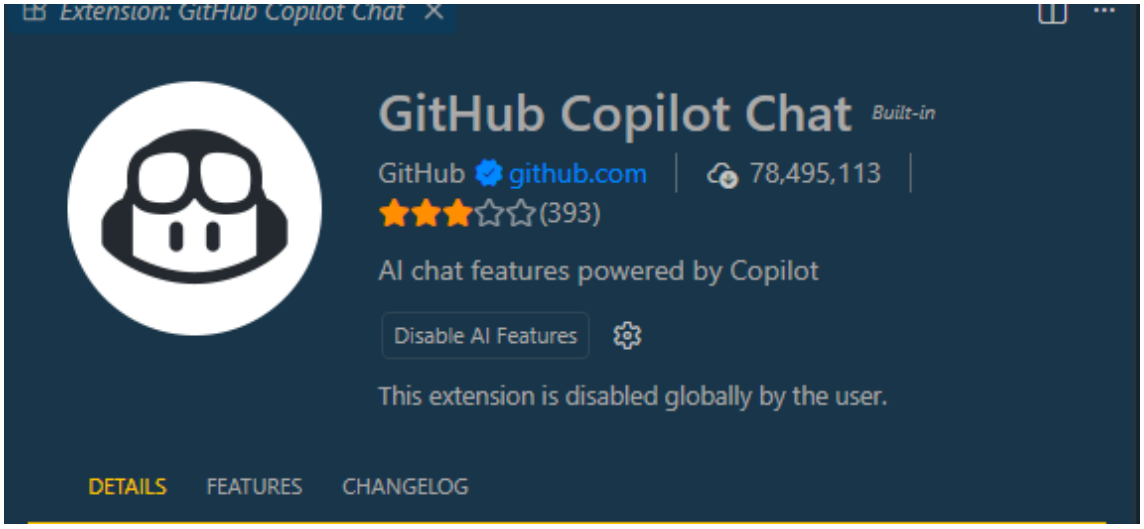


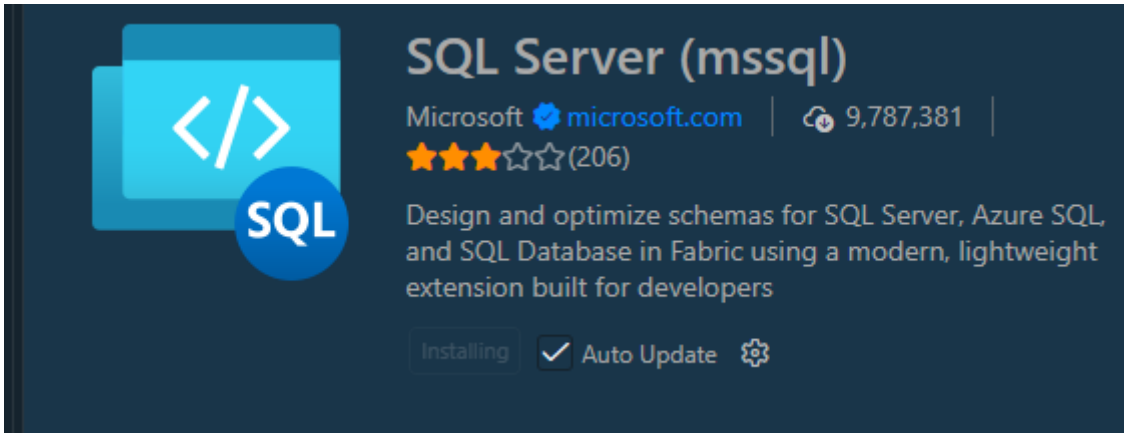


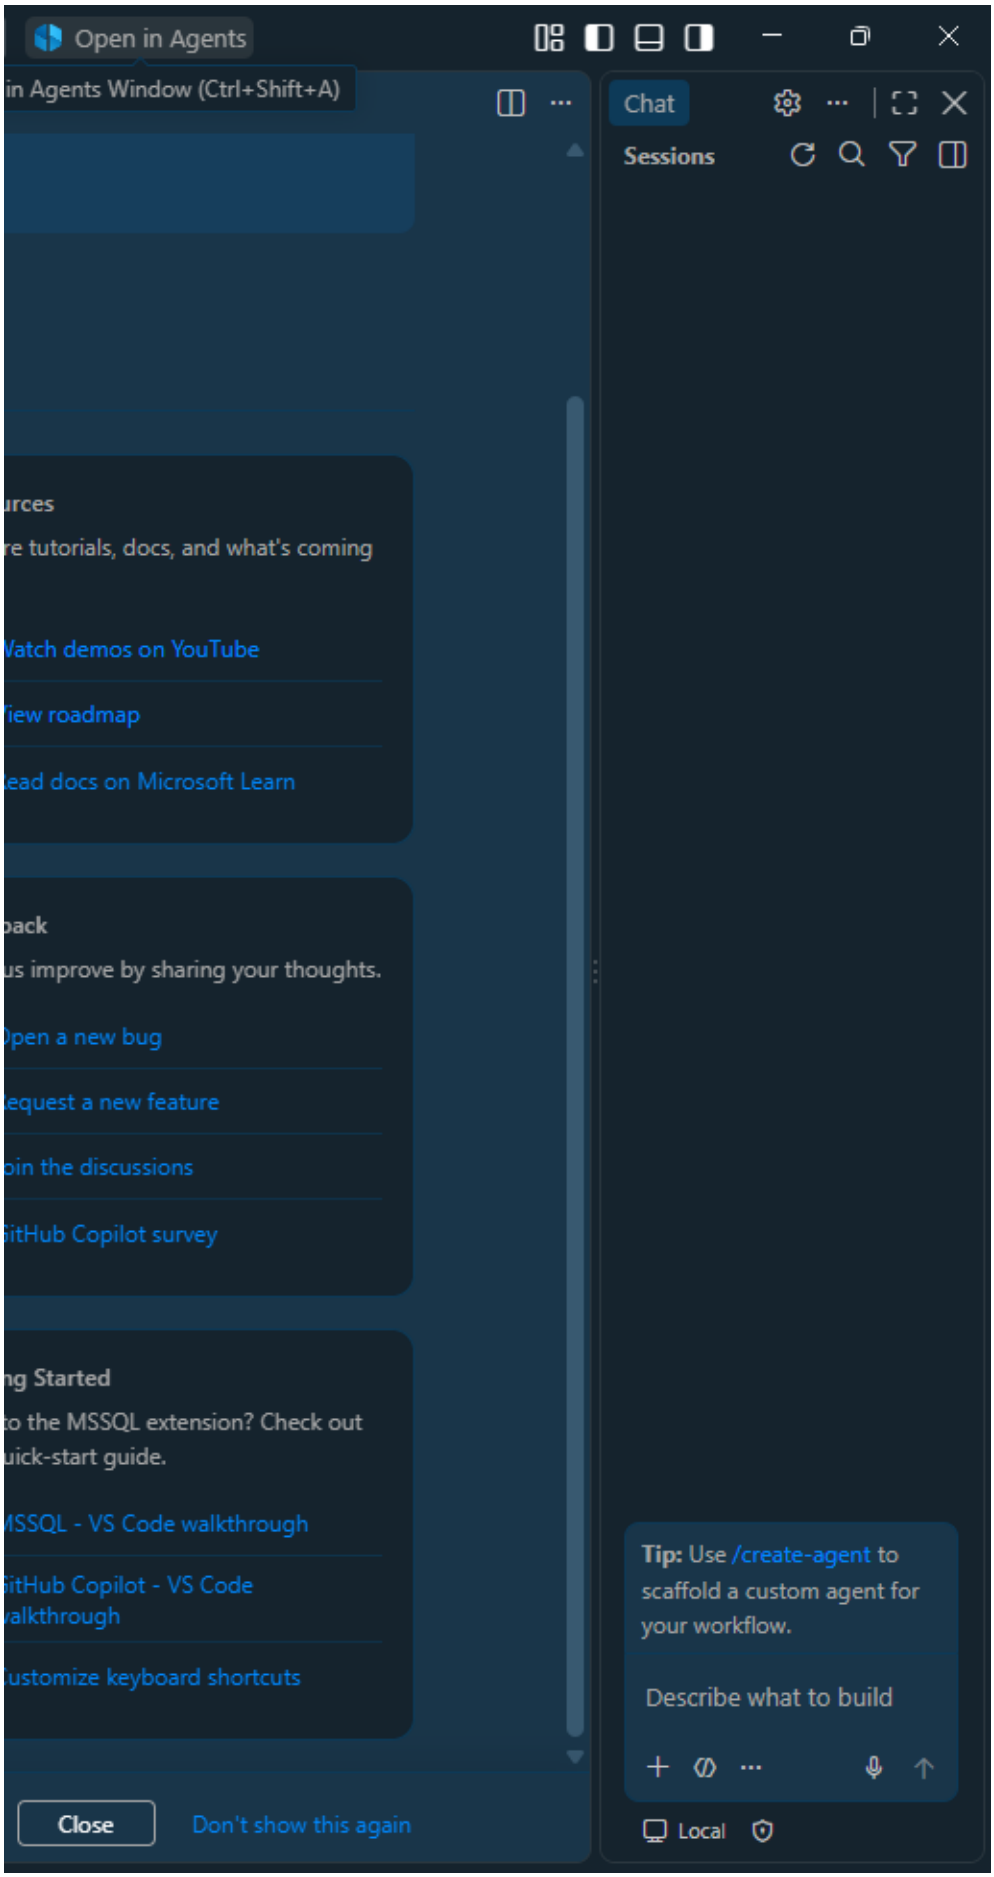
Open in Agents
in Agents Window (Ctrl+Shift+A)
Chat
Sessions
urces
re tutorials, docs, and what's coming
Watch demos on YouTube
iew roadmap
ead docs on Microsoft Learn
pack
us improve by sharing your thoughts.
Open a new bug
equest a new feature
oin the discussions
itHub Copilot survey
ng Started
o the MSSQL extension? Check out
uick-start guide.
MSSQL - VS Code walkthrough
itHub Copilot - VS Code
alkthrough
ustomize keyboard shortcuts
Close
Don't show this again
Tip: Use /create-agent to scaffold a custom agent for your workflow.
Describe what to build
Local

Connect to the Azure SQL Database

Conexión con la ddbb creada en azure

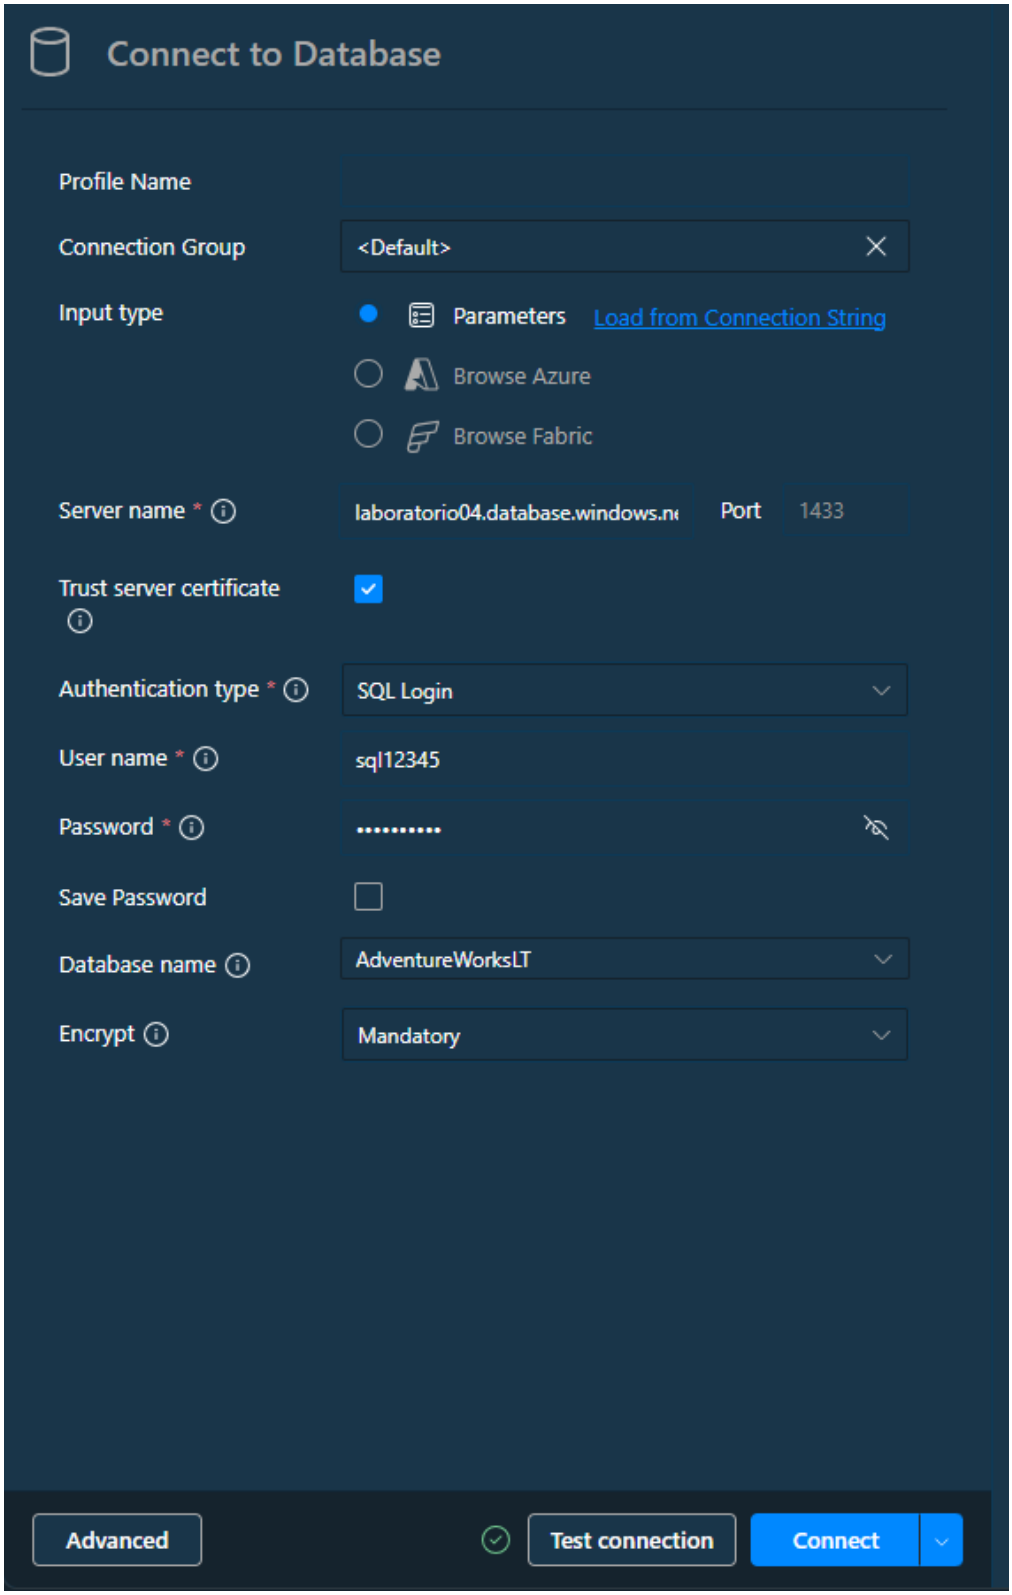


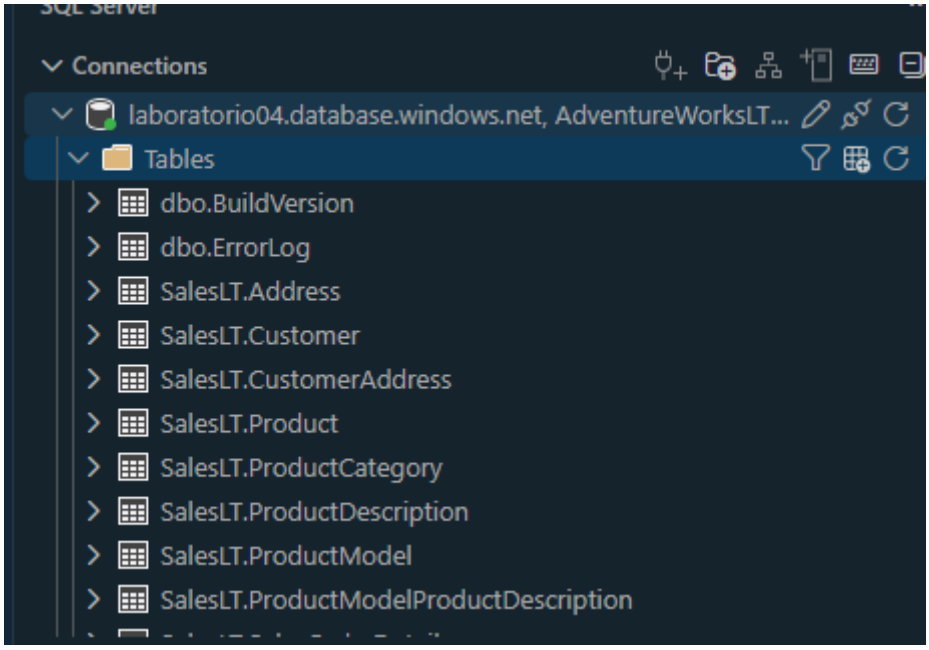

Vista de las tablas


Create a custom instruction file for Copilot


Fichero con instrucciones de funcionamiento para copilot

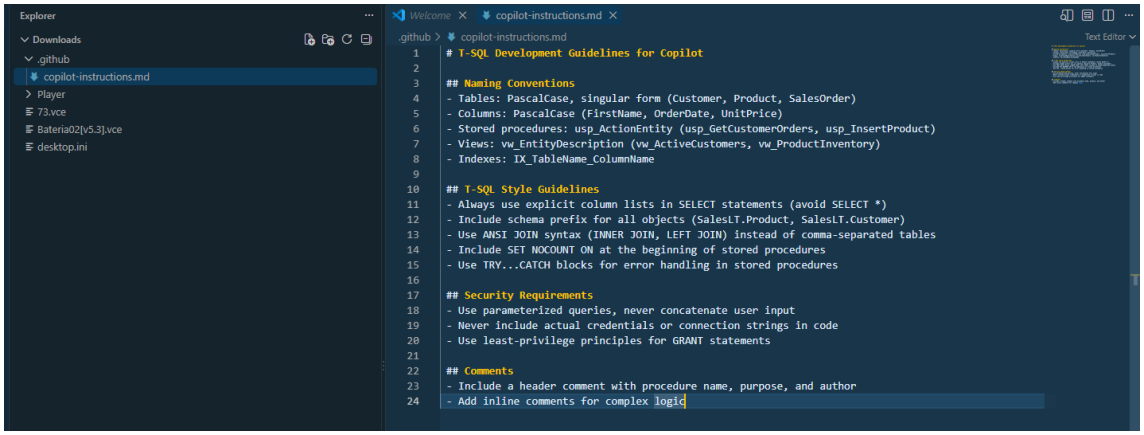

Use Copilot to generate a stored procedure


Creación de un procedure usando el chat de copilot

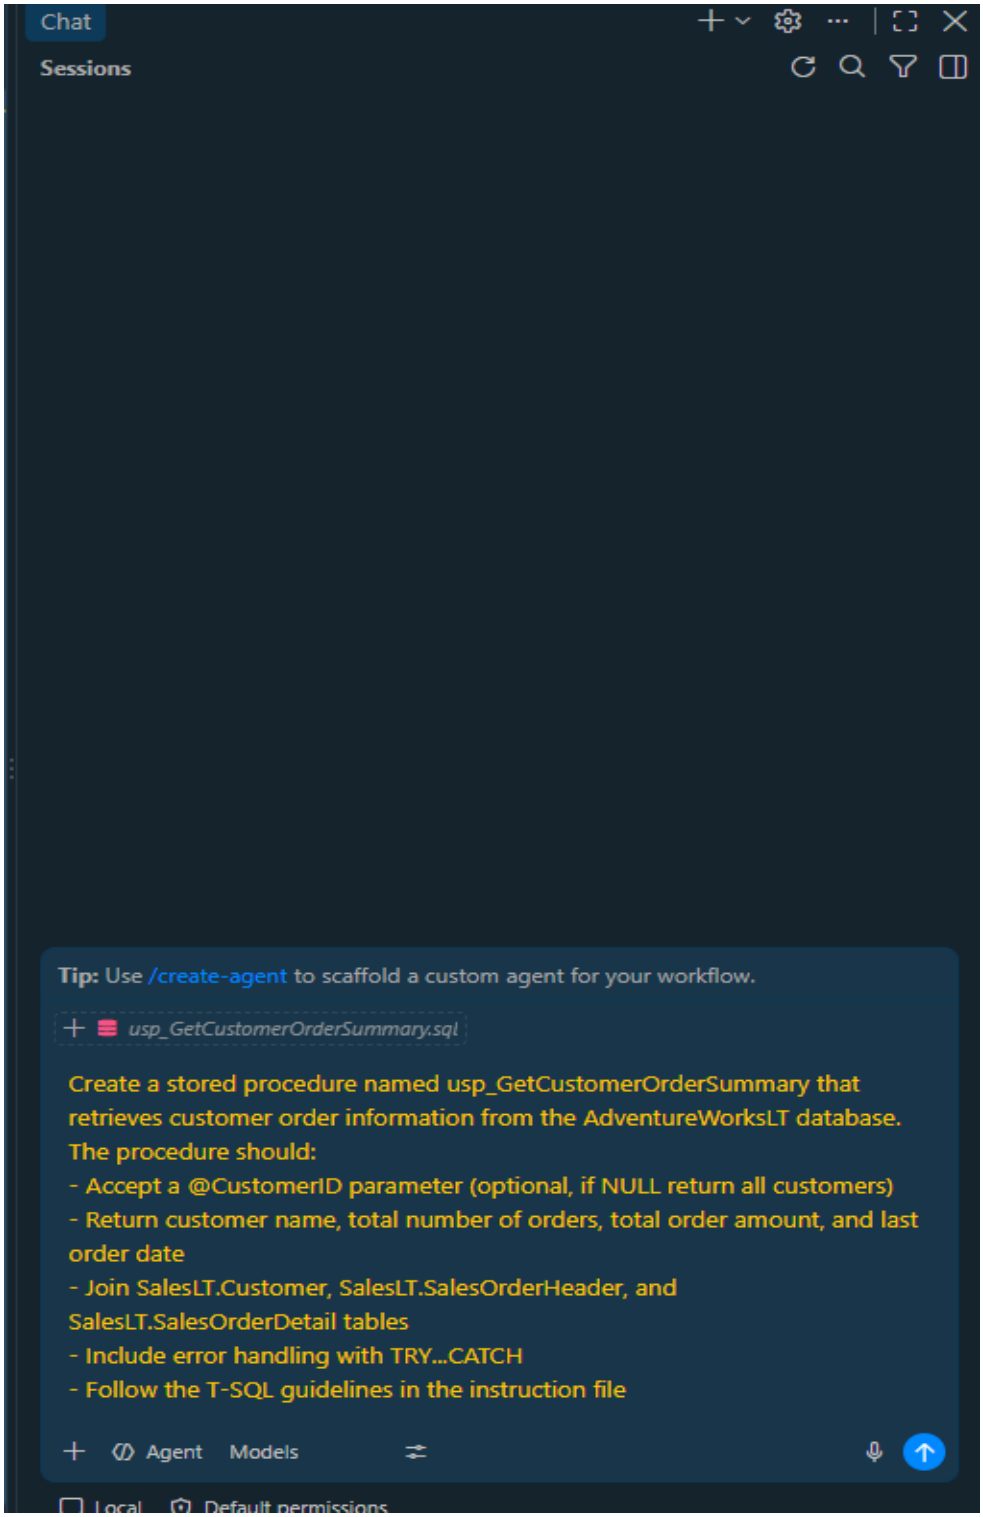


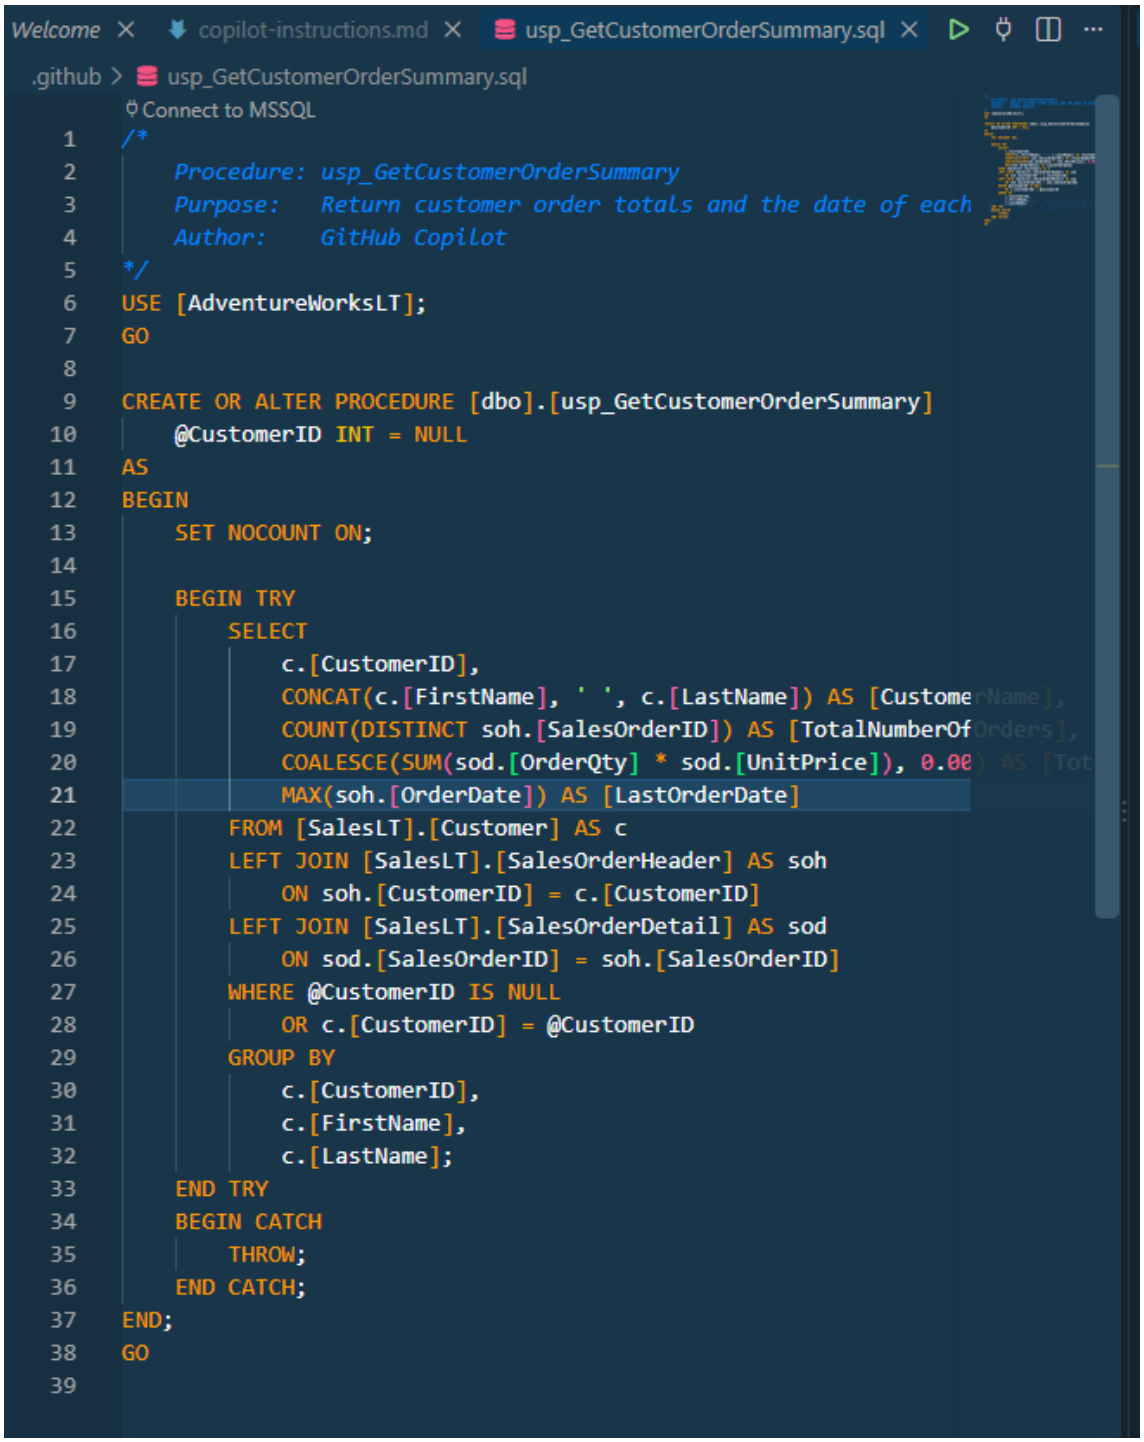
Welcome
copilot-instructions.md
usp_GetCustomerOrderSummary.sql
.github > usp_GetCustomerOrderSummary.sql
Connect to MSSQL
/*
Procedure: usp_GetCustomerOrderSummary
Purpose: Return customer order totals and the date of each
Author: GitHub Copilot
*/
USE [AdventureWorksLT];
GO
CREATE OR ALTER PROCEDURE [dbo].[usp_GetCustomerOrderSummary]
@CustomerID INT = NULL
AS
BEGIN
SET NOCOUNT ON;
BEGIN TRY
SELECT
c.[CustomerID],
CONCAT(c.[FirstName], ' ', c.[LastName]) AS [Custome
COUNT(DISTINCT soh.[SalesOrderID]) AS [TotalNumberOf
COALESCE(SUM(sod.[OrderQty] * sod.[UnitPrice]), 0.00
MAX(soh.[OrderDate]) AS [LastOrderDate]
FROM [SalesLT].[Customer] AS c
LEFT JOIN [SalesLT].[SalesOrderHeader] AS soh
ON soh.[CustomerID] = c.[CustomerID]
LEFT JOIN [SalesLT].[SalesOrderDetail] AS sod
ON sod.[SalesOrderID] = soh.[SalesOrderID]
WHERE @CustomerID IS NULL
OR c.[CustomerID] = @CustomerID
GROUP BY
c.[CustomerID],
c.[FirstName],
c.[LastName];
END TRY
BEGIN CATCH
THROW;
END CATCH;
END;
GO


Use Copilot to generate a view

Usando copilot generar una vista

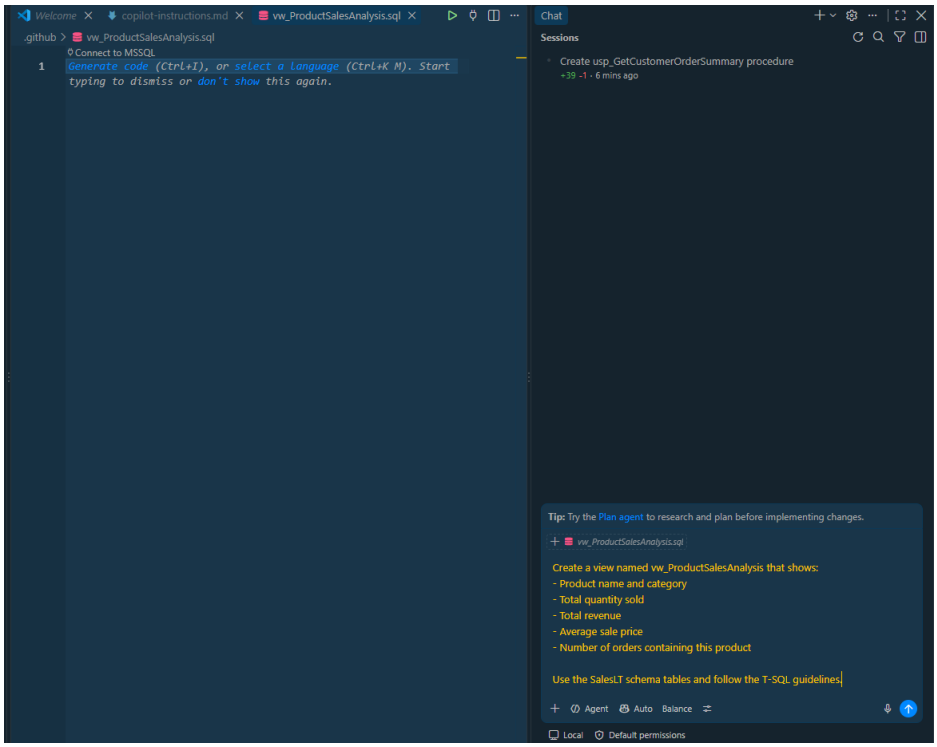

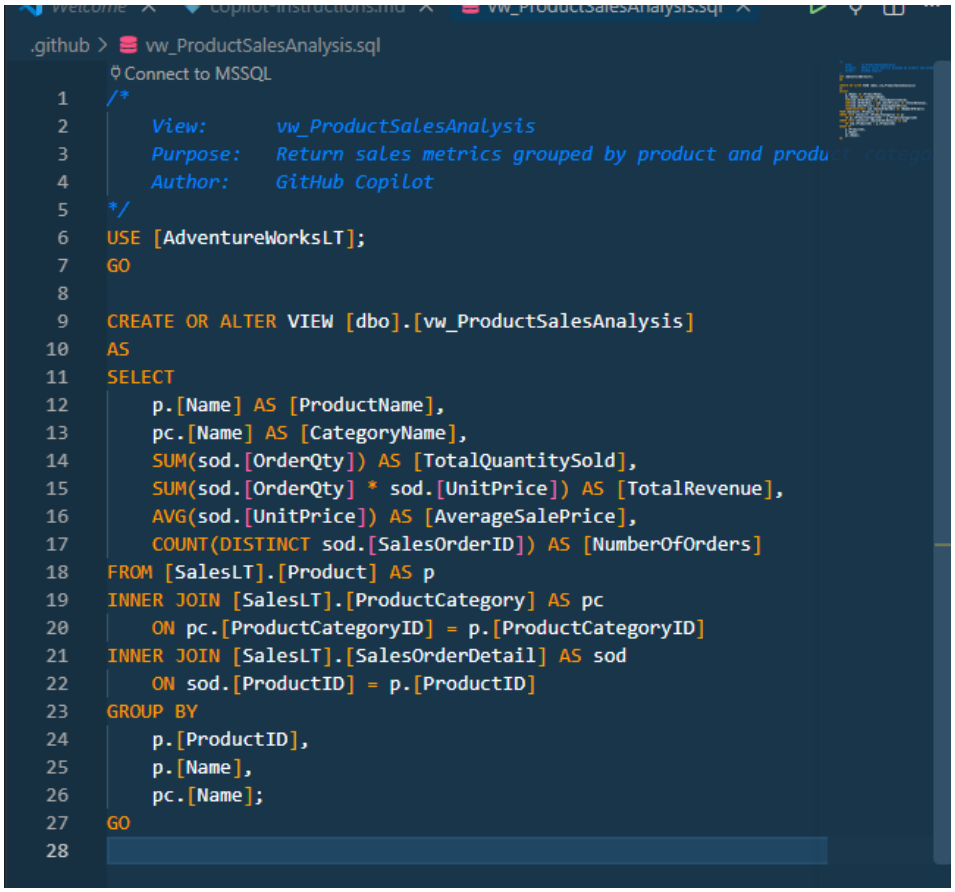

Use Copilot to explain existing code

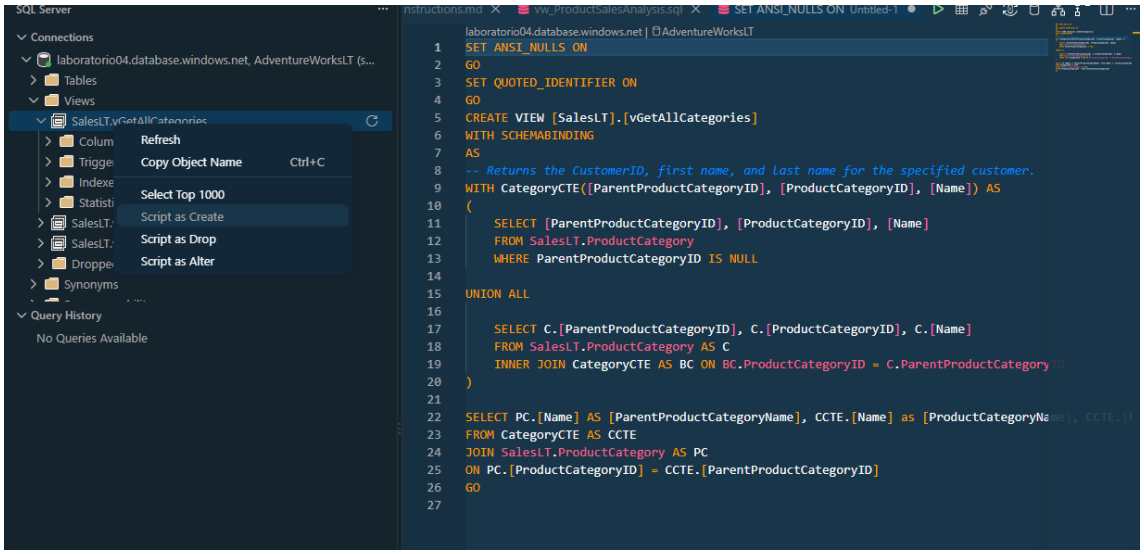

Explain what this view does and how the recursive CTE works

Completed 3 steps in 7s

This view summarizes sales for each product.

- Joins `SalesLT.Product` to `SalesLT.ProductCategory` to get the product and category names.
- Joins `SalesLT.SalesOrderDetail` to find sales for each product.
- `SUM(OrderQty)` calculates total units sold.
- `SUM(OrderQty * UnitPrice)` calculates total revenue.
- `AVG(UnitPrice)` calculates the average sale price.
- `COUNT(DISTINCT SalesOrderID)` counts each order once, even if it contains multiple lines for the product.
- `GROUP BY` produces one result row per product and category.


This view does **not** use a recursive CTE. It is a regular grouped query.


A recursive CTE has two parts:

```
WITH CategoryHierarchy AS
(
    -- Anchor query: starting rows
    SELECT ProductCategoryID, ParentProductC
    FROM SalesLT.ProductCategory
    WHERE ParentProductCategoryID IS NULL

    UNION ALL
```

Use Copilot for query optimization suggestions

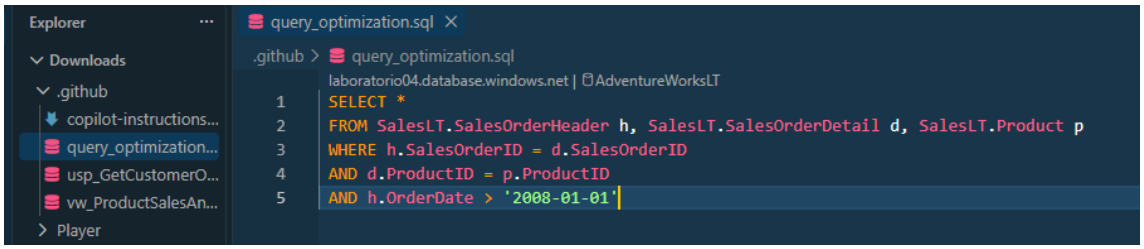

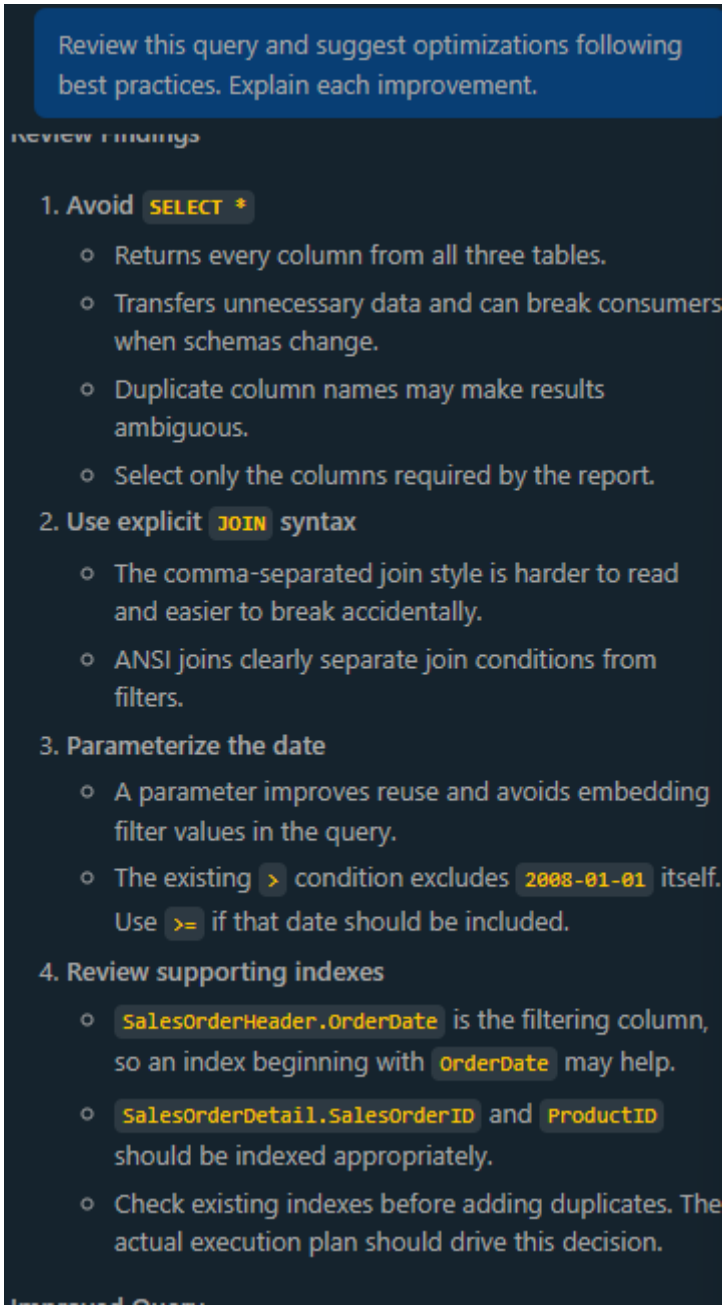

Improved Query

```sql
DECLARE @StartDate DATE = '20080101';


SELECT
    h.[SalesOrderID],
    h.[OrderDate],
    d.[SalesOrderDetailID],
    d.[ProductID],
    d.[OrderQty],
    d.[UnitPrice],
    p.[Name] AS [ProductName]
FROM [SalesLT].[SalesOrderHeader] AS h
INNER JOIN [SalesLT].[SalesOrderDetail] AS d
    ON d.[SalesOrderID] = h.[SalesOrderID]
INNER JOIN [SalesLT].[Product] AS p
    ON p.[ProductID] = d.[ProductID]
WHERE h.[OrderDate] > @StartDate;
```

The date comparison remains **SARGable** because the column is not wrapped in a function, allowing SQL Server to use an index on `OrderDate`.

For a reusable production query, place this logic in a stored procedure and pass `@StartDate` as a parameter rather than declaring it inline. Measure the result with the actual execution plan and `SET STATISTICS IO, TIME ON`; indexes should be added only when those measurements show a bottleneck.

Created 1 todo

Cleanup

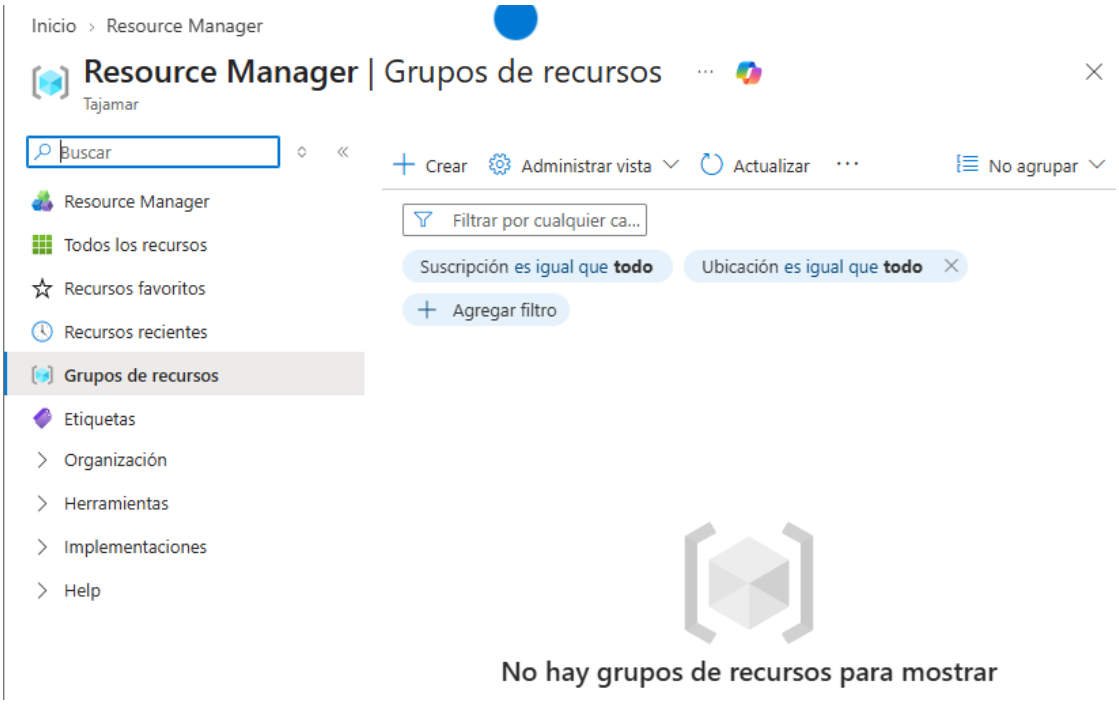
Inicio › Resource Manager
Resource Manager | Grupos de recursos
Tajamar
Buscar
Resource Manager
Todos los recursos
Recursos favoritos
Recursos recientes
Grupos de recursos
Etiquetas
Organización
Herramientas
Implementaciones
Help
Crear
Administrar vista
Actualizar
No agrupar
Filtrar por cualquier ca...
Suscripción es igual que todo
Ubicación es igual que todo
Agregar filtro
No hay grupos de recursos para mostrar