

Homework 6 Report

Isabelle Meredith

2024-10-08


```
dfLeadRaw <- read.csv("../DataRaw/lead-iq-01.csv")</pre>
head(dfLeadRaw)
     Smelter IQ
##
         Far 70
## 1
         Far 85
## 2
## 3
         Far 86
## 4
         Far 76
         Far 96
## 5
         Far 94
## 6
# Data processing takes place here. Surely in the future I won't need to do anything with this
write.csv(dfLeadRaw, "../DataProcessed/lead-iq-cleaned.csv")
\# Read in the processed form of the data instead
dfLead <- read.csv("../DataProcessed/lead-iq-cleaned.csv")</pre>
ggplot(dfLead, aes(IQ, fill = Smelter)) +
   geom_histogram(alpha = 0.6, position = 'identity', binwidth = 5) +
   xlab("Child IQ") +
   guides(fill = guide_legend(title = "Distance to Smelter")) +
   theme(legend.position = "top")
```



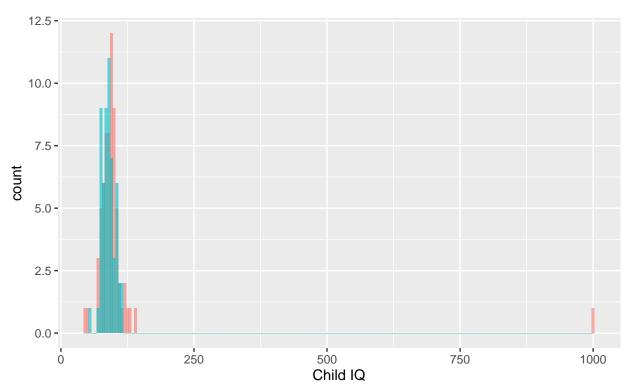

Histogram of IQs comparing children who were near to the smelter with children who were far from the smelter.

```
ggplot(dfLead, aes(x=IQ, y = Smelter, fill = Smelter)) +
geom_boxplot(position = 'identity') +
ylab("Distance to Smelter") +
guides(fill="none")
```

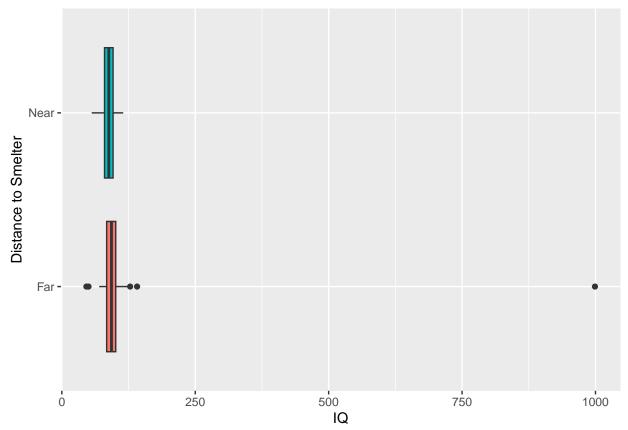

Boxplot of IQs comparing children who were near to the smelter with children who were far from the smelter.

```
dfLeadSummary <- dfLead %>%
  group_by(Smelter) %>%
  rename("Smelter Distance" = Smelter) %>%
  summarise("Mean IQ" = mean(IQ), "IQ SD" = sd(IQ), "Group Count" = n())
kable(dfLeadSummary)
```

| Smelter Distance | Mean IQ | IQ SD | Group Count |
|------------------|-----------|-----------|-------------|
| Far | 106.11940 | 111.87906 | 67 |
| Near | 89.19298 | 12.17497 | 57 |

The mean IQ for close to the smelter is 89.1929825 and the mean IQ far from the smelter is 106.119403. The table contains the values for the group means, standard deviations, and counts for the group near and far from the smelter.