



SI Initialien Buchstaben Kürzel Isabel Schöps geborene Thiel

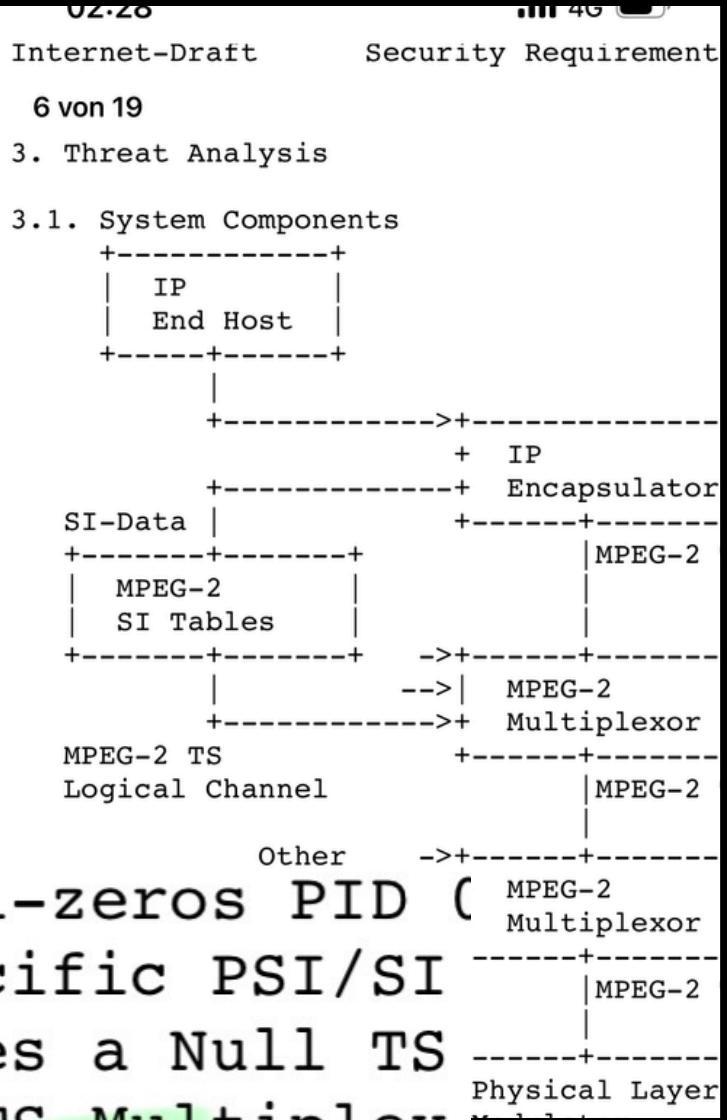

BìP(ÿah¤*Íÿ6ÝàGàoÈñ#hV[ö
Êoïÿkø]ÿ?_)*0C;P(B>àÈ ³8ÿÁ°òBÀýÂ!pö·Êog¤
;ñ¿x(@ØO³BìP.yí¥\ü!Ýò»ää%ÃK.).xiàjÈi-R(

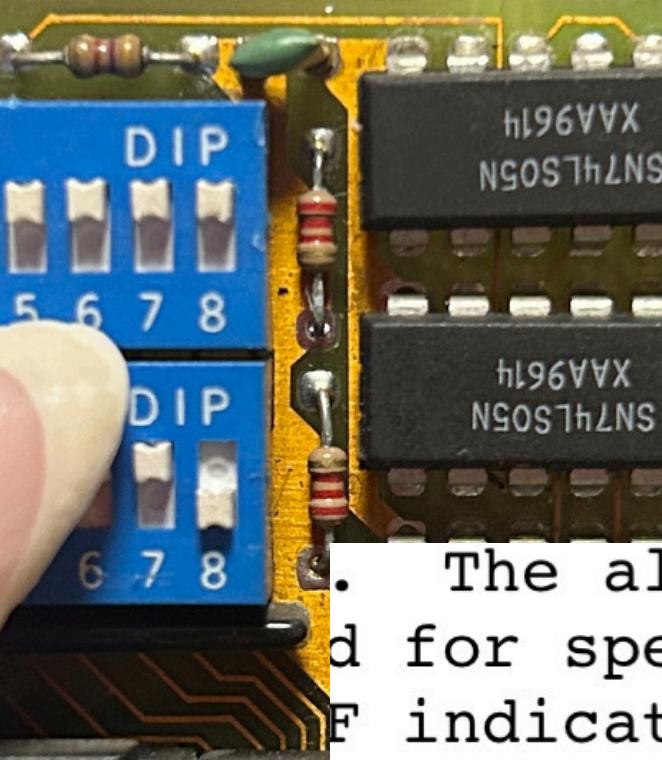

c. The all-zeros PID (0x0000) is used for specific PSI/SI tables. A PID value of 0x0000 indicates a Null TS. The following table shows the PID values used by different TS Multiplexers.



N-based
ization for
Data

mein Geburtstag 16.07.
recommendation 16 July

ion:

<http://www.w3.org/TR/2010/REC-json-ld-20100716/>



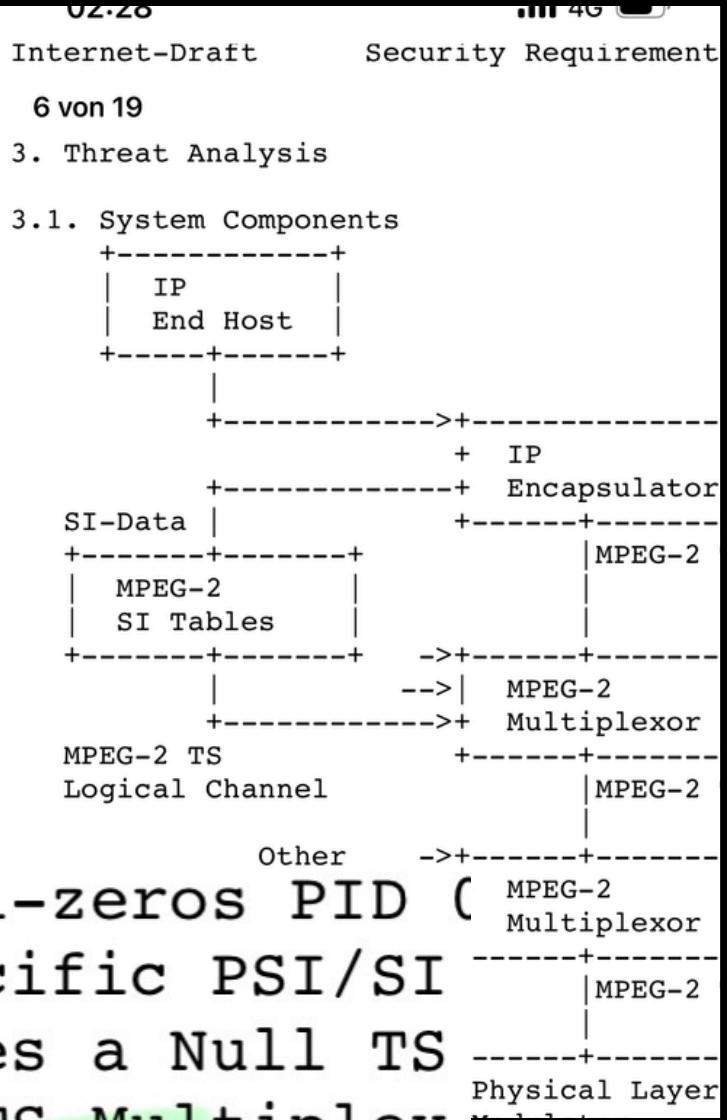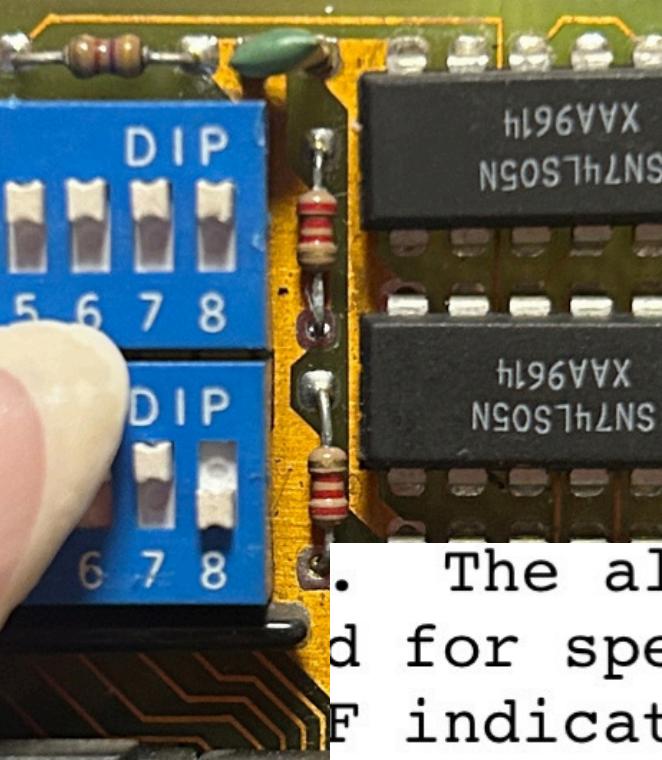

c. The all-zeros PID (0x0000) is used for specific PSI/SI tables. A PID value of 0x0000 indicates a Null TS. The following table shows the PID values used by different TS Multiplexers.

N-based
ization for
Data

mein Geburtstag 16.07.
recommendation 16 July

ion:

<http://www.w3.org/TR/2010/REC-json-ld-20100716/>



