


Work with Production database


When you have restored the production databases locally.

Open the connection string files. The production database names need to match those on the connectionstrings file. In addition, you will need to create a database user (in this case one user) that has the username sagittarius and password sG81Ag!9. Because that is the user specified in the connectionstrings file.

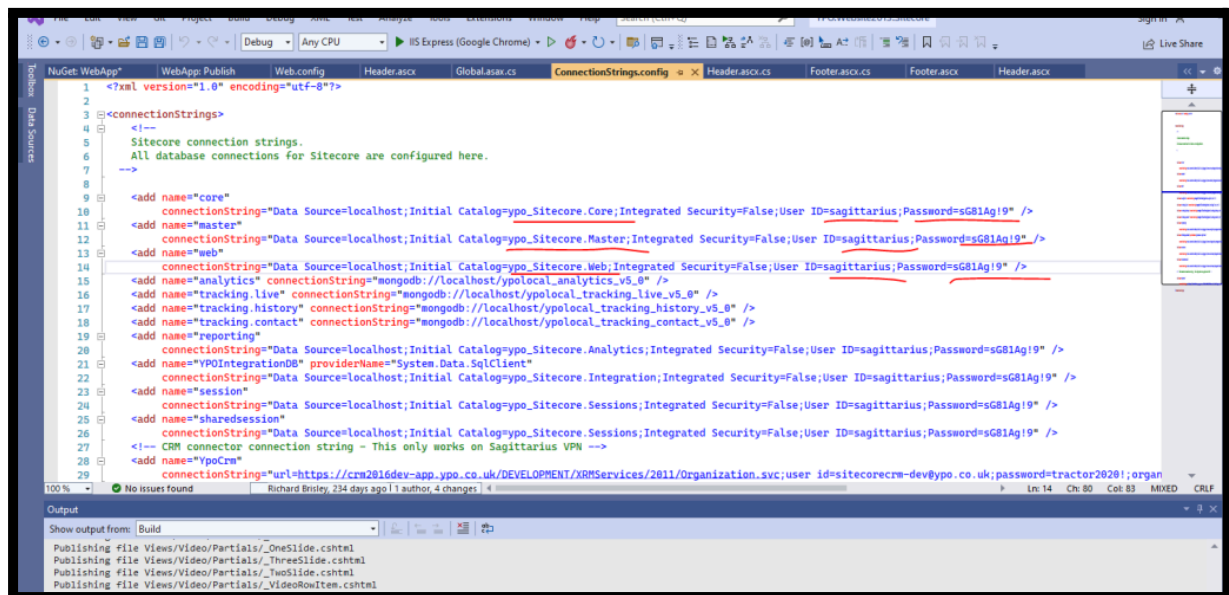



```
<?xml version="1.0" encoding="utf-8"?>
<connectionStrings>
  <!--
  Sitecore connection strings.
  All database connections for Sitecore are configured here.
  -->
  <add name="core"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Core;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="master"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Master;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="web"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Web;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="analytics"
        connectionString="mongodb://localhost/ypplocal_analytics_v5_0" />
  <add name="tracking.live"
        connectionString="mongodb://localhost/ypplocal_tracking_live_v5_0" />
  <add name="tracking.history"
        connectionString="mongodb://localhost/ypplocal_tracking_history_v5_0" />
  <add name="tracking.contact"
        connectionString="mongodb://localhost/ypplocal_tracking_contact_v5_0" />
  <add name="reporting"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Analytics;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="yppIntegrationDB"
        providerName="System.Data.SqlClient"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Integration;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="session"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Sessions;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <add name="sharedsession"
        connectionString="Data Source=localhost;Initial Catalog=ypp.Sitecore.Sessions;Integrated Security=False;User ID=sagittarius;Password=sG81Ag!9" />
  <!-- CRM connector connection string - This only works on Sagittarius VPN -->
  <add name="yppCRM"
        connectionString="url=https://crm2016dev-app.ypp.co.uk/DEVELOPMENT/XRMServices/2011/Organization.svc;user id=sitecorecrm-dev@ypp.co.uk;password=tractor2020!;organ
```

Create the user under Security folder

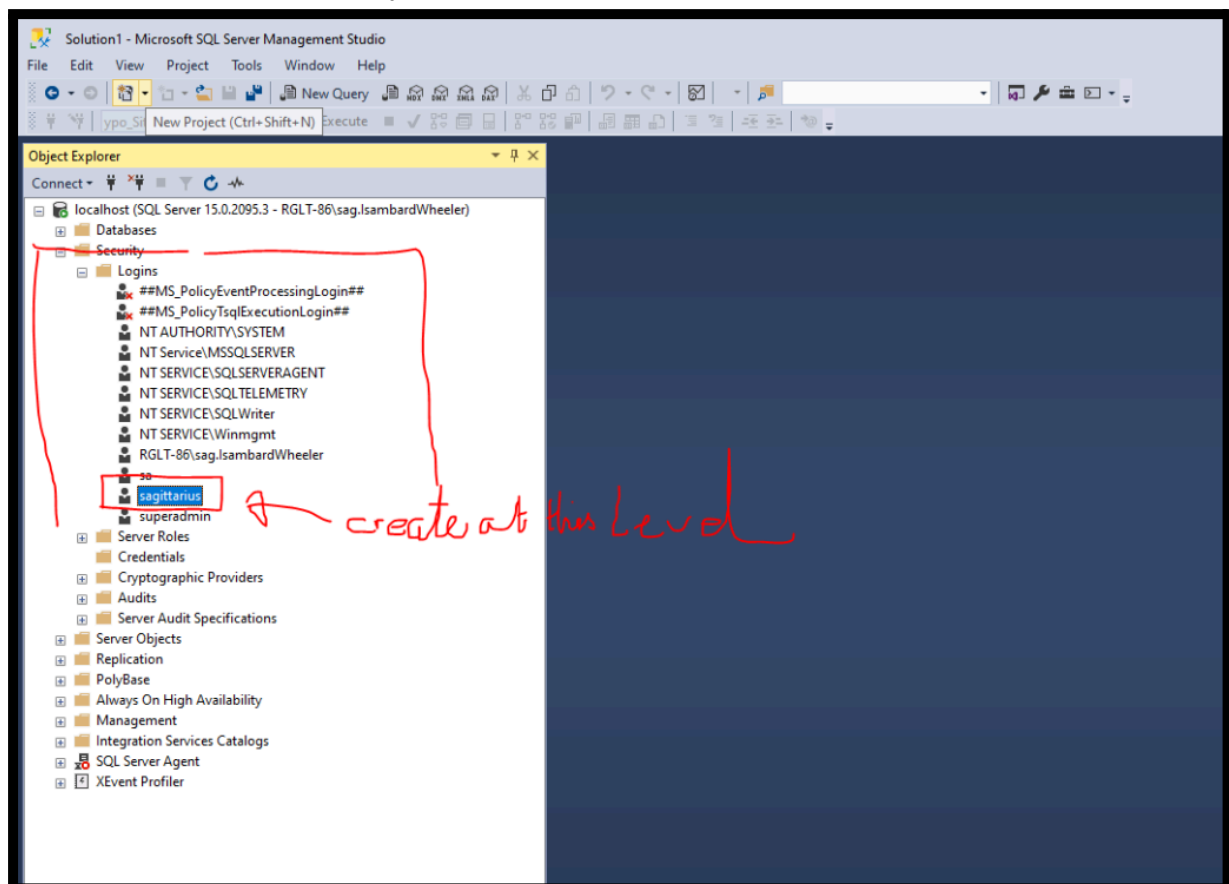

When you create User give sysadmin permissions.

Public permissions will be selected by default.

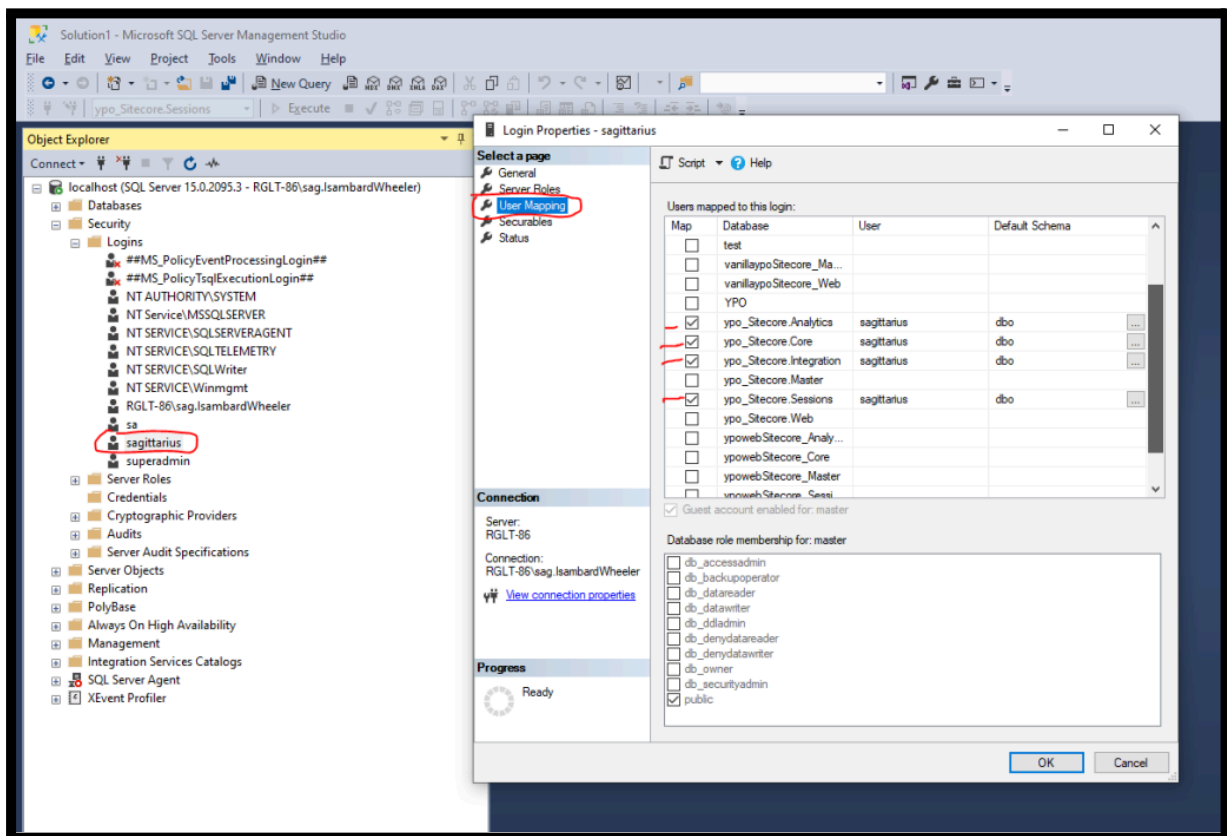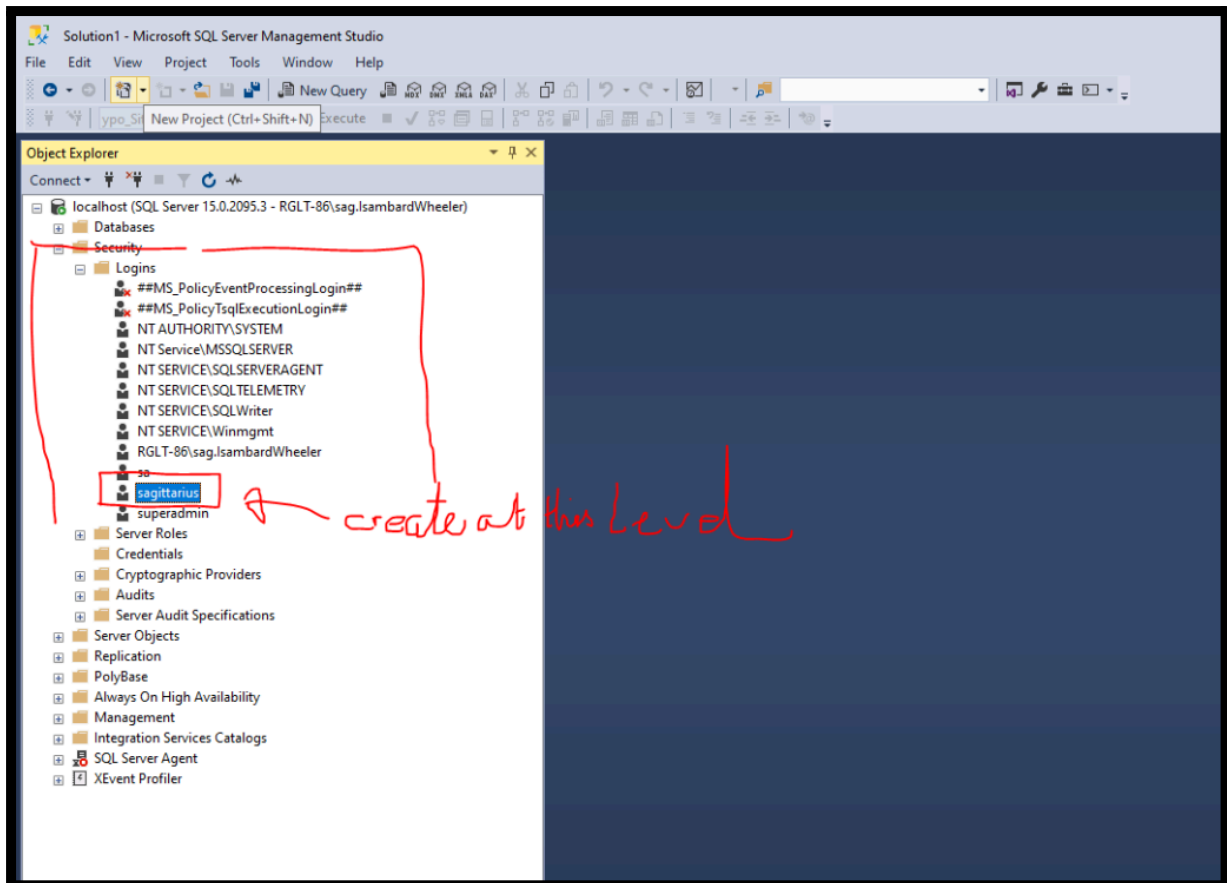

Error 5 Below

In the user Mapping section connect the user to the databases that it should interact with. These should be the same databases as specified in the connectionstrings file. I did not map the user I created to ypo_Sitecore.Master because the user sagittarius had been created locally to that Database (when I imported). This means that when I imported the ypo_Sitecore.Master database, it also imported the user associated with that database. In which case the users that were associated with the database.

