

Comparison: Michigan Imputation Server / Shapeit+Minimac3 (Chromosome 7)

Ignacio Tolosana

Imputation

```
## Loading required package: BiocGenerics

## Loading required package: parallel

##
## Attaching package: 'BiocGenerics'

## The following objects are masked from 'package:parallel':
##
##   clusterApply, clusterApplyLB, clusterCall, clusterEvalQ,
##   clusterExport, clusterMap, parApply, parCapply, parLapply,
##   parLapplyLB, parRapply, parSapply, parSapplyLB

## The following objects are masked from 'package:stats':
##
##   IQR, mad, sd, var, xtabs

## The following objects are masked from 'package:base':
##
##   anyDuplicated, append, as.data.frame, basename, cbind,
##   colMeans, colnames, colSums, dirname, do.call, duplicated,
##   eval, evalq, Filter, Find, get, grep, grepl, intersect,
##   is.unsorted, lapply, lengths, Map, mapply, match, mget, order,
##   paste, pmax, pmax.int, pmin, pmin.int, Position, rank, rbind,
##   Reduce, rowMeans, rownames, rowSums, sapply, setdiff, sort,
##   table, tapply, union, unique, unsplit, which, which.max,
##   which.min

## Loading required package: GenomeInfoDb

## Loading required package: S4Vectors

## Loading required package: stats4

##
## Attaching package: 'S4Vectors'

## The following object is masked from 'package:base':
##
##   expand.grid
```

```

## Loading required package: IRanges

## Loading required package: GenomicRanges

## Loading required package: SummarizedExperiment

## Loading required package: Biobase

## Welcome to Bioconductor
##
##     Vignettes contain introductory material; view with
##     'browseVignettes()'. To cite Bioconductor, see
##     'citation("Biobase)", and for packages 'citation("pkgname)".

## Loading required package: DelayedArray

## Loading required package: matrixStats

##
## Attaching package: 'matrixStats'

## The following objects are masked from 'package:Biobase':
##
##     anyMissing, rowMedians

## Loading required package: BiocParallel

##
## Attaching package: 'DelayedArray'

## The following objects are masked from 'package:matrixStats':
##
##     colMaxs, colMins, colRanges, rowMaxs, rowMins, rowRanges

## The following objects are masked from 'package:base':
##
##     aperm, apply

## Loading required package: Rsamtools

## Loading required package: Biostrings

## Loading required package: XVector

##
## Attaching package: 'Biostrings'

## The following object is masked from 'package:DelayedArray':
##
##     type

```

```
## The following object is masked from 'package:base':
##
##      strsplit

##
## Attaching package: 'VariantAnnotation'

## The following object is masked from 'package:base':
##
##      tabulate

## Loading required package: survival

## Loading required package: Matrix

##
## Attaching package: 'Matrix'

## The following object is masked from 'package:VariantAnnotation':
##
##      expand

## The following object is masked from 'package:S4Vectors':
##
##      expand

## Loading required package: magrittr
```

Imputed data exploration

```
michigan_chr7
```

```
## class: CollapsedVCF
## dim: 192 2275
## rowRanges(vcf):
##   GRanges with 5 metadata columns: paramRangeID, REF, ALT, QUAL, FILTER
## info(vcf):
##   DataFrame with 4 columns: AF, MAF, R2, ER2
## info(header(vcf)):
##       Number Type  Description
##   AF  1      Float Estimated Alternate Allele Frequency
##   MAF 1      Float Estimated Minor Allele Frequency
##   R2  1      Float Estimated Imputation Accuracy
##   ER2 1      Float Empirical (Leave-One-Out) R-square (available only ...
## geno(vcf):
##   SimpleList of length 3: GT, DS, GP
## geno(header(vcf)):
##       Number Type  Description
##   GT  1      String Genotype
##   DS  1      Float  Estimated Alternate Allele Dosage : [P(0/1)+2*P(1/1)]
##   GP  3      Float  Estimated Posterior Probabilities for Genotypes 0/0...
```


```
minimac_chr7
```

```
## class: CollapsedVCF
## dim: 223 2275
## rowRanges(vcf):
##   GRanges with 5 metadata columns: paramRangeID, REF, ALT, QUAL, FILTER
## info(vcf):
##   DataFrame with 4 columns: AF, MAF, R2, ER2
## info(header(vcf)):
##       Number Type  Description
##   AF  1      Float Estimated Alternate Allele Frequency
##   MAF 1      Float Estimated Minor Allele Frequency
##   R2  1      Float Estimated Imputation Accuracy
##   ER2 1      Float Empirical (Leave-One-Out) R-square (available only ...
## geno(vcf):
##   SimpleList of length 3: GT, DS, GP
## geno(header(vcf)):
##       Number Type  Description
##   GT  1      String Genotype
##   DS  1      Float  Estimated Alternate Allele Dosage : [P(0/1)+2*P(1/1)]
##   GP  3      Float  Estimated Posterior Probabilities for Genotypes 0/0...
```


DS values

```
# Distribution of the DS values in each imputation
par(mfrow=c(1,2))
HIST_MICHIGAN <- hist(DS_michigan, breaks=seq(0, 2, by=0.05),
                      main="Michigan Imputation Server", xlab="DS values")
HIST_MINIMAC <- hist(DS_minimac, breaks=seq(0, 2, by=0.05),
                      main="Minimac3", xlab="DS values")
```

Michigan Imputation Server

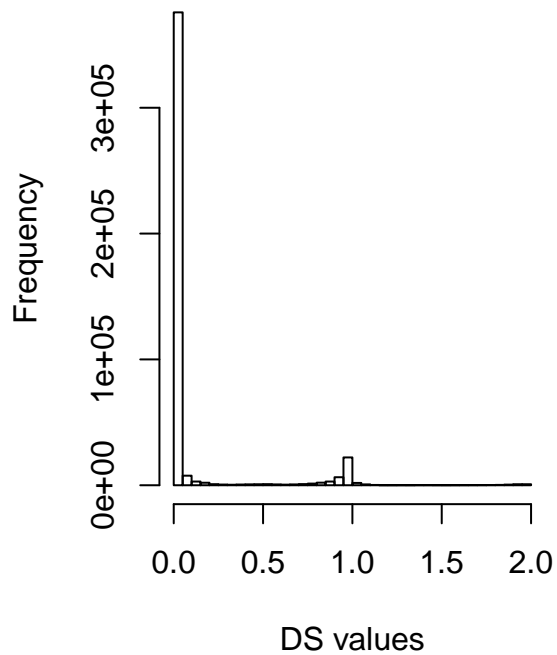

Minimac3

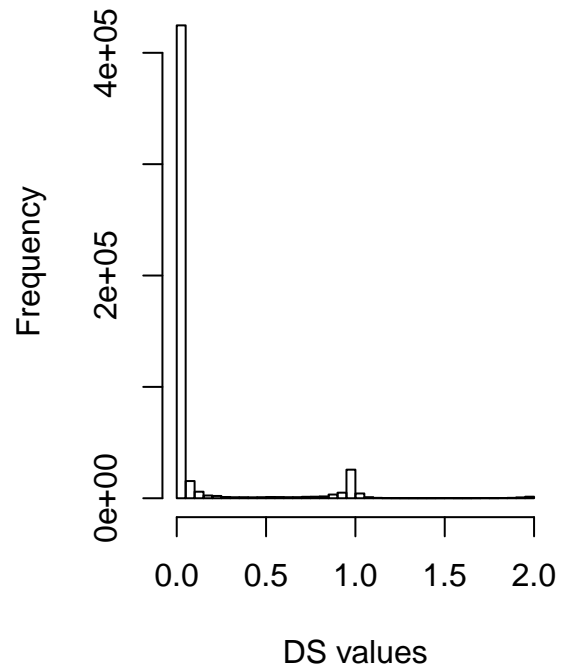

```
# DS correlation by individuals  
min(cor_by_ind)
```

```
## [1] 0.4930321
```

```
max(cor_by_ind)
```

```
## [1] 0.9999955
```

```
mean(cor_by_ind)
```

```
## [1] 0.9857534
```


```
mean(cor_by_ind > 0.95)
```

```
## [1] 0.9358242
```

```
mean(cor_by_ind > 0.99)
```

```
## [1] 0.7578022
```


```
# Histogram of the DS correlation values by individuals
par(mfrow=c(1,1))
CORR_HIST <- hist(cor_by_ind, breaks=seq(0.48, 1, by=0.01),
                  main="DS correlation values by individuals", xlab="DS correlation")
```

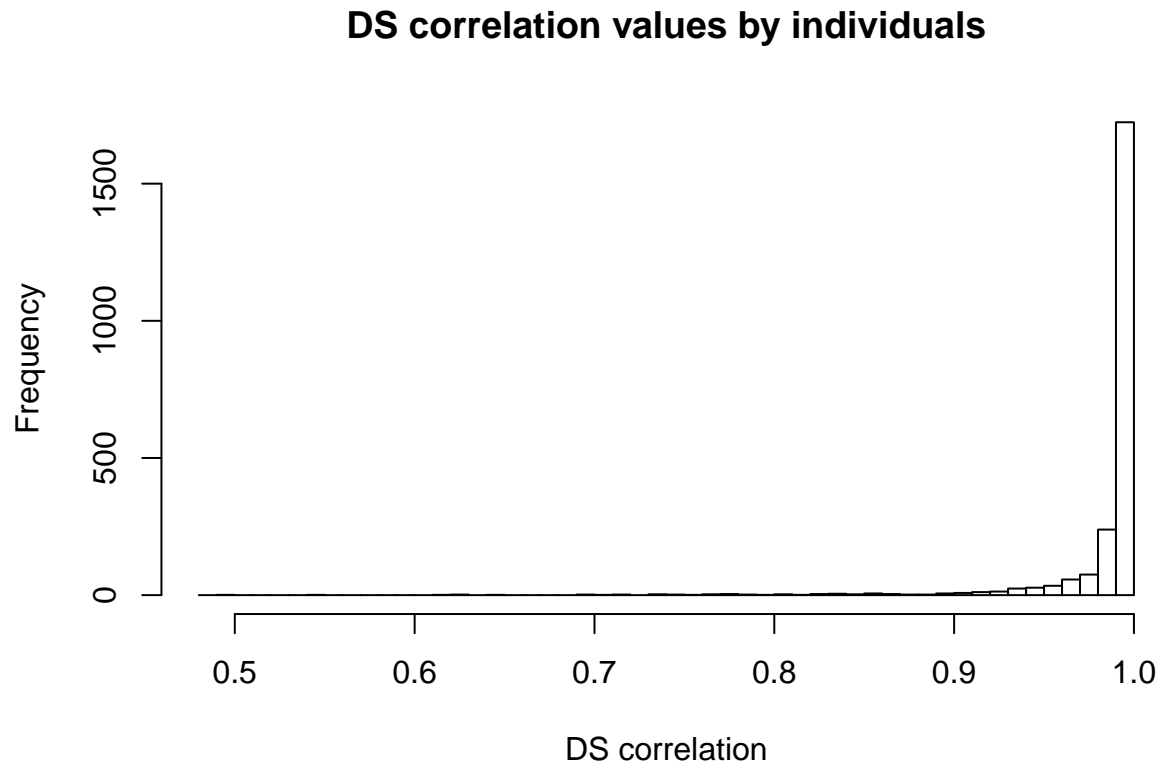


R²

Density and histogram plots comparing the RS2 values in both methods (“ismich = TRUE” indicates the values for the Michigan imputation, whereas “ismich = FALSE” shows the values for the Minimac imputation)

```
ggdensity(comparison, x = "rsq",
          add = "mean", rug = TRUE,
          color = "ismich", fill = "ismich",
          palette = c("#E7B800", "#00AFBB"),
          legend.title = c(""),
          xlab = ("Imputation R2"),
          ylab = ("Density"))
```

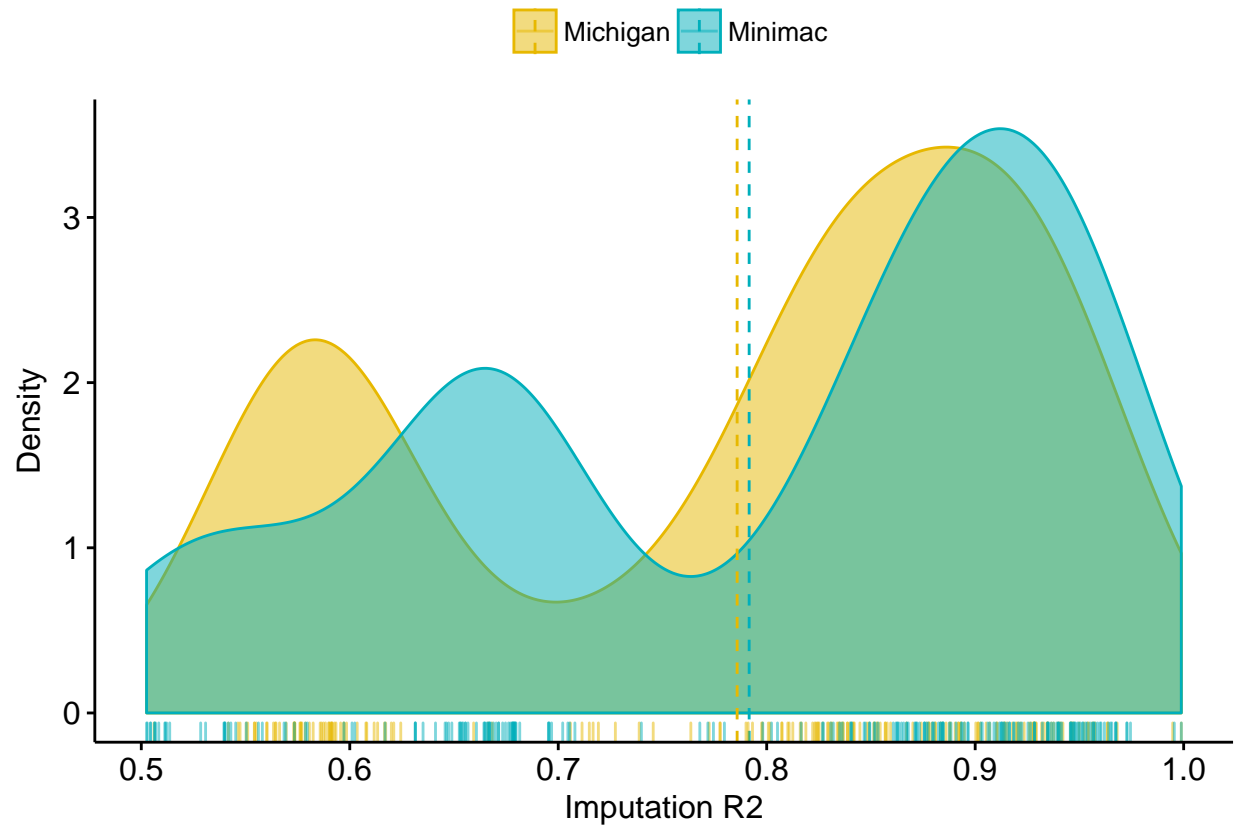

```
par(mfrow=c(1,2))
HIST_R2_MICHIGAN <- hist(info(michigan_chr7)$R2, breaks=seq(0.5, 1, by=0.02),
  main="Michigan", xlab="Imputation R2")
HIST_R2_MINIMAC <- hist(info(michigan_chr7)$R2, breaks=seq(0.5, 1, by=0.02),
  main="Minimac", xlab="Imputation R2")
```

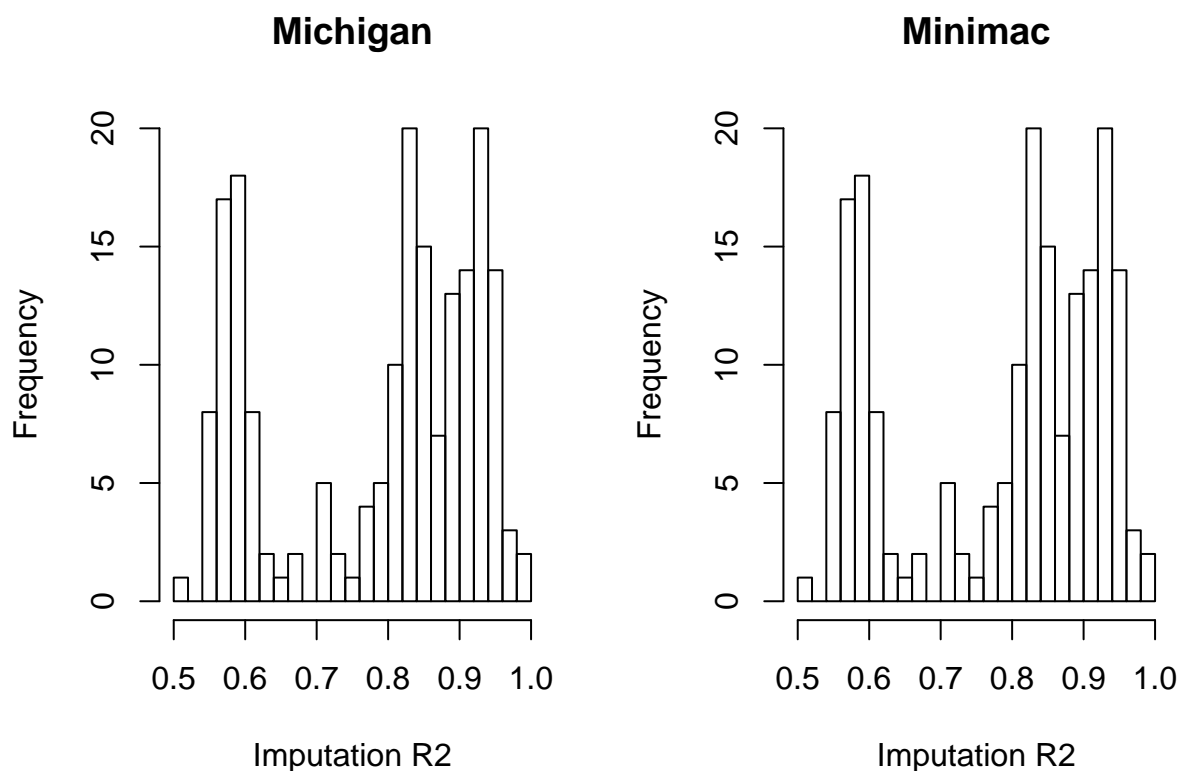

Genotype predictions

```
## non-single nucleotide variations are set to NA
## non-single nucleotide variations are set to NA
```

Compare the genotype predictions (BestGuess) with each method by individuals. “perc_by_ind” is the % of SNPs by individual predicted equally in both methods

```
min(perc_by_ind)
```

```
## [1] 0.7864583
```

```
max(perc_by_ind)
```

```
## [1] 1
```

```
mean(perc_by_ind)
```

```
## [1] 0.9972436
```



```
mean(perc_by_ind > 0.95)
```


```
## [1] 0.9863736
```

```
mean(perc_by_ind > 0.99)
```

```
## [1] 0.952967
```

```
# Plot histogram of the genotypes equally predicted (BestGuess) by individuals  
# in both methods  
par(mfrow=c(1,1))  
GENO_HIST <- hist(perc_by_ind, breaks=seq(0.7, 1, by=0.01),  
                  main="SNPs (genotypes) equally predicted with Michigan and Minimac3",  
                  xlab="% of equally predicted genotypes")
```

SNPs (genotypes) equally predicted with Michigan and Minimac3

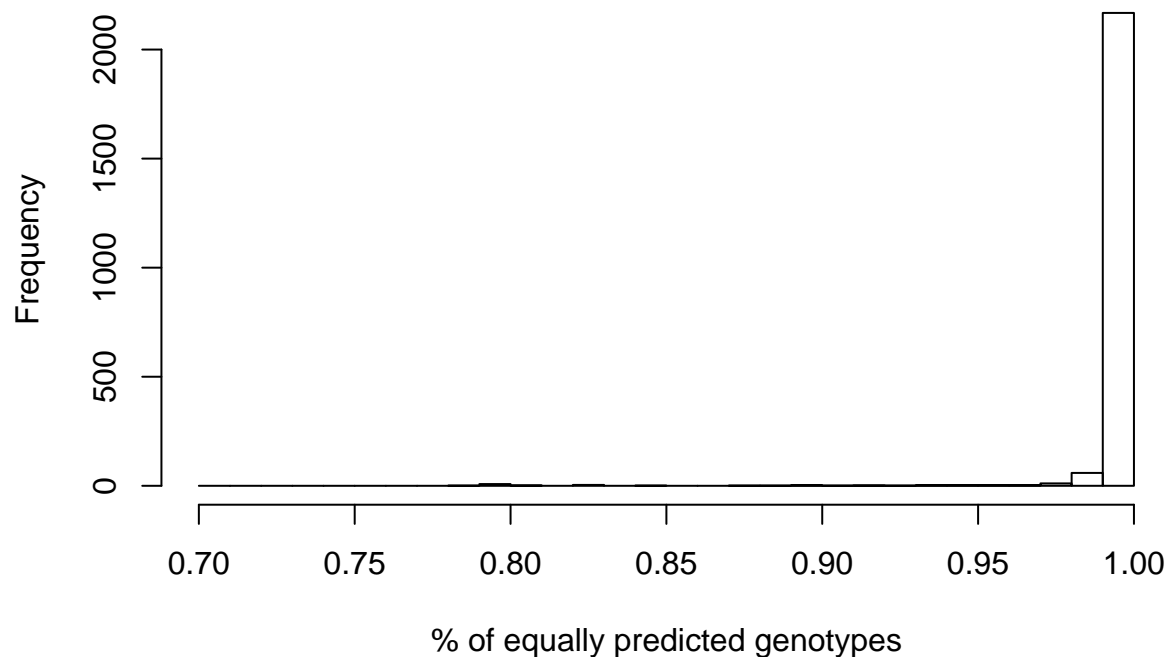

Inversion prediction

Predicted inversions with scoreInvHap

```
michigan_inv_chr7
```

```
## scoreInvHapRes
## Samples: 2275
## Genotypes' table:
## IaIa IaIb IbIb NaIa NaIb NaNa NaNb NbIa NbIb NbNb
## 89 5 367 631 0 1036 0 21 123 3
## - Inversion genotypes' table:
## NN NI II
## 1039 775 461
## - Inversion frequency: 37.30%
```

```
minimac_inv_chr7
```

```
## scoreInvHapRes
## Samples: 2275
## Genotypes' table:
## IaIa IaIb IbIb NaIa NaIb NaNa NaNb NbIa NbIb NbNb
## 89 70 433 565 0 970 2 21 118 7
## - Inversion genotypes' table:
## NN NI II
## 979 704 592
## - Inversion frequency: 41.49%
```

```
# Comparison table
```

```
scoreinvhap_table
```

```
##          Minimac
## Michigan IaIa IaIb IbIb NaIa NaIb NaNa NaNb NbIa NbIb NbNb
## IaIa 89 0 0 0 0 0 0 0 0 0 0
## IaIb 0 4 0 1 0 0 0 0 0 0 0
## IbIb 0 0 344 0 0 23 0 0 0 0 0
## NaIa 0 66 1 564 0 0 0 0 0 0 0
## NaIb 0 0 0 0 0 0 0 0 0 0 0
## NaNa 0 0 88 0 0 947 1 0 0 0 0
## NaNb 0 0 0 0 0 0 0 0 0 0 0
## NbIa 0 0 0 0 0 0 0 0 21 0 0
## NbIb 0 0 0 0 0 0 0 1 0 115 7
## NbNb 0 0 0 0 0 0 0 0 0 3 0
```

```
sum(diag(scoreinvhap_table))/sum(scoreinvhap_table)
```


```
## [1] 0.916044
```

```
# Comparison of the results for both imputation methods
```

```
par(mfrow=c(1,2))
```

```
hist(maxscores(michigan_inv_chr7), breaks=seq(0, 1, by=0.05), main="Michigan", xlab="Maxscores")
```

```
hist(maxscores(minimac_inv_chr7), breaks=seq(0, 1, by=0.05), main="Minimac", xlab="Maxscores")
```

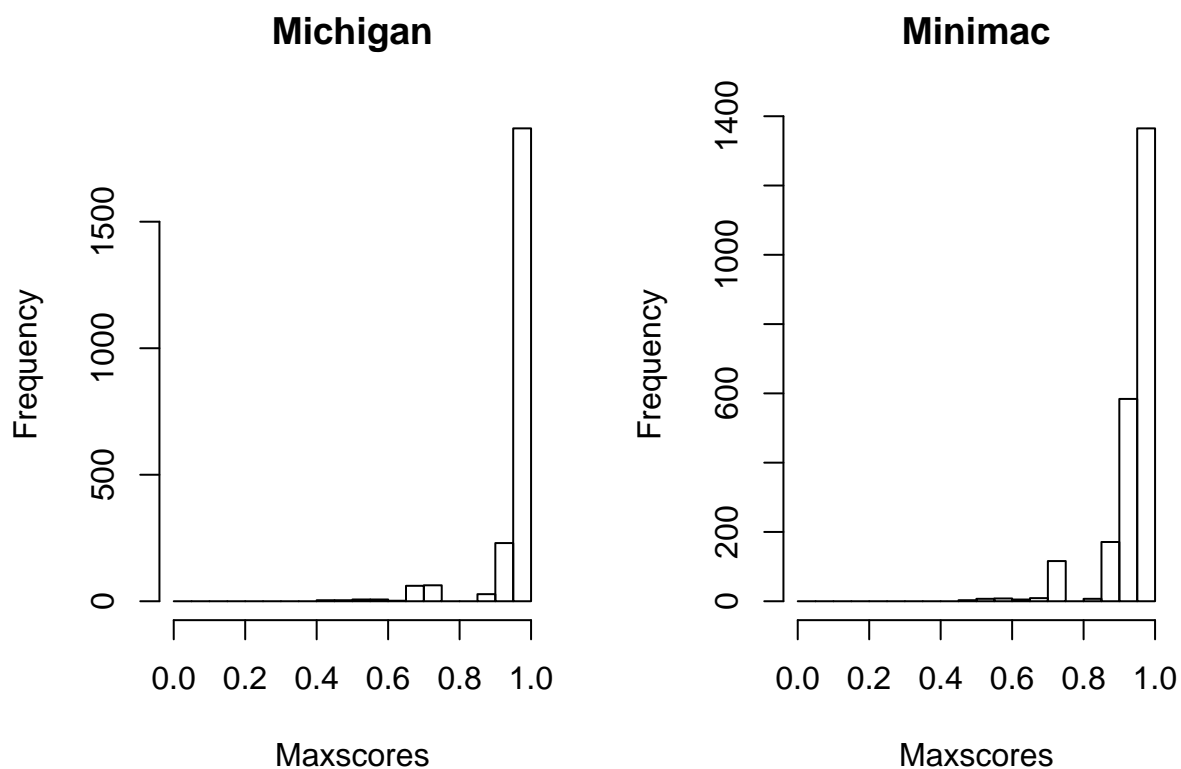

```
# Score correlation by individuals between both imputation methods
min(score_corr)
```

```
## [1] 0.9771856
```

```
max(score_corr)
```


```
## [1] 0.9973483
```

```
mean(score_corr)
```


```
## [1] 0.9866348
```

```
par(mfrow=c(1,1))
SCORE_CORR_HIST <- hist(score_corr, breaks=seq(0.9, 1, by=0.005),
  main="Score correlation by individuals",
  xlab="Score correlation")
```

Score correlation by individuals

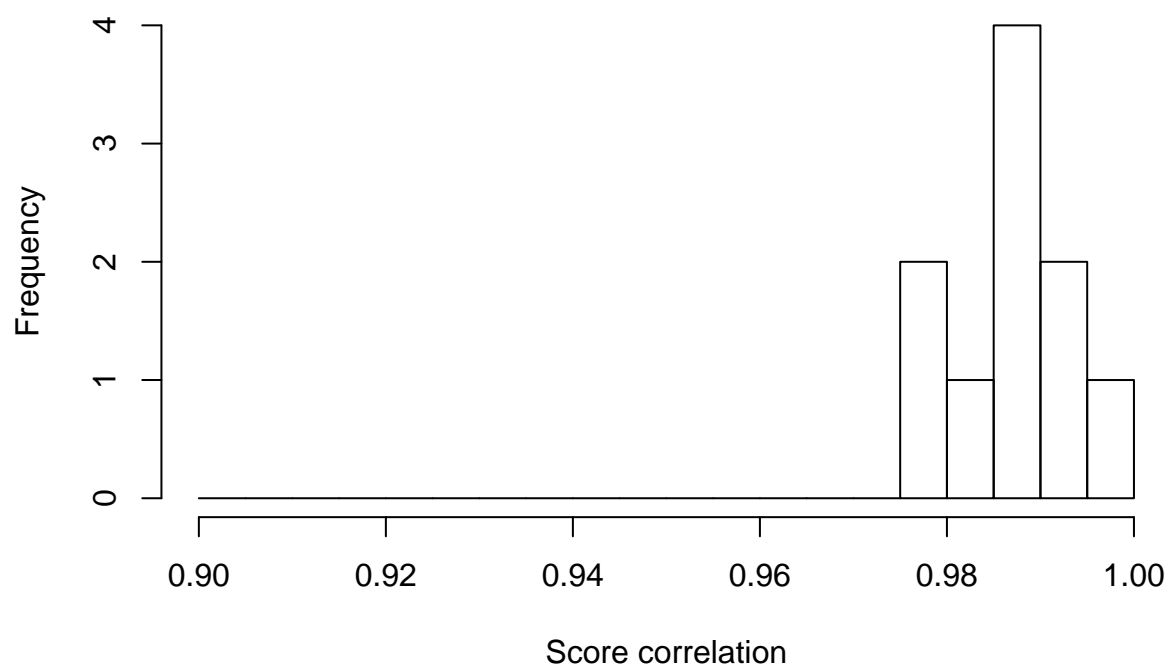

```
# Difference score between the highest similarity score and the second highest,  
# in both imputation methods  
par(mfrow=c(1,2))  
hist(diffscores(michigan_inv_chr7), breaks=seq(0, 1, by=0.05),  
     main="Michigan", xlab="Difference score")  
hist(diffscores(minimac_inv_chr7), breaks=seq(0, 1, by=0.05),  
     main="Minimac", xlab="Difference score")
```

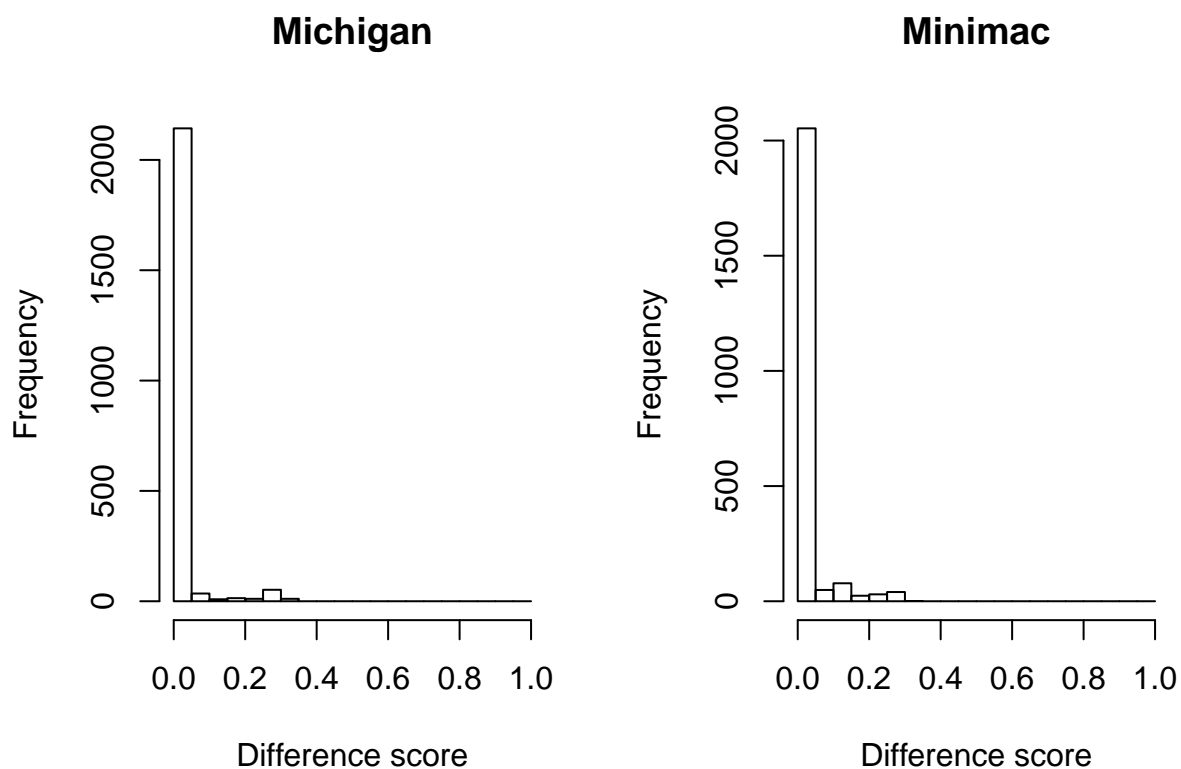

```
# Numbers of scores used
mean(numSNPs(michigan_inv_chr7))
```

```
## [1] 164
```

```
mean(numSNPs(minimac_inv_chr7))
```

```
## [1] 184
```

```
# Number of samples in both imputation methods before and after QC filtering
length(classification(michigan_inv_chr7))
```

```
## [1] 2275
```

```
length(classification(michigan_inv_chr7, minDiff = 0.1, callRate = 0.9))
```

```
## [1] 97
```

```
length(classification(michigan_inv_chr7, minDiff = 0.1, callRate = 0.9))/
  length(classification(michigan_inv_chr7))
```

```
## [1] 0.04263736
```

```
length(classification(minimac_inv_chr7))
```

```
## [1] 2275
```

```
length(classification(minimac_inv_chr7, minDiff = 0.1, callRate = 0.9))
```


```
## [1] 173
```

```
length(classification(minimac_inv_chr7, minDiff = 0.1, callRate = 0.9))/  
length(classification(minimac_inv_chr7))
```


```
## [1] 0.07604396
```

Plots with invClust

```
# Michigan  
par(mfrow=c(1,1))  
plotInv(michigan_invclust_chr7, classification = classification(michigan_inv_chr7))
```

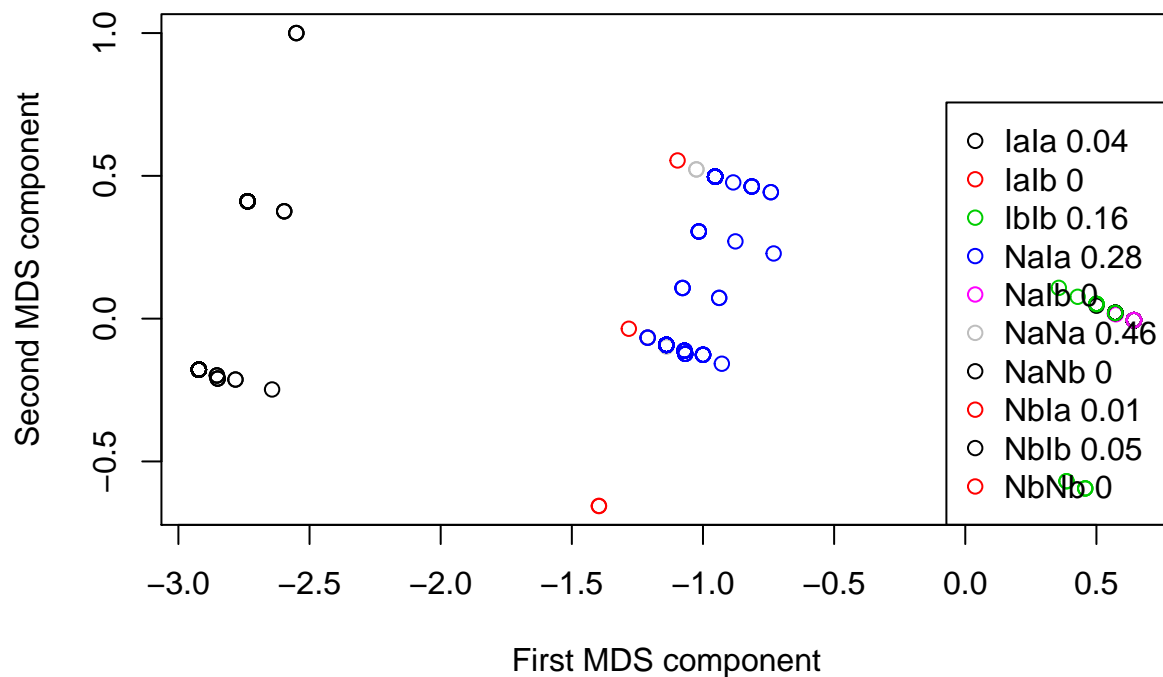

```
# Minimac
plotInv(minimac_invclust_chr7, classification = classification(minimac_inv_chr7))
```

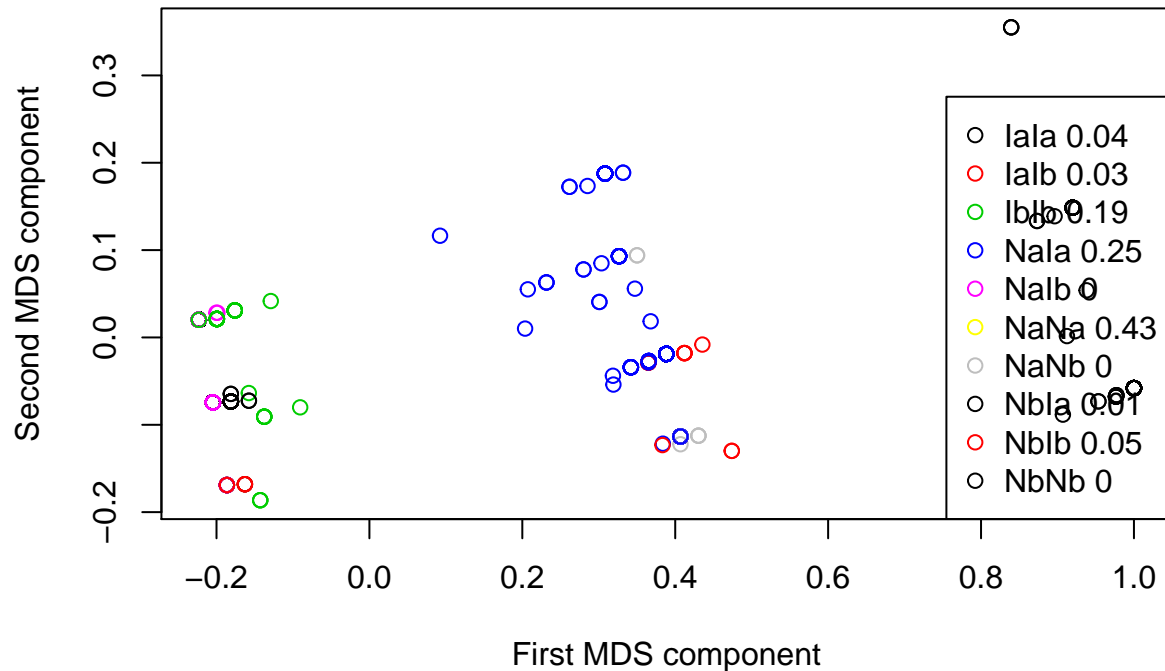

No filtered imputed data

```
nofilter_minimac_7
```

```
## class: CollapsedVCF
## dim: 1543 2275
## rowRanges(vcf):
##   GRanges with 5 metadata columns: paramRangeID, REF, ALT, QUAL, FILTER
## info(vcf):
##   DataFrame with 4 columns: AF, MAF, R2, ER2
## info(header(vcf)):
##       Number Type Description
##   AF 1      Float Estimated Alternate Allele Frequency
##   MAF 1     Float Estimated Minor Allele Frequency
##   R2 1      Float Estimated Imputation Accuracy
##   ER2 1     Float Empirical (Leave-One-Out) R-square (available only ...)
## geno(vcf):
##   SimpleList of length 3: GT, DS, GP
## geno(header(vcf)):
```

```
##      Number Type  Description
##      GT 1      String Genotype
##      DS 1      Float  Estimated Alternate Allele Dosage : [P(0/1)+2*P(1/1)]
##      GP 3      Float  Estimated Posterior Probabilities for Genotypes 0/0...
```

nofilter_michigan_7

```
## class: CollapsedVCF
## dim: 1543 2275
## rowRanges(vcf):
##   GRanges with 5 metadata columns: paramRangeID, REF, ALT, QUAL, FILTER
## info(vcf):
##   DataFrame with 4 columns: AF, MAF, R2, ER2
## info(header(vcf)):
##      Number Type  Description
##      AF 1      Float Estimated Alternate Allele Frequency
##      MAF 1      Float Estimated Minor Allele Frequency
##      R2 1      Float Estimated Imputation Accuracy
##      ER2 1      Float Empirical (Leave-One-Out) R-square (available only ...)
## geno(vcf):
##   SimpleList of length 3: GT, DS, GP
## geno(header(vcf)):
##      Number Type  Description
##      GT 1      String Genotype
##      DS 1      Float  Estimated Alternate Allele Dosage : [P(0/1)+2*P(1/1)]
##      GP 3      Float  Estimated Posterior Probabilities for Genotypes 0/0...
```

nofilter_minimac_inv_7

```
## scoreInvHapRes
## Samples: 2275
## Genotypes' table:
##   IaIa   IaIb   IbIb   NaIa   NaIb   NaNa   NaNb   NbIa   NbIb   NbNb
##   89   261   185   368   710   508   2   27  117   8
## - Inversion genotypes' table:
##   NN   NI   II
##   518  1222  535
## - Inversion frequency: 50.37%
```

nofilter_michigan_inv_7

```
## scoreInvHapRes
## Samples: 2275
## Genotypes' table:
##   IaIa   IaIb   IbIb   NaIa   NaIb   NaNa   NaNb   NbIa   NbIb   NbNb
##   89   40  536   595   0  866   1  22  121   5
## - Inversion genotypes' table:
##   NN   NI   II
##   872  738   665
## - Inversion frequency: 45.45%
```




```

# Select SNPs in both elements to represent them in the plot
snps_minimac_7 <- intersect(rownames(info(nofilter_minimac_7)), names(SNPsR2$inv7p11.2))

# Plot Imputation R2 vs scoreInvHap R2 (red line = filter in the previous data)
ggplot() +
  geom_point(aes(x = info(nofilter_minimac_7)[snps_minimac_7,]$R2,
                 y = SNPsR2$inv7p11.2[snps_minimac_7]),
             alpha = 0.2) +
  geom_vline(aes(xintercept=0.5), colour="red") +
  ggtitle("Minimac chr 7") +
  xlab("Imputation R2") +
  ylab("scoreInvHap R2")


```

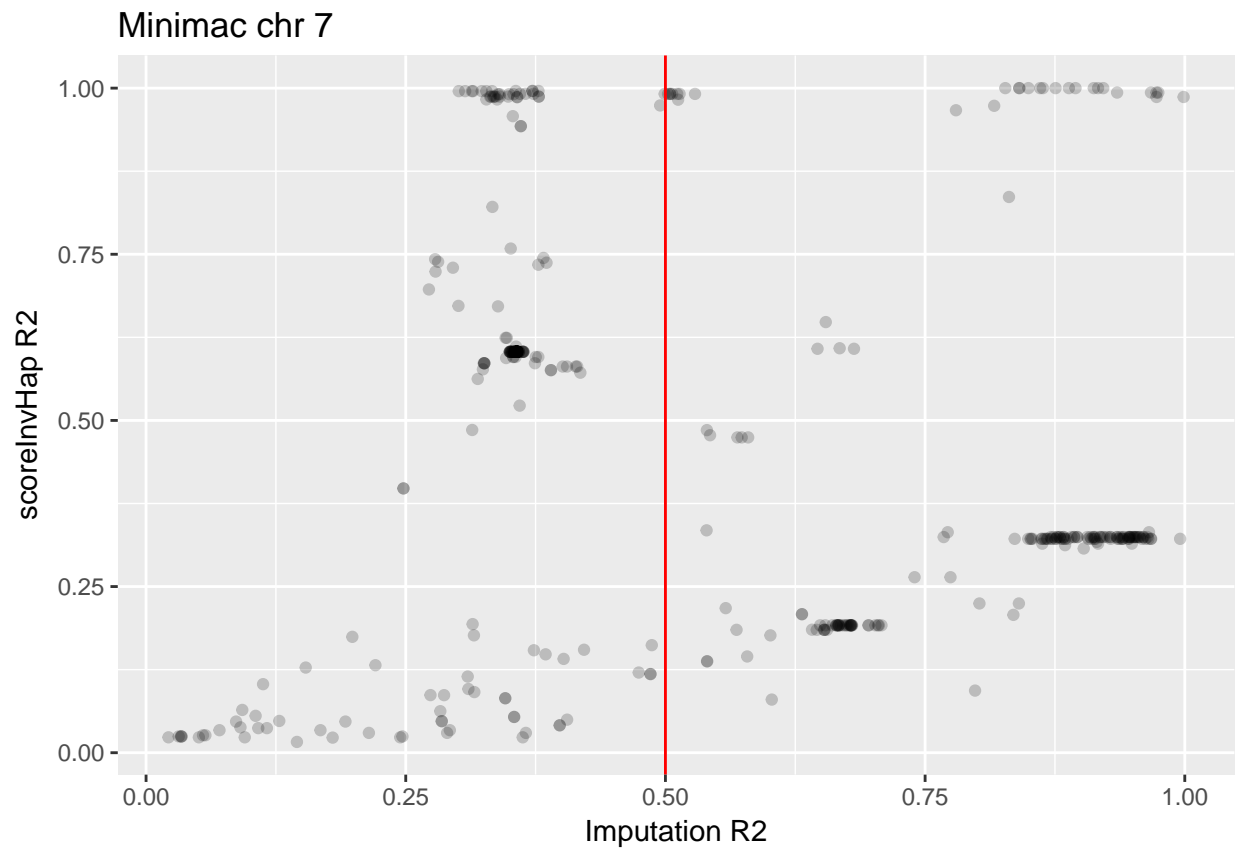

```

# Histograms of scoreInvHap R2 in the filtered imputed data and in the NO filtered imputed data
par(mfrow=c(1,2))
hist(SNPsR2$inv7p11.2[rownames(minimac_chr7)], breaks=seq(0, 1, by=0.02),
     main="Filtered chr7", xlab="scoreInvHapR2")
hist(SNPsR2$inv7p11.2[rownames(nofilter_minimac_7)], breaks=seq(0, 1, by=0.02),
     main="No filtered chr7", xlab="scoreInvHapR2")

```

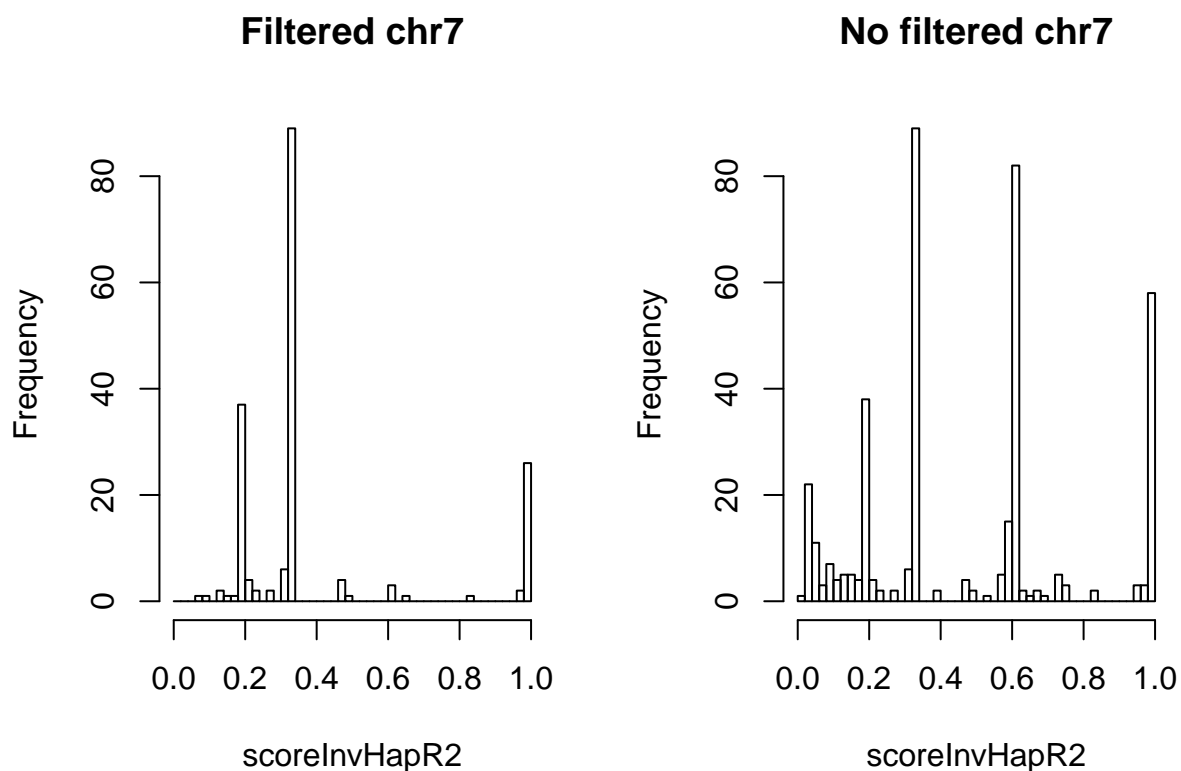

```
#Correlation between Imputation R2 and scoreInvHap R2 (NO filtered data)
cor(info(nofilter_minimac_7)[snps_minimac_7,]$R2, SNPsR2$inv7p11.2[snps_minimac_7])
```

```
## [1] -0.08281116
```

```
# Comparison table scoreInvHap with filtered and no filtered data
scoreinvhap_table_filt
```

```
##           Filtered
## No_filtered IaIa IaIb IbIb NaIa NaIb NaNa NaNb NbIa NbIb NbNb
##           IaIa   89    0    0    0    0    0    0    0    0    0
##           IaIb   0   38    0  223    0    0    0    0    0    0
##           IbIb   0    0   71    0    0  114    0    0    0    0
##           NaIa   0   32    0  336    0    0    0    0    0    0
##           NaIb   0    0  272    0    0  438    0    0    0    0
##           NaNa   0    0   90    0    0  418    0    0    0    0
##           NaNb   0    0    0    0    0    0    1    0    1    0
##           NbIa   0    0    0    6    0    0    0   21    0    0
##           NbIb   0    0    0    0    0    0    1    0  116    0
##           NbNb   0    0    0    0    0    0    0    0    1    7
```

```
sum(diag(scoreinvhap_table_filt))/sum(scoreinvhap_table_filt)
```

```
## [1] 0.4821978
```

```
# invClust plot of the NO filtered imputed data (minimac)
plotInv(nofilter_minimac_invclust_7,
        classification = classification(nofilter_minimac_inv_7))
```

