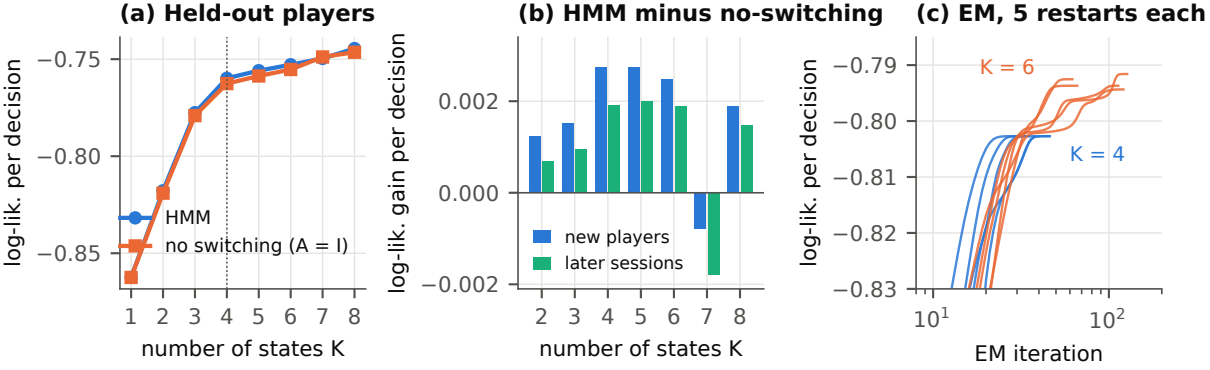
(a) Held-out players
log-lik. per decision
−0.75
−0.80
−0.85
HMM
no switching (A = I)
1 2 3 4 5 6 7 8
number of states K
(b) HMM minus no-switching
log-lik. gain per decision
0.002
0.000
−0.002
new players
later sessions
2 3 4 5 6 7 8
number of states K
(c) EM, 5 restarts each
log-lik. per decision
−0.79
−0.80
−0.81
−0.82
−0.83
K = 6
K = 4
10^1
10^2
EM iteration