Speaker-Embedding and Change-Score Sensitivity at Nepali–English Code-Switch Points

Ishan Gautam
Pulchowk Campus, Institute of Engineering
Pulchowk, Lalitpur
Tribhuvan University, Nepal
isangautam@gmail.com

***Abstract*—People who code-switch change language mid-utterance without changing identity. We ask whether, within one speaker, speaker-embedding similarity drops and a speaker-change score rises across a Nepali–English switch. In a pre-registered analysis of real speech, we compare same-speaker windows straddling a switch with matched same-language controls, for three speaker embeddings, over 17 YouTube channels (a proxy for speakers). The pre-registered tests of whether this reaches a full diarization pipeline could not be run. Between language runs of at least 1 s, similarity is lower across a switch for all three embeddings and in every channel (d_z 0.19–0.27), and cross-language same-speaker scores are 0.17–0.22 SD lower; for one embedding both estimates are below our smallest effects of interest. A two-window change score shows a small excess only where both language runs last at least 1 s (AUC 0.57–0.58), a primary cell we chose after seeing results on three separate pilot channels. Averaged over all switches there is no excess (AUC $\approx$ 0.49). No result reverses with any one channel left out (post hoc). For two embeddings the excess survives channel-level adjustment for measured acoustic covariates, but the observational design cannot show that language causes it. On Hindi– and Bengali–English (MUCS 2021) the direction is the same, but its speaker IDs are tutorials, not verified speakers. Two of three pre-registered mitigations could be tested. Their reductions of the excess (18.9% and 24.9%) are inconclusive (Holm $p = 0.20$ and 0.70), no larger than a non-significant score offset's, at unmeasured cost in missed speaker changes. In a post hoc check, two off-the-shelf diarization pipelines reported a speaker change at 4 and 1 of 300 natural switches, against 1 of 300 matched controls (not significant). The evidence is preliminary: no independent listener has checked the switch points.**

***Index Terms*—speaker embeddings, speaker diarization, speaker change detection, code-switching, Nepali, cross-lingual speaker verification, language identification, pre-registration**

I. Introduction

Speaker diarization relies on speaker embeddings and on scores that compare adjacent windows. If a language switch by one speaker (SS-DL: *same speaker, different language*) moves the embedding, a diarization system could report a speaker change that is not there. We test the first link of that chain. Is same-speaker embedding similarity lower, and a two-window change score higher, at natural Nepali↔English switches than at matched same-language boundaries of the same speaker? And do the two testable pre-registered mitigations reduce that excess? In short: between language runs of at least a second, same-speaker similarity is slightly but consistently lower across a switch and the change score slightly higher; averaged over all switches, most of which border a run shorter than half a second, there is no change-score excess, and neither testable mitigation demonstrably removed the excess. Two kinds of pre-registered test could not be run. One asks whether the excess survives segmentation, clustering and temporal smoothing in a full diarization system. The other asks whether a mitigation makes a system miss real cross-lingual speaker turns (DS-DL: *different speaker, different language*). Both need long-form audio and conversations with language-labelled turns, which we could not obtain (§III-C). The only pipeline-level evidence here is a post hoc, exploratory check with two off-the-shelf pipelines on D1 clips and artificial clip joins (§VIII). The paper is therefore a diagnostic study of embedding and change-score sensitivity, not an evaluation of diarization error.

That speaker embeddings rate the same speaker as less similar across languages is known from cross-lingual verification [1], [2] and, for synthetic Indic voices, from LASE [3]. DISPLACE reports aggregate diarization error on code-mixed conversations [4]. Our contribution is narrower. We measure the shift *at individual, natural switch points* in real speech, against matched same-speaker controls, for Nepali–English. We did not find a prior study at this boundary level.

We did not assume the answer. LASE found that the cross-script gap of off-the-shelf encoders shrinks for Indian-accented (synthetic) voices [3], so for speakers whose first language is Nepali the effect may be small. We pre-registered the study so that a small or null effect could still be reported. The sample, 17 confirmatory channels, was fixed by the data, not chosen for power. The pre-registration gives the power of this fixed sample at the smallest effects of interest, from pilot variance components at their upper 80% bound: 0.68–1.00 for the similarity test (H1) and 0.70–0.76 for the change-score test (H2-P0) across the three embeddings. We grade each claim with two labels. An excess measured at switch points is *switch-associated*. It is *covariate-robust* if it survives channel-level adjustment for measured acoustic covariates and phrase-boundary controls, and the non-adjacent embedding test (H3) agrees. The pre-registration calls this grade "language-attributable". Because the design is observational, it shows an association that remains after adjustment for the measured covariates, not that language causes the excess.

Contributions.

- A boundary-level protocol that compares speaker-embedding similarity and a two-window change score at same-speaker language switches with matched same-language controls, adjusted for measured acoustic covariates.
- Pre-registered results on real Nepali–English speech for three speaker embeddings and the change score (§V). The change-score excess appears only where both language runs last at least a second, a cell chosen as primary after the pilot, and is small there; averaged over all switches there is no excess.
- A pre-registered check of direction on Hindi– and Bengali–English (§VI), whose speaker labels are unverified.
- A pre-registered, inconclusive test of two mitigations against the switch-point excess (§VII). Neither is supported or does better than a language-aware score offset (itself not significant), and the adversarial one made the embedding more, not less, language-decodable, so the test does not address language invariance.
- An exploratory, post hoc check with two off-the-shelf diarization pipelines (§VIII). Natural switches rarely produced a false speaker change, not significantly more often than matched same-language boundaries.

Code, pre-registration and results are at github.com/ishangautam7/nepali-cs-diarization.

II. Related Work

Code-switching. Linguistic work distinguishes the insertion of single words or constituents into a matrix language from alternation between longer stretches of two languages [5], [6]. Doğruöz et al. [7] survey code-switching for language technologies, and the code-mixing index (CMI) measures how mixed a text is [8]. Our switch points include both kinds, and most are insertion-like (§IX).

Cross-lingual speaker representations. Speaker embeddings underestimate same-speaker similarity when the two utterances are in different languages, and probing shows that they also encode spoken content and channel [9]. Thienpondt et al. [1] describe this score shift and correct it with language information. More recent work removes language with subspace normalisation [10] or gradient-reversal adversarial training [2], [3]. Hosseini-Kivanani [10] and Li et al. [2] evaluate verification only. Li et al. apply the adversarial loss on real multilingual speech (TidyVoiceX); adding TTS speech to their full real training set did not improve verification, although they suggest it may help when real data are scarce. LASE [3] trains on TTS-generated cross-script pairs. Besides verification, it reports a synthetic code-switched diarization benchmark: 50 conversations concatenated from 2–4 TTS voices, one of which may switch language. Segments and the number of speakers are given, and it reports the adjusted Rand index and cross-script recall. LASE also reports that the cross-script gap of off-the-shelf encoders is smaller for synthetic Indian-accented voices (0.006 vs. 0.082 for WavLM-SV; 0.044 vs. 0.105 for ECAPA-TDNN). This is why we treat a small or null effect as a real possibility. Our H1 and H3 therefore measure a known phenomenon on a new language pair. What is new is where we measure it: at individual natural switch points in real speech, against matched same-speaker controls.

Neural diarization. Modern systems combine a powerset segmentation model [11] with embedding clustering. DiariZen pairs WavLM-based segmentation with WeSpeaker embeddings and VBx-style clustering [12], [13], and DiaPer uses perceiver attractors [14]. We do not know of an evaluation of these systems at within-speaker language switches.

Code-mixed and low-resource diarization. The DISPLACE challenges [4], [15] report aggregate diarization error on multilingual Indian conversations, and DISPLACE-M extends this to code-switched medical speech [16], [17]. The closest Nepali work trains multilingual diarizers and evaluates them on Nepali–Hindi speech [18]. These studies report corpus-level error on real conversations. None of them, nor LASE's synthetic benchmark, reports embedding similarity or a change score at individual natural switch points.

Language vs. speaker change. Mishra and Prasanna [19] detect spoken-language change by analogy with speaker-change detection, which suggests that the two are acoustically entangled. Our acoustic covariates and phrase-boundary controls (§IV) address part of this entanglement.

III. Data

A. D1: Nepali–English code-switching corpus (diagnostic)

We use a Nepali–English code-switched corpus of STEM lectures [20], with its revision pinned in the release. It has 20,805 clips (58.4 h) from 161 source videos across 20 YouTube channels, at 16 kHz and loudness-normalised.[1] Its transcripts are mostly machine-generated; 777 clips (586 train, 23 validation, 168 test) are human-verified, so language tags and switch points inherit transcription errors, which the listening check (§V) bounds for the primary cell. The dataset's `speaker_id` is the *channel*, not a verified person, and one channel may carry more than one voice. We therefore run a per-video speaker-purity audit (§IV) and report a purity-audited subset as a sensitivity analysis. We use only the real (non-augmented) split. The 3 validation channels are the pilot, used to fix all thresholds. The confirmatory analysis then runs once on the 17 remaining channels (15 training and 2 test), pre-registered and frozen before any confirmatory statistic is computed.

B. D4: MUCS 2021 Hindi/Bengali–English (direction check)

For a pre-registered check of direction (H7), we use the MUCS 2021 code-switched subsets [21]: Hindi–English (52,825 train and 3,136 test clips) and Bengali–English (26,606 and 4,275), cut from narrated computer-science spoken tutorials. The MUCS authors state that speaker information was not available, and that their speaker counts assume each tutorial has a different speaker [21]. In our copy every

[1]Data-set labels follow the pre-registration; D2 and D3 were the planned conversation sets (§III-C).

speaker ID covers one recording, except one Hindi ID that covers two. A MUCS "speaker" is therefore a tutorial, and one narrator may appear under many IDs. MUCS often writes English words in native script, for example the English word "office" in Devanagari. English loans make up 7.1% of Hindi and 4.7% of Bengali native-script tokens, so a Latin-script rule alone mislabels the language. We therefore build a per-script lexicon from the frequent native-script word forms. LLM-based labellers, in eight parallel runs, labelled each form as loan, native or name. The lexicon has 763 loans and 67 names for Hindi, and 393 and 21 for Bengali, and its candidate review lists cover 97.0% of Hindi and 94.4% of Bengali native-script tokens. The AI agent that ran the analysis (§XI) spot-checked 60 items and found one arguable label, Bengali "column" labelled native. These checks are text-only checks of LLM labels by an LLM agent, not human or audio validation. For the two pairs, this gives 5,491 (train) / 237 (test) and 3,269 / 580 SS-DL switch points eligible for H1 with 1 s windows, of which 4,267 and 2,769 have matched controls (3,828 and 2,582 of these sets fall in tutorials that meet the 5-unit minimum of §VI and enter the H1 tests), and 5,428 / 235 and 3,253 / 584 in the primary detection cell (§IV), of which 5,071 and 3,510 have cell controls.

C. Long-form audio and conversation data (not obtained)

D1's clips last 3–14 s, too short for the planned tests of segmentation, clustering and temporal smoothing over a recording, and the long-form source videos could not be downloaded. The DS-DL (different-speaker, different-language) side needs conversations with human references for both speaker *and* language. The pre-registered source was DISPLACE 2024, whose language-diarization track labels the language of every segment [15], with DISPLACE-M [16] as the fallback. We were not granted access to DISPLACE 2024 during the study. DISPLACE-M is also access-controlled and has no language references. The pre-registered full-pipeline tests, the DS-DL non-inferiority test (H5), the ordering of the mitigations (H6) and the joint trade-off were therefore not run (deviation 7 in the repository's deviation log). Apart from the artificial speaker changes of the exploratory check (§VIII), no result in this paper involves a speaker change.

IV. Method

An AI coding agent wrote and ran the analysis code and drafted the text under the author's direction; §XI details the use of AI tools.

A. Switch points, controls and matching

We romanise each word with uroman [22], which restores Devanagari inherent vowels. We then force-align the clip on the GPU with torchaudio's MMS_FA bundle (MMS-300M [23]), using Whisper [24] word timestamps only as a cross-check. We tag each word's language from the transcript script with a loan/name lexicon, and detect pauses with the Silero VAD [25]. An SS-DL switch point is the boundary between two adjacent words of the same speaker in different languages. It needs both boundary words aligned and no neutral or loan word between the two runs, and no analysis window may contain a neutral or loan word. Each point goes into a run-length stratum (< 0.5, 0.5–1, ≥ 1 s) set by the shorter adjacent language run. Two analysis families use the points differently. The *embedding* family (H1) compares each switch point with up to three same-language control boundaries from the same clip, or else the same video, matched exactly on pause bin, position bin and context length. They are also matched, implicitly, on run-length stratum: both runs must last at least a second, which places every H1 point in the ≥ 1 s stratum. The *detection* family (H2-P0) compares the switch points with all same-speaker controls in the same video $\times$ pause-bin $\times$ position-bin cell, standardised per cell. The collar is $c = 0.5$ s. H1's windows end and start at the edges of the pause, so they exclude it; P0's two 1 s windows meet at the middle of the pause (or at the word boundary if there is none), so each holds half of any pause. Within each family, switch points and controls are measured in the same way.

Primary detection cell. The primary cell, `p0L1`, keeps only switch points where both language runs last at least a second, with a clean ± 1 s field. On the confirmatory channels `p0L1` holds 3,962 switch points with cell controls (3,851 train and 111 test; 107 more have no control in their cell), compared with 31,844 controls in 964 cells, and the pooled cell 120,630 (the sum of its run-length strata).

How the primary cell was chosen. The study plan, committed before the pilot, pooled all switch points. On the 3 pilot channels the pooled AUC was 0.486–0.494. At τ, switch points between runs of at least 1 s fired at 15–18% (535 points), against about 7% below 0.5 s and 10% at controls; these rates were not standardised by cell and may partly reflect pauses. The pilot decision first kept the pooled cell, because changing the primary cell after seeing pilot effects could bias the test (decision 13 in the repository's decision log). After an LLM-based review of the pilot, `p0L1` was named primary on construct grounds: a detector with 1 s windows cannot register a sub-second insertion as a two-sided change (decision 16; commit `e430e1e`). The cell gives P0 the run-length condition that the study plan had fixed for H1 before the pilot (both runs at least 1 s). The choice was therefore made after pilot outcomes had been seen. The pre-registration document was drafted after this change (commit `bd60821`) and names `p0L1`, and the configuration was frozen at `11eb77c` (tag `m2a-freeze`) before the one confirmatory run (§XI gives the commit order and times). The 17 confirmatory channels are disjoint from the pilot channels as channels (the purity audit suggests one pilot video may share a confirmatory channel's teacher), which protects the test's error rate. The question it tests, however, was chosen with knowledge of pilot outcomes, and on the confirmatory channels it yields a positive result where the original pooled estimand shows no excess. We therefore report both.

B. Systems

We test three speaker embeddings: E1 ECAPA-TDNN [26], E2 the WeSpeaker ResNet34-LM embedding [27] of pyannote Community-1 (revision `3533c8cf`), and E3 WavLM-Large + ECAPA [28]. The change score P0 scores each boundary by $d(t) = 1 - \cos$ between the 1 s windows before and after it, computed on a dense grid of positions. Within $\pm c$ of the boundary it keeps the highest peak (discarding smaller nearby peaks) and reports a change, or *fires*, when that peak exceeds an operating point τ. We fix τ on the pilot channels so that 10% of controls fire. ΔFAR is how much more often P0 fires at switch points than at their matched controls, standardised within each cell. Every fire at a same-speaker boundary is a false alarm, so ΔFAR is a change-score false-alarm excess, not a diarization error rate. P0 is a transparent probe of what a change detector sees, not a diarization system. In the primary cell, P0's score at the boundary compares two 1 s windows much like H1's (they meet at the middle of any pause instead of excluding it), in a similar population (both runs at least 1 s), so H2-P0's AUC largely restates H1's similarity drop as a ranking against cell controls; what P0 adds is peak picking and the operating point (ΔFAR). Full-pipeline variants (P1: pyannote Community-1 with VBx [13] or an AHC back end on E1–E3; P2: DiariZen [12]) were planned to test whether the excess survives segmentation and clustering. They were not run (§III-C); §VIII reports a post hoc check with the released pipelines instead. On the pilot channels we also built a language-change score: a language-ID model [29] gives language posteriors for the 1 s window on each side of a boundary, and the score is the Jensen–Shannon divergence between them. It scored switch points above cell-matched controls with AUC 0.58 overall and 0.72 where the shorter run lasts at least 1 s. It also scores pause-bearing phrase boundaries above other controls (AUC 0.56), so it is a weak, partly pause-sensitive check that the switch points carry a language change.

C. Speaker-purity audit

Because `speaker_id` is a channel, we audit it with two embedding families that are not under test (TitaNet-L and CAM++). Each clip is compared only with same-video clips of similar language mix, defined by speech type $\times$ the channel's tertile of the code-mixing index (CMI) [8], so that a language-sensitive embedding does not flag English-heavy clips. A clip is flagged when, under both embeddings, its mean cosine to those clips lies more than 3.5 robust SDs below the cell median. A video is split off when its centroid is below the 1st percentile of within-video split-half cosines to every other video of its channel. The audit flagged 688 of 20,444 assessable clips (3.4%), at the same rate in every language-mix stratum (3.2–3.6%), and split off 34 of 161 videos. Different videos of one channel typically have a centroid cosine of 0.77–0.95, so the split-off rule also separates recording sessions of one teacher. Judged by embedding similarity against the 99.9th percentile of cross-channel video similarity, six videos look like other speakers, and one pilot-channel video may share the teacher of a confirmatory channel (that channel is left out in §V). Apart from that pilot video, the closest pair of videos from two different channels has a cosine of 0.65/0.66 (TitaNet-L/CAM++), below the 0.77–0.95 typical of two videos of one channel, so the channels appear to be different speakers. With flagged clips dropped and split-off videos as their own clusters (46 clusters), every primary result keeps its direction and meets its smallest effect: H1 d_z 0.25/0.21/0.26, H2-P0 AUC 0.58/0.56/0.59 and H3 $-0.24/-0.20/-0.25$ target SD (E1/E2/E3). Because sessions of one teacher then count as separate clusters, these p-values are optimistic, and the subset analysis is descriptive. A blind listening check covered the first 117 of the 230 planned pairs, in their randomised order, with one rater, the author, who knew the hypotheses (deviations 8 and 12). The main voice of a flagged clip was judged different from its video's usual speaker in 51% of the usable pairs (43 of 84; 95% CI 41–62%), against 8% for control pairs of two unflagged clips (1 of 12; 1–35%). Of the flagged pairs, 14% were unusable. By this check about half of the flagged clips are other voices, which the subset analysis removes. The audit is embedding-based, and the check is not an independent human verification of speaker identity. The mixed models are reported on all clips only (§V).

D. Mitigations

We pre-registered three mitigations meant to remove language information, and three baselines to compare them against. The mitigations are M1, a training-free subspace projection that removes the language direction from the embedding [10]; M2, a language-ID–gated change score [29]; and M3, gradient-reversal adversarial fine-tuning [30] of the embedding on real speech only (no TTS). The baselines are B0, the unmodified system with its operating point recalibrated; B1, language-wise mean centring; and B2, a language-aware score offset [1]. Each mitigation was to be scored on the SS-DL excess (H4), on DS-DL misses (H5), and on their ordering (H6: M3 best, M1 smallest gain). Without conversation data (§III-C), only H4 can be tested, on D1. M2 cannot be tested even there: its gate weight was to be tuned on conversations, because on D1, which has no real speaker changes, any gate lowers the fire rate at switch points and its cost in missed speaker changes cannot be seen. M2 therefore keeps its place in H4's Holm family at $p = 1$ and is reported as not tested. A lower SS-DL excess alone is not an improvement, because H5 could not check the cost in missed real speaker changes.

H4 design (pre-registered supplement). The back end is P0 with E3, as in the diagnostic analysis. The 15 train channels are scored in 5 folds of 3. For each fold, B1's means, B2's offset and M1's language direction are estimated, and M3 is trained, on the other 12 channels only. Every operating point τ is set on the 3 pilot channels to a 10% control fire rate, and M3 early-stops on them. M3 starts from E3 with WavLM frozen. It trains on the fold's channels, with flagged clips dropped, plus a Nepali speaker pool from IndicVoices [31]. It uses AAM-softmax [32], supervised-contrastive and gradient-reversal language losses and a distillation term towards E3 (weight 0.3), with five seeds per fold. The distillation weights

0, 0.1 and 1 and four ablations, each at seed 0, are secondary analyses. For each channel, $\delta_M = \Delta\mathrm{FAR}_M - \Delta\mathrm{FAR}_{B0}$ on the primary cell (M3 averaged over seeds) is tested by an exact one-sided sign-flip over channels, with p-values Holm-adjusted over M1–M3. Support also needs a reduction of at least 25% of B0's excess.

E. Statistics (pre-registered)

We compute per-cluster statistics with exact sign-flip permutation tests over the 17 D1 confirmatory channels (2^{17} sign patterns) and BCa bootstrap intervals. These tests treat channels as independent speakers. Holm correction adjusts the tests' p-values within hypothesis families: $m = 3$ for H1 and H3, and $m = 5$ for H2, where the pre-registered P1 and P2 pipeline tests, which were not run, hold places at $p = 1$ (the post hoc check of §VIII is not these tests). This can only make the reported H2 verdicts more conservative. Holm changes only p-values: the estimates (AUC, d_z, SD units) are unadjusted, and their BCa intervals are at the level $1 - 0.05/m$. On D4, where clusters number in the hundreds, the sign-flip draws 2^{17} random sign patterns, and $p = (b{+}1)/(2^{17}{+}1)$, where b counts the patterns at least as extreme as the observed statistic. H3 is the mean target-score difference (cross-language minus mono-language) on lag-matched same-speaker trials, in units of each embedding's target-score SD, tested by the same channel-level sign-flip. For H1, d_z is the mean over channels of each channel's mean cosine drop (control minus switch), divided by the pooled within-channel SD of the per-set drops. For H2-P0, a channel's AUC is the probability that a switch point's $d(t)$ exceeds that of a same-cell control (ties count half), pooled over cells weighted by switch points; the estimate is the mean over channels. H1 does not balance its controls by language; H3 weights Nepali–Nepali and English–English trials equally, so it guards against language-specific score levels. Each primary hypothesis is reported as *supported*, *significant, below the smallest effect* (pre-registered label: *nonzero but trivial*), *reversed*, *equivalent* (TOST), or *inconclusive*. All 17 non-pilot channels are confirmatory, and the 3 validation channels are the pilot. An excess is *covariate-robust* (pre-registered label: language-attributable) only if four tests are all significant, each at $\alpha = .05$ without further multiplicity adjustment: (i) the primary test, after Holm correction; (ii) a channel-level test adjusted for the acoustic covariates; (iii) a phrase-boundary contrast; and (iv) the non-adjacent test H3, after Holm correction. The covariate-adjusted test uses F0, energy, speaking rate, spectral tilt and SNR, as left–right changes. The plan's C50 reverberation proxy was not estimated, because its source, the gated Brouhaha model, was not accessible. The phrase-boundary contrast repeats the primary test on switch points with a pause > 150 ms and their controls in the same pause bins, which are same-language phrase boundaries. Unmeasured differences, such as reverberation or prosodic phrasing that the covariates miss, cannot be excluded, nor can syntactic position: switch points sit at run edges, which often coincide with syntactic boundaries, while controls lie inside runs. A logistic GLMM with the acoustic covariates, pause bin and position is a descriptive sensitivity model, not the grading rule.

TABLE I

D1 PRIMARY OUTCOMES (FROZEN RUN). OUTCOMES FOLLOW FROM THE HOLM-ADJUSTED SIGN-FLIP p-VALUES AND THE SMALLEST EFFECTS OF INTEREST (SESOI: d_z 0.2, AUC 0.55, 0.2 SD); THE ESTIMATES ARE UNADJUSTED. BCA CIS AT $1 - 0.05/m$: 98.3% FOR H1 AND H3 ($m = 3$), 99% FOR H2-P0 ($m = 5$). †SIGNIFICANT, POINT ESTIMATE BELOW THE SESOI; THE CI INCLUDES THE SESOI, SO A NEGLIGIBLE EFFECT IS NOT ESTABLISHED (PRE-REGISTERED LABEL: NONZERO BUT TRIVIAL). H2-P0 USES A PRIMARY CELL CHOSEN AFTER THE PILOT (§IV); OVER ALL SWITCH POINTS ITS AUC IS 0.485–0.493 (TABLE II). H1 USES 3,695 MATCHED SETS (426 SWITCH POINTS UNMATCHED).

H	Model	Estimate (CI)	Outcome
H1	E1	d_z 0.271 (0.203–0.348)	supported
H1	E2	d_z 0.194 (0.135–0.266)	significant†
H1	E3	d_z 0.254 (0.198–0.305)	supported
H2-P0	E1	AUC 0.584 (0.559–0.618)	supported
H2-P0	E2	AUC 0.573 (0.547–0.604)	supported
H2-P0	E3	AUC 0.582 (0.564–0.601)	supported
H3	E1	−0.215 SD (−0.240–−0.175)	supported
H3	E2	−0.173 SD (−0.204–−0.124)	significant†
H3	E3	−0.203 SD (−0.239–−0.152)	supported

TABLE II

H2-P0 DETECTION. THE `p0L1` AUC COLUMN IS THE PRIMARY TEST'S ESTIMATE, WHOSE p-VALUE IS HOLM-ADJUSTED (CIS IN TABLE I); POOLED `det`, `det_w1` AND ΔFAR ARE SECONDARY AND UNADJUSTED. ΔFAR IS CELL-STANDARDISED ON `p0L1` AND AVERAGED OVER THE 17 CHANNELS WITH EQUAL WEIGHT (FIG. 1). PARENTHESISED VALUES ARE EXACT ONE-SIDED SIGN-FLIP p OVER CHANNELS, UNADJUSTED.

Model	p0L1 AUC	pooled det	det_w1	ΔFAR at τ (p)
E1	0.584	0.488	0.480	+2.46 pp (0.046)
E2	0.573	0.485	0.477	+2.95 pp (0.023)
E3	0.582	0.493	0.486	+2.73 pp (0.003)

V. DIAGNOSTIC RESULTS: EMBEDDINGS AND CHANGE SCORE ON D1

Confirmatory run on 17 D1 channels with the frozen configuration (tag `m2a-freeze`). Exact sign-flip tests over channels with Holm-adjusted p-values; the estimates are unadjusted, with BCa intervals at $1 - 0.05/m$. All nine primary tests are significant (Table I). Every one of the 17 channels shows the predicted direction for H1 and H2-P0 with all three embeddings, and for H3 with E1 and E3 (16 of 17 with E2). These are not nine independent findings: H1 and H2-P0 compare similar 1 s windows, and H3 uses the same embeddings.

The smallest effects of interest are $d_z = 0.2$ (H1), AUC $= 0.55$ (H2-P0) and 0.2 target-score SD (H3). "Supported" means significant with a point estimate at least this large, and "significant, below the smallest effect" means significant with a smaller point estimate. The second grade does not show that the effect is negligible: for E2 both intervals include the smallest effect (H1 0.135–0.266; H3 −0.204 to −0.124). There are three detection cells: `p0L1`, the primary cell, where both language runs last ≥ 1 s with a clean ± 1 s field; pooled `det`, all switch points (± 0.5 s); and `det_w1`, all switch

points with ± 1 s controls. The detection result is therefore conditional: the excess appears at switches between runs of at least a second, and not across switches in general (pooled AUC 0.485–0.493; for E2 the 99% intervals of both pooled cells lie just below 0.5).

Pre-registered secondary outcomes put the size in context. With 0.5 s windows (21,721 matched sets, 17 channels), H1's d_z is 0.13/0.10/0.12 (E1/E2/E3; 98.3% CIs 0.10–0.16, 0.07–0.14, 0.09–0.14), below the smallest effect of interest; with 1.5 s windows (862 sets, 16 channels) it is 0.34/0.24/0.36. Longer windows admit only longer runs, so window length and run length are confounded here. In verification terms the shift is 0.6–0.9 pp of EER (6–8% relative): on H3's trials the EER is 12.9/9.5/11.4% for cross-language and 12.2/8.9/10.5% for mono-language target trials. At τ, P0 fires at 22–25% of same-language boundaries with a pause over 150 ms, at 13–17% of primary-cell switch points and at 8–12% of other controls (channel means, not cell-standardised), so for this detector a pause is a larger source of within-speaker false alarms than a language switch.

The operating-point excess is small and uneven across channels (Fig. 1). ΔFAR is positive in 9, 12 and 13 of the 17 channels for E1, E2 and E3, and ranges from -7.9 to $+23.2$ pp. Table II reports the pre-registered equal-weight mean over channels. Weighting each switch point equally instead gives $+0.78$, $+2.00$ and $+1.17$ pp: the largest channel (584 switch points) is negative for all three embeddings, and the largest positive values ($+23.2$, $+15.2$ and $+14.0$ pp) come from channels with only 13 and 39 switch points.

The detection excess is concentrated at longer runs (exploratory stratification). Pooled `det` AUC rises from ≈ 0.48 when the shorter run is < 0.5 s to ≈ 0.59 when it is ≥ 1.0 s. This fits a 1-second detector being unable to register shorter insertions, though that reading is exploratory.

After acoustic covariates and phrase-boundary controls, H1 is *covariate-robust* (all four tests significant; reverberation is not among the measured covariates) for all three embeddings. The H2-P0 excess is covariate-robust for E2 (adjusted coefficient in the predicted direction in 11/17 channels, $p = .031$) and E3 (10/17, $p = .008$), and only switch-associated for E1 (9/17, $p = .079$). For H1 the descriptive mixed model points the same way. It gives a switch effect of $-0.030/-0.024/-0.031$ in cosine (E1/E2/E3; $|z| \geq 7.3$), hardly changed without the acoustic covariates ($-0.033/-0.027/-0.034$). The H2-P0 logistic GLMM gives log-odds of $+0.23/+0.31/+0.12$ (z 1.40/1.95/1.15; one-sided p .081/.026/.124). In this descriptive model the excess is therefore weak and, except for E2 one-sided, not significant. E3's fit used the pre-registered fallback structure without the random slope and video level, because the fuller fits were singular.

Two pre-registered sensitivity analyses leave every outcome category unchanged. The first drops points whose boundary words align with probability below 0.093, keeping 240,915 of 255,695 points (H1 d_z 0.25/0.17/0.23, H2-P0 AUC 0.58/0.57/0.58 for E1/E2/E3). The second leaves out the 2 test channels (H1 d_z 0.25/0.20/0.26, AUC 0.58/0.58/0.58, H3 $-0.21/-0.17/-0.21$ SD). Three more analyses re-extract the switch points with one rule changed: re-tagging "I" and capital "A" as English, keeping the low-alignment clips, and counting loan words in the language they are pronounced in. The boundary pipeline had to be rebuilt after a compute-host loss (deviation 6), so each variant is compared with a reference run on the rebuilt, unvaried boundaries. No H2-P0 or H3 category changes in any of these four runs (AUC 0.57–0.58; H3 does not use the switch points). The one grade that moves is E2's H1, which sits at its smallest effect of interest throughout. Its d_z is 0.205 in the reference run and 0.211 and 0.209 in the first and third variants (supported), but 0.183 with the low-alignment clips kept (significant, below the smallest effect, as is the frozen 0.194). E1 and E3 stay supported (d_z 0.24–0.28). E2's H1 grade is therefore borderline, and the frozen verdicts in Table I stand. The pre-registered repeat of the attribution models with Brouhaha's SNR and reverberation estimates depended on access to that gated model. Access was not obtained, so the repeat was not run.

Leaving out one channel (post hoc, exploratory). We re-estimated each main effect 17 times, each time without one confirmatory channel, from the frozen per-channel statistics. No estimate changes direction, and every primary test stays significant (one-sided sign-flip over the remaining 16 channels, unadjusted $p \leq 3.1 \times 10^{-5}$). With channels weighted equally, H1's d_z ranges over 0.254–0.290 (E1), 0.181–0.204 (E2) and 0.245–0.266 (E3), H2-P0's AUC over 0.567–0.589, always above its smallest effect, and H3 over -0.224 to -0.167 SD. E2's H1 and E3's H3, which sit at their smallest effects, cross them in 5 and 4 of the 17 fits. Weighting switch points equally gives slightly smaller values, again with no change of direction (H1 d_z 0.180–0.267, H2-P0 AUC 0.563–0.585); E2's H1 then crosses its smallest effect in 3 of the 17 fits. The pooled `det` AUC stays below 0.5 in every fit (0.482–0.498, from the rebuilt inputs, which reproduce the frozen pooled AUCs to three decimals). The least stable quantity is E1's channel-averaged operating-point excess. It rests largely on the smallest channel (13 primary-cell switch points, ΔFAR $+23$ pp): without that channel it is $+1.17$ pp ($p = .09$). For E2 and E3 it stays between $+2.0$ and $+3.6$ pp. Leaving out the confirmatory channel that may share a teacher with a pilot-channel video changes no primary estimate by more than 0.006; that video and the channel's four videos form the four closest cross-channel pairs in the corpus.

A blind listening check, with the author as the only rater, covered the first 352 of the 450 planned items, in their randomised order (deviations 8 and 11). It found no audible language change at 6.3% of the primary-cell switch points (95% CI 2.0–11.6%), and a different speaker, overlap or noise at none of them. It found a language change at none of the cell's controls. The marker lay within about 0.1 s of a word boundary at 82% (74–89%). Correcting ΔFAR for this contamination raises it by about 7%, to $+2.63/+3.15/+2.91$ pp for E1/E2/E3. This correction is descriptive and assumes that a mislabelled point fires like the other condition. Fig. 2 illustrates the embedding geometry behind H1/H3.

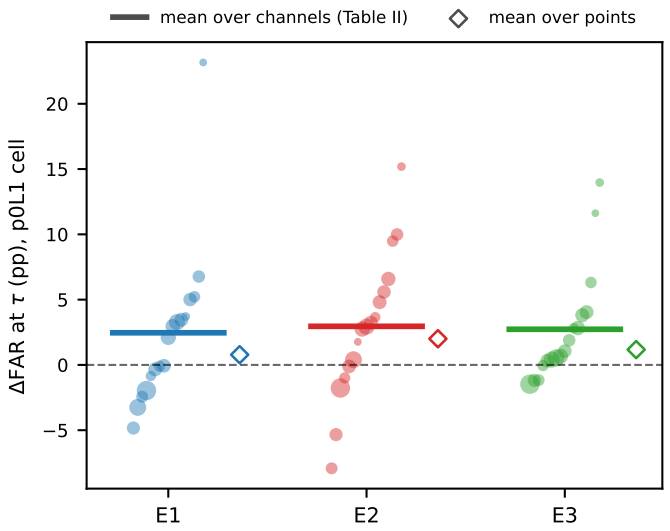


Fig. 1. Change-score excess at the pre-registered operating point on D1 (primary `p0L1` cell, 17 confirmatory channels). Each dot is one channel's cell-standardised ΔFAR: the fire rate at its same-speaker switch points minus that of the matched same-cell controls (video × pause × position), with τ calibrated to a 10% control fire rate on the pilot channels. Dot area grows with the channel's number of switch points (13 to 584); horizontal offset within an embedding is by rank only, to reduce overlap. Bars mark the equal-weight mean over channels, the pre-registered statistic of Table II ($+2.46/+2.95/+2.73$ pp). Diamonds mark the mean over switch points ($+0.78/+2.00/+1.17$ pp). Single channels vary widely; for E1 the equal-weight mean rests largely on the smallest channel (13 switch points; §V). Drawn from the frozen result file alone.

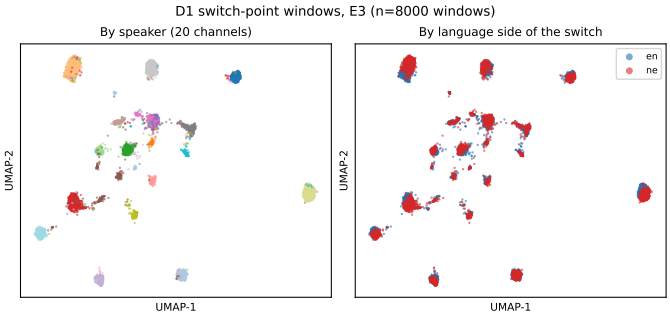


Fig. 2. UMAP [33] of D1 switch-point windows (E3, 8000 windows). *Left:* coloured by channel, our proxy for speaker. Windows cluster by channel: a linear probe identifies the channel across sessions with balanced accuracy 0.95 (six channels per fold, chance 0.17). *Right:* coloured by the window's language (*en*/*ne*). The two languages are largely interleaved within each channel, with a small residual offset consistent with the measured cross-language shift (H1/H3). A linear probe still recovers the window's language with balanced accuracy 0.76 (chance 0.5). This is a descriptive illustration, not a test. The probe accuracies come from the H4 secondary analysis on the clean D1 windows of its five folds, not from the plotted sample.

VI. Direction Check on D4 (Hindi– and Bengali–English)

We repeat the H1 and H2-P0 tests on D4 (MUCS 2021). They were pre-registered and frozen separately (`h7-freeze`, commit `a68e5b1`) before any D4 outcome was computed. Clusters are MUCS speaker IDs, that is, tutorials: 364/394 of 550 Hindi IDs and 235/254 of 307 Bengali IDs meet the 5-unit minimum for H1/H2-P0. Holm adjusts the p-values of all 12 tests. All 12 are significant in the predicted direction (Holm one-sided $p \leq 2.6\times10^{-3}$; eleven sit at the Monte-Carlo floor). These p-values assume that tutorials are independent speakers. If one narrator recorded many tutorials, the effective number of clusters is smaller and the p-values are too small. The direction matches D1 for both hypotheses and both language pairs: with tutorials as clusters all three embeddings are significant in each cell (pre-registered verdict *replicated*, which counts significance, not size, and treats tutorials as independent speakers). Under voice clusters the verdict in each of the four cells is *not replicated* (see below; Table III). In Hindi–English the point estimates are comparable to D1 (D1 H1 d_z 0.19–0.27, AUC 0.57–0.58), with 2/3 and 3/3 embeddings reaching D1's smallest effect. In Bengali–English every *point estimate* falls below D1's smallest effect (0/3 for both hypotheses), though some 99.58% intervals still include it. There the direction matches, but the effect is not shown to reach D1's practical size.

TABLE III
H7 on D4 (frozen run, `h7-freeze`), with tutorials (MUCS speaker IDs) as clusters. All Holm one-sided $p < .05$ in the predicted direction, assuming tutorials are independent speakers; under the pre-registered voice clusters (6 Hindi, 3 Bengali) none is significant (Holm $p \geq 0.19$ Hindi, 0.88 Bengali), a test without power (§VI). "k/3" counts embeddings graded *supported* at D1's smallest effect (d_z 0.2, AUC 0.55). CIs are 99.58% BCa.

Pair	H	Estimate E1/E2/E3 (CI range)	supported/3
hi-en	H1	d_z 0.24 / 0.18 / 0.26 (.13–.31)	2/3
hi-en	H2-P0	AUC 0.56 / 0.56 / 0.58 (.54–.60)	3/3
bn-en	H1	d_z 0.16 / 0.12 / 0.15 (.05–.24)	0/3
bn-en	H2-P0	AUC 0.53 / 0.52 / 0.54 (.50–.57)	0/3

The pre-registered voice-cluster sensitivity analysis groups recordings that may share a narrator. Its outcome-blind threshold, calibrated on D1, collapses the 551 Hindi recordings to 6 clusters and the 307 Bengali recordings to 3. Under these clusters none of the 12 tests reaches significance (Holm one-sided $p = 0.19$ for five of the six Hindi tests, and 0.88 for the sixth and for all six Bengali tests). Taken at face value, the pre-registered rule would then label all four verdicts *not robust to speaker dependence*. With only 6 and 3 clusters, however, the test cannot pass: the smallest attainable Holm-adjusted p is $12/2^6 \approx 0.19$, already above .05. The non-significance therefore reflects a lack of power, not evidence against the effect, and we report the analysis as uninformative rather than apply that label. Without verified narrator identities we cannot tell how much of this collapse is over-merging by the threshold and how much is a small pool of narrators recording many tutorials. We keep the threshold fixed, since retuning it would break the pre-registration. Robustness to speaker dependence is therefore *untested* on D4, and the D4 result supports the direction of the effect, not its significance under realistic speaker dependence.

The pre-registered contamination audit of the native-script

lexicon drew 200 random native-tagged tokens per pair and labelled them with an LLM-based labeller. The AI agent that ran the analysis checked 50 per pair against it, and all 100 agreed. By these text labels, English makes up 0.5% of these tokens in Hindi–English (95% CI 0.1–2.8%) and 1.0% in Bengali–English (0.3–3.6%). Reading the other 150 Bengali items, outside the pre-registered check, the agent found four more English words the labeller had missed: "column" and three English stems with Bengali endings (e.g. "line" with a genitive). Counting them gives 3.0% (1.4–6.4%), probably the fairer reading for Bengali. Neither check listens to the audio, and we did not quantify how residual mislabelling of this size affects the D4 estimates. The one change to code frozen for D4, a crash fix in a descriptive summary made before any D4 result existed, changes no D1 number and no primary D4 result (deviation 2).

VII. Mitigations

H4 asks whether M1 and M3 lower the switch-point excess of P0 with E3, compared with the recalibrated baseline B0, on the 15 scored D1 channels (§IV-D). Support needs Holm $p < .05$ and a reduction of at least 25%. The test ran once, from the frozen code (tag `h4-freeze`, commit `cd22caf`) and inputs regenerated with that code and re-pinned after a compute-host loss (deviation 6). An earlier start was cut off by a second host loss before it wrote any output (deviation 13). On these channels B0's excess is $+2.13$ pp, so the smallest effect of interest is a reduction of 0.53 pp. Neither mitigation is supported (Table IV). M1 lowers the excess by 0.40 pp (18.9%) and M3 by 0.53 pp (24.9%). Both are *inconclusive*: their intervals include no reduction at all and are too wide to rule out a reduction of the smallest effect of interest. M3's point estimate falls just short of the smallest effect of interest (24.9% against 25%), and its per-channel changes vary more than M1's (from -11.3 to $+4.1$ pp). In secondary, unadjusted comparisons, the language-aware score offset B2, which uses predicted window languages, lowers the excess by 0.59 pp ($p = .10$, itself not significant), about as much as either mitigation (M1 $-$ B2: $+0.19$ pp, $p = .67$; M3 $-$ B2: $+0.06$ pp, $p = .54$). Like M2, B2 can lower the switch-point fire rate at no cost visible on D1, so this comparison is biased against the mitigations, and neither B2 nor the mitigations is shown to help without H5. Language-wise centring B1 leaves it unchanged ($+0.09$ pp). H5 (no extra missed cross-lingual turns), H6 (the ordering) and the joint trade-off are not tested, for lack of conversation data (§III-C). These results therefore do not establish a working mitigation.

The pre-registered secondary analyses, all descriptive and unadjusted, help interpret this null. Linear probes on clean windows show that M1 removes much of the linearly decodable language information: language balanced accuracy is 0.76 for E3 and 0.62 after M1, while speaker identification stays at 0.95. Partly removing that information did not detectably remove the excess. M3, despite its gradient-reversal loss, makes the language *more* decodable (0.795–0.823 over its five seeds). It also improves verification on the H4 folds' clean windows, a different trial set from H3's (mono-language EER 0.118 for E3, 0.062–0.071 for M3), and closes the small cross-language EER gap. So M3 changed the embedding without making it language-invariant, and H4 is not a test of whether a language-invariant embedding would help. If the fitting folds are allowed to choose a larger language subspace for M1 ($k = 1$–8), the reduction grows to -0.62 pp (29%, unadjusted $p = .004$), but not significantly beyond M1's ($p = .18$), and the larger subspace leaves the language probe where M1 left it (0.62). The reduction is more than random subspaces of the same size give ($p = .008$), but not clearly more than the top principal directions give ($p = .28$), so it is unclear that the reduction is specific to language. In the pre-registered sensitivity subsets, M1's reduction is of similar size (purity subset -0.41 pp, $p = .02$; alignment filter -0.43 pp, $p = .045$), while M3's vanishes ($+0.80$ and $+0.20$ pp).

TABLE IV
H4 ON D1 (FROZEN RUN): CHANGE IN THE CELL-STANDARDISED P0L1 ΔFAR AGAINST B0 ($+2.13$ PP) OVER THE 15 SCORED CHANNELS; M3 AVERAGED OVER 5 SEEDS PER FOLD. EXACT ONE-SIDED SIGN-FLIP OVER CHANNELS, p-VALUES HOLM-ADJUSTED OVER M1–M3; BCA CIS AT 98.3%.

System	Change (pp)	CI (pp)	Holm p	Outcome
M1	-0.40 (18.9%)	-0.98 to $+0.17$	0.20	inconclusive
M2	—	—	1	not tested
M3	-0.53 (24.9%)	-3.89 to $+0.74$	0.70	inconclusive

M3's secondary variants ran with one seed each (seed 0), so they carry seed noise. The five seeds of the primary configuration alone range from -1.05 to -0.16 pp (49% to 7%; standard deviation of the seed means 0.41 pp), and seed 0 is near the strong end (-0.90 pp). Without distillation (weight 0), M3 raises the excess ($+0.64$ pp; $+1.54$ pp against seed 0, 95% CI $+0.53$ to $+3.31$), and the weights 0.1 and 1 lower it by 0.31 and 0.21 pp. Dropping the gradient-reversal loss keeps the reduction (-1.03 pp; -0.12 pp against seed 0, CI -0.96 to $+0.94$). Dropping it together with the supervised-contrastive loss removes the reduction ($+0.36$ pp; $+1.26$ pp against seed 0, CI $+0.39$ to $+3.01$). Dropping only the contrastive loss or only the IndicVoices pool leaves -0.24 and 0.00 pp. Within this noise, the language-adversarial loss does not seem to be what produces M3's small reduction, which fits the probe result above.

On the two held-out test channels, B0's excess is larger, $+7.22$ pp, and neither mitigation lowers it consistently. These results are descriptive only: every system was fitted on all 15 train channels, with M3 as the five all-data models. M3 changes the excess by -0.56 pp on average (from -1.88 to $+1.06$ pp over its seeds), and M1 raises it by 2.91 pp. M3 again improves verification (mono-language EER 0.072–0.103 against 0.172 for E3) without lowering the language probe's accuracy (0.814–0.870 against 0.803).

As a cheap feature-level pre-check, we applied M1 and a language-centring baseline to the transparent P0 detector on the pilot channels, with the language direction estimated leave-

TABLE V

EXPLORATORY FULL-PIPELINE CHECK (POST HOC, NOT PRE-REGISTERED): SHARE OF BOUNDARIES AT WHICH THE PIPELINE REPORTS A SPEAKER CHANGE WITHIN ± 0.5 S (300 PER ROW, 17 CHANNELS). FOR ONE SPEAKER THIS IS A FALSE CHANGE; FOR TWO SPEAKERS, ONE MINUS IT IS THE MISS RATE. JOINS ARE ARTIFICIAL BOUNDARIES. RATES ARE POOLED OVER BOUNDARIES; THE DIFFERENCES IN THE TEXT ARE MEANS OF PER-CHANNEL DIFFERENCES.

Boundary	Speakers	Community-1	DiariZen
Natural switch (SS-DL)	one	1.3%	0.3%
Natural same-language control	one	0.3%	0.3%
Join, one video, same language	one	1.7%	3.3%
Join, two channels, same language	two	60.3%	94.0%
Join, two channels, language change	two	65.3%	96.0%

one-channel-out. There the projection did *not* reduce the p0L1 ΔFAR, which stayed flat or rose slightly. On 3 pilot channels and without a test, this suggested that removing a single global language direction from the embedding is not enough by itself to remove the switch-point excess. The confirmatory test above, on 15 other channels with the direction fitted fold-wise, agrees: M1's reduction is small and not significant.

VIII. EXPLORATORY FULL-PIPELINE CHECK (POST HOC)

After all pre-registered analyses were complete, we ran two off-the-shelf diarization pipelines as released, with their default settings and no given number of speakers: pyannote Community-1 (revision `3533c8cf`, its own VBx clustering [13]) and DiariZen [12] (model `diarizen-wavlm-large-s80-md`). This check was not pre-registered, so its tests are exploratory and unadjusted. It is not the planned P1-AHC variant, whose threshold was to be tuned on conversation data (§III-C).

On the 17 confirmatory channels we drew 300 natural `p0L1` switch points, in proportion to each channel's count, and one same-cell control for each. Each pipeline ran on the whole clip that holds the boundary. Because D1 has no speaker changes, we built artificial ones: 300 joins of a clip from one channel to a clip from another with the same language at the join, and 300 with a language change. As artificial same-speaker boundaries, we also joined 300 pairs of consecutive clips from one video, with the same language at the join. Every side of a join ends or starts with at least 1 s of its language. A join puts two separately recorded segments end to end, so it also carries a recording cut: it tests whether a real speaker change is found, not natural turn-taking. A boundary counts as a speaker change when the pipeline's output switches to a different speaker within ± 0.5 s; silence in between does not count.

Neither pipeline reported a speaker change at natural switch points significantly more often than at their controls (Table V). The mean per-channel differences are $+1.2$ pp for Community-1 and -0.4 pp for DiariZen (two-sided exact sign-flip $p = .31$ and 1.0 over 17 channels). Both rates are close to zero, so the change-score excess of Table II did not appear as a detectable excess of false speaker changes in these two pipelines. The rates rest on 4, 1, 1 and 1 events in 300, and the per-channel differences have 95% BCa intervals of -0.8 to $+3.6$ pp (Community-1) and -3.4 to $+0.8$ pp (DiariZen). Community-1 also missed 35–40% of the artificial two-speaker changes in these short files, so its near-zero rate says little about a subtle effect; DiariZen, which found 94–96% of them, gives the more informative null. Community-1 missed fewer of them when the language also changed (mean per-channel difference -9.0 pp, two-sided $p = .041$, unadjusted; -5.0 pp in the pooled rates); for DiariZen the difference was -1.5 pp ($p = .29$). For DiariZen, same-speaker joins drew more false changes than natural controls ($+6.0$ pp per channel, $p = .031$), as a recording cut would. These tests also treat a channel as one speaker (§III). The diarization error rates and per-channel values are in the repository.

TABLE VI

THE PRE-REGISTERED TESTS AND WHAT BECAME OF THEM.

Test	Question	Status and outcome
H1	Same-speaker similarity lower across a switch	Run (§V): supported for E1, E3; significant, below the SESOI for E2
H2-P0	Change-score excess at switch points	Run in a cell chosen after the pilot: supported for E1–E3; no excess over all switches
H2-P1/P2	The excess in full diarization pipelines	Not run; post hoc check only (§VIII)
H3	Cross-language same-speaker scores lower	Run: as for H1
H4	Mitigations reduce the excess	M1 and M3 inconclusive; M2 not testable on D1 (§VII)
H5, H6	Missed DS-DL turns; ordering of the mitigations	Not run (§III-C)
H7	Same direction on Hindi/Bengali–English	Run (§VI): replicated with tutorials as clusters; uninformative under voice clusters

IX. DISCUSSION

Table VI summarises what became of each pre-registered test.

On real Nepali–English speech, same-speaker embedding similarity is lower across a language switch (H1), and cross-language same-speaker scores are lower (H3). This confirms, at natural switch points, the cross-language shift known from verification [1], [3]. For all three embeddings, H1 survives the pre-registered acoustic and pause controls, and H3 agrees in direction. The shift is therefore not explained by the measured covariates, although unmeasured ones cannot be excluded. It is small: standardised effects are ≈ 0.17–0.27, consistent with LASE's report of a reduced cross-script gap for synthetic Indian-accented voices [3]. For the ResNet embedding E2 both effects are significant with point estimates below our smallest effect of interest, a value their intervals still include. Relative to matched controls, same-speaker cosine drops by 0.037/0.029/0.034 at a switch (E1/E2/E3; H1's channel-mean drop, the numerator of d_z). For the ECAPA-TDNN E1 this is close to LASE's off-the-shelf gap for Indian-accented voices (0.044) and well below that for Western-accented voices (0.105); for the WavLM-based E3 it lies between LASE's WavLM-SV gaps (0.006 and 0.082). LASE's gaps are utterance-level, on synthetic voices, and ours come

from 1 s windows of real speech, so the comparison is only indicative.

The change score shows a narrower picture. It is higher at switches only where both language runs last at least a second: in the primary cell (AUC 0.57–0.58; covariate-robust for E2 and E3, switch-associated for E1) and in the ≥ 1 s stratum of the pooled cell (exploratory). The operating-point excess in the primary cell is $+2.5$ to $+3.0$ pp averaged over channels (for E1, $+1.2$ pp without its smallest channel; §V), and $+0.8$ to $+2.0$ pp averaged over switch points. Averaged over all switches, there is no excess (pooled AUC ≈ 0.49). Most switches in these lectures are insertion-like [6]: in the pooled cell, 79% of the 120,630 analysed switch points border a run shorter than 0.5 s, too short for a 1 s detector to resolve. The short-run stratum has point estimates below 0.5, which is exploratory and untested. Both supported claims, H1's and H2-P0's, are therefore conditional on language runs of at least a second.

The pre-registered tests of whether this reaches diarization output could not be run. In the exploratory check (§VIII), two off-the-shelf pipelines rarely reported a speaker change at natural switches, and not significantly more often than at matched controls; that check used short clips and artificial speaker changes. Whether the same holds in long-form conversations, and whether a lower false-alarm rate at switches would cost missed real speaker changes, still needs conversations with speaker and language references. Nor did the pre-registered mitigations demonstrably remove the excess. The point estimates for projecting out the language direction and for adversarial fine-tuning were reductions of a fifth to a quarter, but both intervals include no reduction, and neither exceeded that of a language-aware score offset [1], which was itself not significant and is favoured on D1 (§VII). Because M3 did not become language-invariant, whether invariance itself would help remains open.

Limitations. Without the pre-registered pipeline tests, whose only stand-in is the post hoc check on clip joins, the results mainly concern embedding and change-score sensitivity. The design is observational, and covariate adjustment covers only the measured covariates. D1's `speaker_id` is a YouTube channel, not a verified identity. The embedding-based purity audit and a single-rater listening check only partly address this. The channel-level tests assume that the 17 channels are independent speakers. MUCS speaker IDs are tutorials, so the D4 tests assume, without verification, that tutorials are independent speakers. We have no human-verified evaluation subset with checked speaker continuity, audible switches and boundary timing. One is prepared for two independent bilingual raters, with its analysis fixed in advance, but not yet labelled, so the evidence here is preliminary. The listening checks had one rater, the author, who knew the hypotheses, and the D4 language labels were checked as text by LLMs, not against the audio. By the listening check, about 6% of primary-cell switch points carry no audible switch. D1's transcripts are mostly machine-generated, and the pre-registered measurement of tag noise on its 777 human-verified clips was not run (deviation 16). Both corpora are instructional monologues (STEM lectures; narrated tutorials), and we have no speaker metadata such as gender; switching in conversation, where diarization matters most, may differ in frequency, run length and prosody. The H4 supplement fixed no power analysis, and its intervals are wider than its smallest effect of interest, so with 15 channels the test could not separate a 25% reduction from none. M3 was trained on real speech only. This avoids the synthetic-to-real mismatch that Li et al. suggest may hurt when real data are plentiful [2], and which LASE, trained and tested on TTS voices only, does not measure. The cost is fewer cross-language training pairs.

X. Conclusion

Within one speaker and between language runs of at least a second, three speaker embeddings rate the same voice as slightly less similar across a natural Nepali–English switch, and a two-window change score is slightly higher there; averaged over all switches there is no change-score excess. None of these results reverses when any one channel is left out. The two mitigations we could test reduced that excess inconclusively. The evidence is preliminary: channels stand in for speakers, and no independent listener has yet checked the switch points. Whether the excess reaches diarization output was not tested as planned; in a post hoc check, two off-the-shelf pipelines rarely reported a false speaker change at switches. Testing it needs long-form conversations with speaker and language references.

XI. Ethics and Reproducibility

The study uses real recorded speech only and is a non-commercial project. D1 is used as released on Hugging Face (CC BY-NC 4.0, revision `dd00ca41`) [20] and MUCS 2021 as released on OpenSLR (resource 104, CC BY-SA 4.0); M3's Nepali speaker pool is the Nepali part of IndicVoices (CC BY 4.0, gated access, revision `c96f9088`). Only the released clips were used: the planned download of D1's long-form source videos failed (§III-C). No audio is redistributed. Code, configs, pre-registration documents, the decision and deviation logs, result files, seeds and data revisions are in the repository github.com/ishangautam7/nepali-cs-diarization, public from the date this version was posted; its `REPRODUCE.md` maps every number in this paper to its result file and command. It is a release copy of the development repository, without some planning notes and the LLM review records; the development repository, which holds the history cited below, is kept unchanged and is available to reviewers and editors on request. In it, the freezes are the git tags `m2a-freeze` (`11eb77c`), `h7-freeze` (`a68e5b1`) and `h4-freeze` (`cd22caf`). Each confirmatory result file records its freeze tag and commit. The freeze records, in both repositories, give the SHA-256 hash of every frozen file and of the few files changed after a freeze, so the released files can be checked against them. The commit graph fixes the order of the decisions: `e430e1e`, which named the primary cell, is an ancestor of the pre-registration commit `bd60821`, which

is an ancestor of the freeze `11eb77c`. By the author's clock they were committed at 15:31, 16:03 and 18:12 Nepal time (NPT, UTC+5:45) on 2026-10-18, and the run log starts the one confirmatory run at 18:15 NPT. Commit and tag times are set by the author's machine and the tags are unsigned, so neither independently proves when a decision was made; readers should check the commit hashes given here rather than the tag names. The pre-registration was not deposited with an external registry. GitHub's own records, which the author cannot set, show the freeze commits merged in the development repository's pull request #2 at 12:29 UTC (18:14 NPT) on 2026-10-18 and the confirmatory results merged in pull request #3 at 13:01 UTC (18:46 NPT). This shows that the frozen plan reached the repository before the results did, though not when the run itself was made. The post hoc analyses, added after all pre-registered results in response to comments on drafts of this paper (deviations 14 and 15), are the pipeline check, the exact sample counts, the leave-one-channel-out check and a reconciliation of Fig. 1 with an earlier, point-weighted draft of it. Speaker embeddings are biometric data, so we report only aggregate statistics and release no per-speaker embeddings. No ethics-board review was sought: the study uses only publicly released recordings, makes no new recordings and recruits no participants (the listening checks were done by the author).

Use of AI tools. An AI coding agent (Kiro, using Anthropic Claude models) wrote the analysis code, ran the pipelines and drafted this text under the author's direction. LLM-based labellers labelled the D4 lexicon and the contamination-audit sample, and the agent checked those labels as text (§III, §VI). Separate LLM reviews of the pilot, of the design and code before each freeze, and of drafts of this paper led to design and wording changes, including the choice of the primary cell (§IV); their records are available from the author on request. The author directed the work and is responsible for all of its content.

Conflicts of Interest

The author declares no conflicts of interest.

References

[1] J. Thienpondt, B. Desplanques, and K. Demuynck, "Tackling the score shift in cross-lingual speaker verification by exploiting language information," in *Proc. IEEE ICASSP*, 2022, arXiv:2110.09150.

[2] Z. Li, X. Miao, J. Liu, and M. Li, "Language-invariant multilingual speaker verification for the TidyVoice 2026 challenge," 2026, arXiv:2603.08092.

[3] V. P. T. Menta, "LASE: Language-adversarial speaker encoding for Indic cross-script identity preservation," 2026, arXiv:2605.00777.

[4] S. Baghel *et al.*, "DISPLACE challenge: DIarization of SPeaker and LAnguage in conversational environments," in *Proc. Interspeech*, 2023, arXiv:2303.00830.

[5] S. Poplack, "Sometimes I'll start a sentence in Spanish Y TERMINO EN ESPAÑOL: Toward a typology of code-switching," *Linguistics*, vol. 18, no. 7–8, pp. 581–618, 1980.

[6] P. Muysken, *Bilingual Speech: A Typology of Code-Mixing*. Cambridge, UK: Cambridge University Press, 2000.

[7] A. S. Doğruöz, S. Sitaram, B. E. Bullock, and A. J. Toribio, "A survey of code-switching: Linguistic and social perspectives for language technologies," in *Proc. ACL-IJCNLP*, 2021, pp. 1654–1666.

[8] B. Gambäck and A. Das, "Comparing the level of code-switching in corpora," in *Proc. LREC*, 2016, pp. 1850–1855.

[9] D. Raj, D. Snyder, D. Povey, and S. Khudanpur, "Probing the information encoded in X-vectors," in *Proc. IEEE ASRU*, 2019, pp. 726–733, arXiv:1909.06351.

[10] N. Hosseini-Kivanani, "Simple language normalization wins: Cross-lingual speaker verification for the TidyVoice 2026 challenge," 2026, arXiv:2607.22923.

[11] A. Plaquet and H. Bredin, "Powerset multi-class cross entropy loss for neural speaker diarization," in *Proc. Interspeech*, 2023.

[12] J. Han, F. Landini, J. Rohdin, A. Silnova, M. Diez, and L. Burget, "Leveraging self-supervised learning for speaker diarization," in *Proc. IEEE ICASSP*, 2025, arXiv:2409.09408.

[13] F. Landini, J. Profant, M. Diez, and L. Burget, "Bayesian HMM clustering of x-vector sequences (VBx) in speaker diarization: Theory, implementation and analysis on standard tasks," *Computer Speech & Language*, vol. 71, p. 101254, 2022, arXiv:2012.14952.

[14] F. Landini, M. Diez, T. Stafylakis, and L. Burget, "DiaPer: End-to-end neural diarization with Perceiver-based attractors," *IEEE/ACM Trans. Audio, Speech, Language Process.*, 2024, arXiv:2312.04324.

[15] S. B. Kalluri *et al.*, "The second DISPLACE challenge: DIarization of SPeaker and LAnguage in conversational environments," in *Proc. Interspeech*, 2024, arXiv:2406.09494.

[16] Dhanya E, A. Meena, M. Nanivadekar *et al.*, "Benchmarking speech systems for frontline health conversations: The DISPLACE-M challenge," 2026, arXiv:2603.02813.

[17] S. Barahona, L. Herrera-Alarcón, J. I. Alvarez-Trejos, and A. Lozano-Diez, "Adapting speaker diarization to code-switched medical conversations: AUDIAS-UAM at the DISPLACE-M challenge," in *Proc. Odyssey*, 2026, pp. 75–82.

[18] S. Neupane, S. Pokhrel, S. Pyakurel, and B. Joshi, "Neural speaker diarization via multilingual training: Evaluation on low-resource Nepali-Hindi speech," 2026, arXiv:2606.26144.

[19] J. Mishra and S. R. M. Prasanna, "Spoken language change detection inspired by speaker change detection," 2023, arXiv:2302.05265.

[20] S. Dahal, "Nepali–English code-switched ASR (dataset, v2)," 2026, Hugging Face dataset saileshbro/nepali-cs-asr, revision dd00ca41. [Online]. Available: https://huggingface.co/datasets/saileshbro/nepali-cs-asr

[21] A. Diwan *et al.*, "MUCS 2021: Multilingual and code-switching ASR challenges for low resource Indian languages," in *Proc. Interspeech*, 2021, arXiv:2104.00235.

[22] U. Hermjakob, J. May, and K. Knight, "Out-of-the-box universal romanization tool uroman," in *Proc. ACL, System Demonstrations*, 2018, pp. 13–18.

[23] V. Pratap *et al.*, "Scaling speech technology to 1,000+ languages," *J. Mach. Learn. Res.*, vol. 25, no. 97, pp. 1–52, 2024, arXiv:2305.13516.

[24] A. Radford *et al.*, "Robust speech recognition via large-scale weak supervision," in *Proc. ICML*, 2023, arXiv:2212.04356.

[25] Silero Team, "Silero VAD: Pre-trained enterprise-grade voice activity detector," https://github.com/snakers4/silero-vad, 2021.

[26] B. Desplanques, J. Thienpondt, and K. Demuynck, "ECAPA-TDNN: Emphasized channel attention, propagation and aggregation in TDNN based speaker verification," in *Proc. Interspeech*, 2020, arXiv:2005.07143.

[27] H. Wang *et al.*, "Wespeaker: A research and production oriented speaker embedding learning toolkit," in *Proc. IEEE ICASSP*, 2023, arXiv:2210.17016.

[28] S. Chen *et al.*, "WavLM: Large-scale self-supervised pre-training for full stack speech processing," *IEEE J. Sel. Topics Signal Process.*, vol. 16, no. 6, pp. 1505–1518, 2022, arXiv:2110.13900.

[29] J. Valk and T. Alumäe, "VoxLingua107: a dataset for spoken language recognition," in *Proc. IEEE SLT*, 2021, arXiv:2011.12998.

[30] Y. Ganin and V. Lempitsky, "Unsupervised domain adaptation by backpropagation," in *Proc. ICML*, 2015.

[31] T. Javed *et al.*, "IndicVoices: Towards building an inclusive multilingual speech dataset for Indian languages," in *Findings of ACL*, 2024, arXiv:2403.01926.

[32] J. Deng *et al.*, "ArcFace: Additive angular margin loss for deep face recognition," in *Proc. IEEE CVPR*, 2019.

[33] L. McInnes, J. Healy, and J. Melville, "UMAP: Uniform manifold approximation and projection for dimension reduction," 2018, arXiv:1802.03426.