

Cucumber Report

01-Apr-2024, 11:08:42 am

Start : Apr 01, 11:08:40.833 am

End : Apr 01, 11:08:40.966 am

Duration : 0.133 s

Features

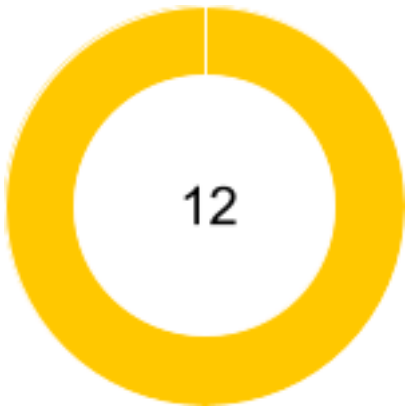
Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 3
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 12



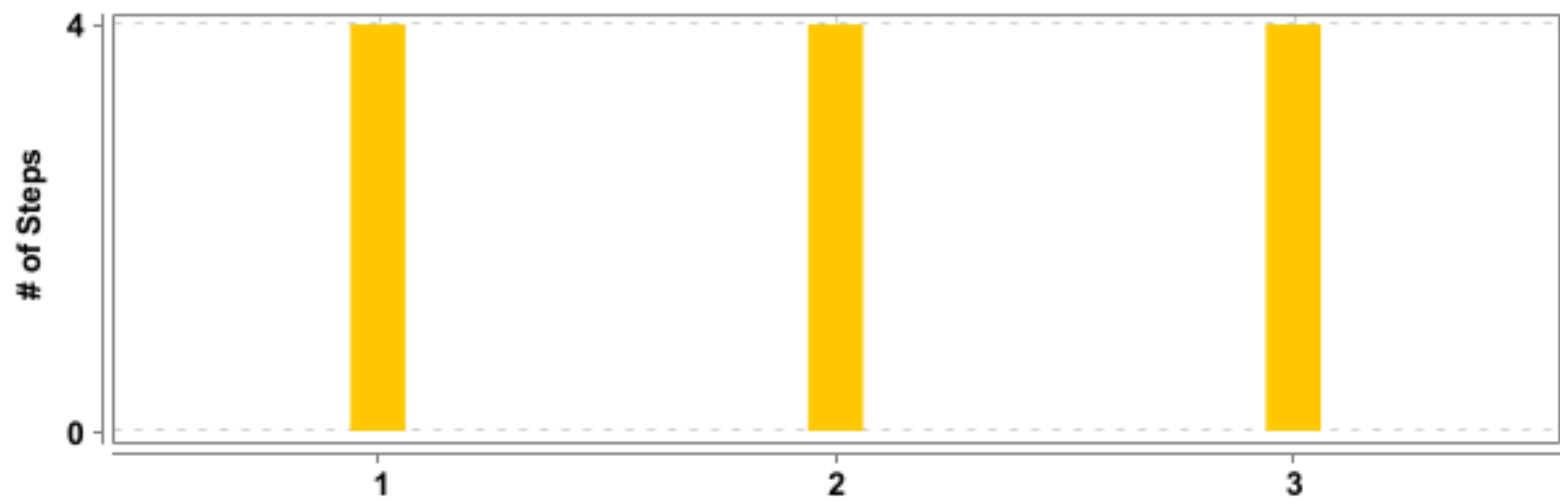
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login Functionality</u>	0.133 s	3	0	3	0	12	0	0	12

#	Feature Name	Scenario Name
1	<u>Login Functionality</u>	<u>User Login with invalid credential</u>
2		<u>User Login with invalid credential</u>
3		<u>User Login with invalid credential</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Login	3	0	3	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	Login Functionality	3	0	3	0	0.133 s

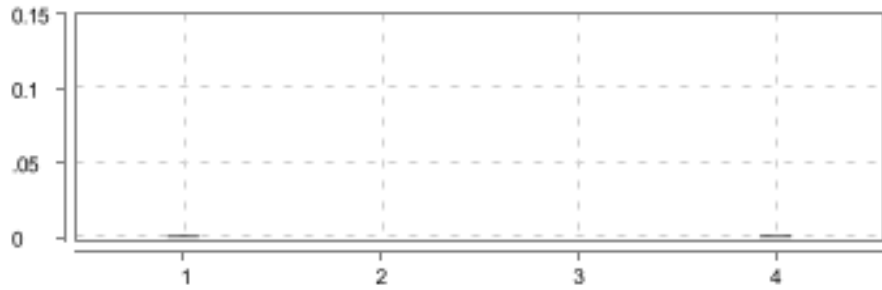



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login Functionality</u>	<u>User Login with invalid credential</u>	4	0	0	4	0.052 s
2		<u>User Login with invalid credential</u>	4	0	0	4	0.015 s
3		<u>User Login with invalid credential</u>	4	0	0	4	0.011 s

Login Functionality

FAILED	DURATION - 0.133 s	Scenarios		Steps	
/ 11:08:40.833 am // 11:08:40.966 am /		Total - 3		Total - 12	
		Pass - 0		Pass - 0	
		Fail - 3		Fail - 0	
		Skip - 0		Skip - 12	

User Login with invalid credential

<div>FAILED</div>	<div>DURATION - 0.052 s</div>		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 4</div>	
<div>/ 11:08:40.843 am // 11:08:40.895 am /</div>				
<div>Login Functionality</div>				
<div>@Login</div>				

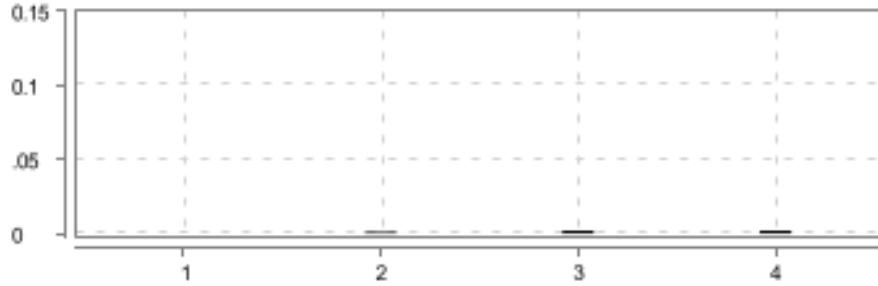

#	Step / Hook Details	Status	Duration
	<p>BEFORE - stepdefinitions.Hooks.setUp()</p> <p>io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p>	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52) </pre>		
1	Given User is on login page	SKIPPED	0.001 s
2	When User enters username as "standard_user" and password as "secret_sauce"	SKIPPED	0.000 s
3	And User click on login button	SKIPPED	0.000 s
4	Then User should be logged in successfully	SKIPPED	0.001 s
	AFTER - stepdefinitions.Hooks.tearDown()	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<p>io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52) </pre>		

User Login with invalid credential

FAILED	DURATION - 0.015 s		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	
/ 11:08:40.928 am // 11:08:40.943 am /				
Login Functionality				
@Login				

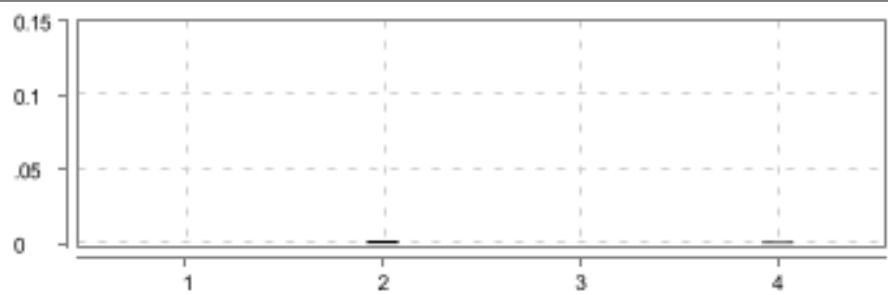

#	Step / Hook Details	Status	Duration
	<p>BEFORE - stepdefinitions.Hooks.setUp()</p> <pre> io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52) </pre>		
1	Given User is on login page	SKIPPED	0.000 s
2	When User enters username as "error_user" and password as "secret_sauce"	SKIPPED	0.001 s
3	And User click on login button	SKIPPED	0.002 s
4	Then User should be logged in successfully	SKIPPED	0.002 s

#	Step / Hook Details	Status	Duration
	<p>AFTER - stepdefinitions.Hooks.tearDown()</p> <p>io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52) </pre>		

User Login with invalid credential

FAILED	DURATION - 0.011 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 4</div>	
/ 11:08:40.955 am // 11:08:40.966 am /				
Login Functionality				
@Login				

#	Step / Hook Details	Status	Duration
	<p>BEFORE - stepdefinitions.Hooks.setUp()</p> <pre> io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397) at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52) </pre>		
1	Given User is on login page	SKIPPED	0.000 s
2	When User enters username as "problem_user" and password as "secret_sauce"	SKIPPED	0.002 s
3	And User click on login button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	Then User should be logged in successfully	SKIPPED	0.001 s
	<p>AFTER - stepdefinitions.Hooks.tearDown()</p> <p>io.cucumber.core.exception.CucumberException: class stepdefinitions.Hooks does not have a public zero-argument constructor. To use dependency injection add an other ObjectFactory implementation such as: * cucumber-picocontainer * cucumber-spring * cucumber-jakarta-cdi * ...etc</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:57) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:228) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:63) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:961) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:201) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:819) at org.testng.TestRunner.run(TestRunner.java:619) at org.testng.SuiteRunner.runTest(SuiteRunner.java:443) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre>at org.testng.SuiteRunner.run(SuiteRunner.java:336) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1301) at org.testng.TestNG.runSuitesLocally(TestNG.java:1228) at org.testng.TestNG.runSuites(TestNG.java:1134) at org.testng.TestNG.run(TestNG.java:1101) at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66) at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:105) Caused by: java.lang.NoSuchMethodException: stepdefinitions.Hooks.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:52)</pre>		