

# Contents

|                                                        |          |
|--------------------------------------------------------|----------|
| <b>Object Oriented Programming Languages</b>           | <b>2</b> |
| Complete Topic List                                    | 2        |
| Chapter Files                                          | 2        |
| 1.1 Classes and Objects, Instantiation                 | 2        |
| 1.2 Comparing and Copying Objects                      | 13       |
| 1.3 Testing                                            | 19       |
| Cheat-Sheet                                            | 21       |
| Review Checklist                                       | 21       |
| 2.1 Encapsulation                                      | 22       |
| 2.2 Members (Fields and Methods)                       | 24       |
| 2.3 Constructors                                       | 28       |
| 2.4 Information Hiding and Visibility Modifiers        | 32       |
| Cheat-Sheet                                            | 42       |
| Review Checklist                                       | 42       |
| 3.1 Overloading                                        | 43       |
| 3.2 Inheritance                                        | 46       |
| 3.3 Subtyping, Static and Dynamic Types, Type Checking | 51       |
| 3.4 Overriding and Dynamic Binding                     | 55       |
| 3.5 Interfaces                                         | 57       |
| 3.6 Generics                                           | 61       |
| 3.7 Subtype and Parametric Polymorphism                | 65       |
| Cheat-Sheet                                            | 67       |
| Review Checklist                                       | 67       |
| 4.1 Memory Management Overview                         | 68       |
| 4.2 Stack and Heap in OOP                              | 68       |
| 4.3 Garbage Collection                                 | 70       |
| 4.4 Manual Memory Management (C++)                     | 75       |
| 4.5 Object Lifecycle Summary                           | 77       |
| 4.6 Memory Management in Different Languages           | 80       |
| 4.7 Performance and Tuning                             | 82       |
| Practice Questions                                     | 83       |
| Solutions                                              | 84       |
| Cheat-Sheet                                            | 84       |
| Review Checklist                                       | 85       |
| 5.1 Packages and Compilation Units                     | 85       |
| 5.2 Access Control Across Packages                     | 87       |
| 5.3 Classpath and Build Systems                        | 89       |
| 5.4 Program Structure Principles                       | 91       |
| 5.5 Dependency Injection and IoC                       | 93       |
| 5.6 Program Structure Examples                         | 95       |
| 5.7 Compilation and Execution Process                  | 97       |
| 5.8 Best Practices and Anti-Patterns                   | 99       |
| Cheat-Sheet                                            | 100      |
| Edge Cases & Traps                                     | 100      |
| Practice Questions                                     | 102      |
| Solutions                                              | 103      |

## Object Oriented Programming Languages

### Complete Topic List

#### 1. Classes and Objects

- Classes and objects, instantiation
- Comparing and copying of objects
- Testing

#### 2. Encapsulation and Members

- Encapsulation, members, and constructors
- Instance and static members
- Information hiding and visibility modifiers

#### 3. Polymorphism and Type Systems

- Overloading
- Inheritance and multiple inheritance
- Subtyping, static and dynamic types, and type checking
- Overriding and dynamic binding
- Interfaces
- Generics
- Subtype and parametric polymorphism

#### 4. Memory Management

- Memory management and garbage collection

#### 5. Program Structure

- Program structure, packages, and compilation units

---

### Chapter Files

- chapters/chap1\_classes\_objects.md
- chapters/chap2\_encapsulation\_members.md
- chapters/chap3\_polymorphism\_types.md
- chapters/chap4\_memory\_management.md
- chapters/chap5\_program\_structure.md # Chapter 1: Classes and Objects

#### 1.1 Classes and Objects, Instantiation

##### Definition / Theoretical Background

**Class:** A blueprint or template that defines the structure and behavior of objects. It specifies: -  
**Fields** (attributes/properties): Data that objects store - **Methods** (behaviors): Operations that

objects can perform

**Object:** An instance of a class - a concrete entity created from the blueprint.

| Concept              | What It Is                 | Example                             |
|----------------------|----------------------------|-------------------------------------|
| <b>Class</b>         | Blueprint                  | <code>class Dog { ... }</code>      |
| <b>Object</b>        | Instance of class          | <code>Dog buddy = new Dog();</code> |
| <b>Instantiation</b> | Creating object from class | <code>new Dog()</code>              |
| <b>State</b>         | Values in object's fields  | <code>buddy.name = "Buddy"</code>   |
| <b>Identity</b>      | Unique identifier          | Each object has unique address      |
| <b>Behavior</b>      | Methods object can perform | <code>buddy.bark()</code>           |

### Class vs Object Visualization

| CLASS (Blueprint)       | OBJECT (Instance)     |
|-------------------------|-----------------------|
| +-----+                 | +-----+               |
| class Dog {             | Dog buddy = new Dog() |
| String name;            |                       |
| int age;                | name = "Buddy"        |
| void bark() { ... }     | age = 3               |
| }                       | bark()                |
|                         |                       |
| Doesn't exist in memory | Lives in HEAP memory  |
| +-----+                 | +-----+               |

You can create MANY objects from ONE class!

```
Dog buddy = new Dog();
Dog max = new Dog();
Dog charlie = new Dog();

+-----+
| name = "Buddy" |
| age = 3        |
+-----+
Dog max = new Dog();
+-----+
| name = "Max"   |
| age = 5        |
+-----+
Dog charlie = new Dog();
+-----+
| name = "Charlie" |
| age = 2          |
+-----+
```

### Declaration and Instantiation

```
// Class definition
class Dog {
    // Instance variables (fields)
```

```

String name;
int age;

// Constructor
Dog(String name, int age) {
    this.name = name;
    this.age = age;
}

// Methods
void bark() {
    System.out.println(name + " says Woof!");
}
}

// Instantiation and use
public class Main {
    public static void main(String[] args) {
        Dog buddy = new Dog("Buddy", 3); // Create object
        Dog max = new Dog("Max", 5);

        buddy.bark(); // "Buddy says Woof!"
        max.bark(); // "Max says Woof!"

        // Objects have independent state
        buddy.age = 4; // Only buddy's age changes
        System.out.println(max.age); // Still 5!
    }
}

```

## Java

```

# Class definition (Python)
class Dog:
    # Constructor (special method)
    def __init__(self, name, age):
        self.name = name # self refers to the object
        self.age = age

    def bark(self):
        print(f"{self.name} says Woof!")

# Instantiation
buddy = Dog("Buddy", 3)
max = Dog("Max", 5)

```

```
buddy.bark()  # "Buddy says Woof!"
max.bark()    # "Max says Woof!"
```

## Python

```
class Dog {
public:
    string name;    // Instance variables
    int age;

    // Constructor
    Dog(string name, int age) : name(name), age(age) {}

    void bark() {
        cout << name << " says Woof!" << endl;
    }
};

int main() {
    Dog* buddy = new Dog("Buddy", 3); // Heap allocation
    Dog max("Max", 5);                // Stack allocation

    buddy->bark(); // "Buddy says Woof!"
    max.bark();   // "Max says Woof!"

    delete buddy; // Don't forget to free heap memory!
}
```

## C++

### The new Keyword (Instantiation)

```
Dog buddy = new Dog(...);
```

**What new does:** 1. Allocates memory for the object (usually on the heap) 2. Initializes fields to default values (0, null, false) 3. Calls the constructor method 4. Returns a reference to the object

```
new Dog("Buddy", 3)
```

```

      |
      v
+-----+
| 1. Allocate memory (heap) |
| 2. Initialize fields:    |
|   name = null           |
|   age = 0                |
| 3. Call constructor:    |
|   name = "Buddy"        |
+-----+
```

```
|    age = 3                                |
| 4. Return reference (address)            |
+-----+
```

## Default Values

```
class Example {
    int num;           // Default: 0
    double decimal;    // Default: 0.0
    boolean flag;      // Default: false
    String text;       // Default: null
    int[] arr;         // Default: null
    Object obj;        // Default: null

    // Constructor to initialize
    Example() {
        num = 10;      // Now it's 10
        // text still null if not initialized
    }
}
```

## Default values table:

| Type                   | Default Value           |
|------------------------|-------------------------|
| byte, short, int, long | 0                       |
| float, double          | 0.0                     |
| char                   | '    ' (null character) |
| boolean                | false                   |
| Object reference       | null                    |

## Memory Where Objects Live

| STACK (local variables) | HEAP (objects) |
|-------------------------|----------------|
| +-----+                 | +-----+        |
| Dog buddy ----->        | Dog object     |
| (reference)             | name: "Buddy"  |
| +-----+                 | age: 3         |
|                         | +-----+        |

In Java, Python, C#: - **Objects live on the Heap** (managed memory) - **References live on the Stack** (variables point to heap)

In C++: - Objects can live on **Stack** (if declared locally) or **Heap** (if **new**)

## Edge Cases & Traps

### Trap 1: Reference vs Object Confusion

```

Dog d1 = new Dog("Buddy", 3);
Dog d2 = d1; // Copies REFERENCE, not object!

// Now d1 and d2 point to SAME object!
d2.name = "Max";
System.out.println(d1.name); // "Max"! Changed because same object!

// For independent copies, need to copy explicitly:
Dog d3 = new Dog(d1.name, d1.age); // Creates NEW object

```

### Trap 2: Null Reference

```

Dog d; // d is null (no object!)
d.bark(); // NullPointerException! Object doesn't exist!

// Must initialize first:
d = new Dog("Buddy", 3);
d.bark(); // Now works

```

### Trap 3: Uninitialized Fields

```

class Example {
    int x; // Default 0, not uninitialized garbage!
}
// x is 0, not random garbage
// Unlike C/C++ local variables!

```

### Trap 4: Class is a Type, Object is an Instance

```

Dog d = new Dog(); // Dog is type/class, d is instance
// You cannot do: new Dog.bark() (wrong!)
// Must: d.bark() (using object instance)

```

### Examples

```

class BankAccount {
    // Fields
    String accountNumber;
    String ownerName;
    double balance;

    // Constructor
    BankAccount(String accNum, String name, double initialBalance) {
        accountNumber = accNum;
        ownerName = name;
        balance = initialBalance;
    }

    // Methods

```

```

void deposit(double amount) {
    if (amount > 0) {
        balance += amount;
    }
}

void withdraw(double amount) {
    if (amount <= balance) {
        balance -= amount;
    } else {
        System.out.println("Insufficient funds!");
    }
}

void display() {
    System.out.println(ownerName + ": $" + balance);
}
}

public class Main {
    public static void main(String[] args) {
        BankAccount acc1 = new BankAccount("12345", "Alice", 1000);
        BankAccount acc2 = new BankAccount("67890", "Bob", 500);

        acc1.deposit(500);    // Alice: $1500
        acc2.withdraw(100);   // Bob: $400
        acc1.display();       // Alice: $1500.0
        acc2.display();       // Bob: $400.0

        // Each object has its OWN state
        System.out.println(acc1.balance); // 1500.0
        System.out.println(acc2.balance); // 400.0
    }
}

```

### Example 1: Bank Account Class

```

class Rectangle:
    def __init__(self, width, height):
        self.width = width
        self.height = height

    def area(self):
        return self.width * self.height

    def perimeter(self):

```



```

        return 2 * (self.width + self.height)

    def scale(self, factor):
        self.width *= factor
        self.height *= factor

# Create two rectangle objects
r1 = Rectangle(5, 3)
r2 = Rectangle(4, 2)

print(f"r1 area: {r1.area()}") # 15
print(f"r2 area: {r2.area()}") # 8

r1.scale(2) # Scale r1 by 2
print(f"r1 area after scale: {r1.area()}") # 60
print(f"r2 unchanged: {r2.area()}") # Still 8!

```

## Example 2: Rectangle Class

```

class Student {
    String name;
    int age;
    String major;

    // Constructor 1: Full
    Student(String name, int age, String major) {
        this.name = name;
        this.age = age;
        this.major = major;
    }

    // Constructor 2: Default major
    Student(String name, int age) {
        this.name = name;
        this.age = age;
        this.major = "Undeclared";
    }

    // Constructor 3: Default values
    Student() {
        this.name = "Unknown";
        this.age = 0;
        this.major = "Undeclared";
    }
}

```

```
// Usage
Student s1 = new Student("Alice", 20, "CS");           // Full
Student s2 = new Student("Bob", 19);                  // Default major
Student s3 = new Student();                            // All defaults
```

### Example 3: Constructor Overloading (Multiple Constructors)

#### The this Reference

The **this** keyword is a reference to the **current object** - the object on which the method is being called.

```
class Person {
    private String name;
    private int age;

    // this helps distinguish field from parameter
    Person(String name, int age) {
        this.name = name;    // this.name = field, name = parameter
        this.age = age;      // this.age = field, age = parameter
    }

    // this can be used to return the object itself (for chaining)
    Person setName(String name) {
        this.name = name;
        return this;    // Returns the same object
    }

    Person setAge(int age) {
        this.age = age;
        return this;
    }

    // Chain method calls
    public static void main(String[] args) {
        Person p = new Person("Alice", 20);
        p.setName("Bob").setAge(25);    // Method chaining!
    }
}
```

#### Common uses of this:

| Use                          | Example                     | When Needed                            |
|------------------------------|-----------------------------|----------------------------------------|
| Disambiguate field/parameter | <code>this.x = x</code>     | Parameter has same name as field       |
| Return current object        | <code>return this</code>    | For method chaining                    |
| Pass current object          | <code>callback(this)</code> | When object needs to reference itself  |
| Constructor chaining         | <code>this(args)</code>     | Call another constructor in same class |

this() for Constructor Chaining:

```
class Student {
    String name;
    int age;
    String major;

    // Chain to the full constructor
    Student(String name, int age) {
        this(name, age, "Undeclared"); // Calls Student(String, int, String)
    }

    Student(String name, int age, String major) {
        this.name = name;
        this.age = age;
        this.major = major;
    }
}
```

**Important Note:** this() must be the **first statement** in constructor!

## Immutability

An **immutable object** is an object whose state **cannot be changed** after creation.

```
// Immutable class example
final class Person {
    private final String name; // final = can't reassign
    private final int age;

    // No setters! Only getters and constructor
    Person(String name, int age) {
        this.name = name; // Can't change after construction
        this.age = age;
    }

    // Only getters, no setters
    public String getName() { return name; }
    public int getAge() { return age; }
}

// Usage
Person p = new Person("Alice", 25);
String n = p.getName(); // Can read, can't modify
// p.setAge(26); // ERROR! No setter method exists!
```

## Why Immutability Matters:

Benefits of Immutable Objects:

1. Thread-safe - No synchronization needed!

2. Cacheable - Can safely reuse instances
3. No defensive copies needed
4. Building blocks for reliable code

Examples of immutable types:

- String in Java
- int, double primitives
- LocalDate in Java 8
- tuple in Python

Creating Immutable Classes:

```
public final class ImmutablePoint {
    private final int x;
    private final int y;

    // No setters! Only constructor and getters
    public ImmutablePoint(int x, int y) {
        this.x = x;
        this.y = y;
    }

    public int getX() { return x; }
    public int getY() { return y; }

    // Returns NEW point, doesn't modify this
    public ImmutablePoint translate(int dx, int dy) {
        return new ImmutablePoint(x + dx, y + dy);
    }
}

// Usage
ImmutablePoint p1 = new ImmutablePoint(1, 2);
ImmutablePoint p2 = p1.translate(3, 4); // Creates NEW point, p1 unchanged
```

The Problem with Mutable Objects:

```
// Mutable version - problematic!
class MutablePoint {
    int x, y;
    MutablePoint(int x, int y) { this.x = x; this.y = y; }
    void setX(int x) { this.x = x; }
    void setY(int y) { this.y = y; }
}

// Problem: If stored in collection, can be modified from outside!
MutablePoint p = new MutablePoint(1, 2);
List<MutablePoint> points = new ArrayList<>();
points.add(p);
```

```
points.get(0).setX(999); // p.x is now 999! Original modified!
```

```
// Immutable version - safe!
```

```
ImmutablePoint p1 = new ImmutablePoint(1, 2);
```

```
points.add(p1);
```

```
// No way to modify p1 after creation!
```

---

## 1.2 Comparing and Copying Objects

### Comparing Objects

#### Reference Equality vs Value Equality

| Type                      | What It Checks        | Syntax                                 |
|---------------------------|-----------------------|----------------------------------------|
| <b>Reference equality</b> | Same memory location? | <code>==</code> in Java for references |
| <b>Value equality</b>     | Same content?         | <code>.equals()</code> in Java         |

```
String s1 = new String("hello");
```

```
String s2 = new String("hello");
```

```
// Reference comparison (are they the same object?)
```

```
System.out.println(s1 == s2); // false (different objects)
```

```
// Value comparison (do they have same content?)
```

```
System.out.println(s1.equals(s2)); // true (same content!)
```

```
// BUT: String literals are pooled!
```

```
String s3 = "hello";
```

```
String s4 = "hello";
```

```
System.out.println(s3 == s4); // true (same pooled object!)
```

```
System.out.println(s3.equals(s4)); // true (same content too)
```

```
class Point {  
    int x, y;  
    Point(int x, int y) { this.x = x; this.y = y; }  
}
```

```
Point p1 = new Point(1, 2);
```

```
Point p2 = new Point(1, 2);
```

```
System.out.println(p1 == p2); // false! Different objects!
```

```
System.out.println(p1.equals(p2)); // false! equals() inherited from Object  
// does reference comparison by default!
```

```
// You need to OVERRIDE equals()!
class Point {
    int x, y;
    Point(int x, int y) { this.x = x; this.y = y; }

    @Override
    public boolean equals(Object obj) {
        if (this == obj) return true; // Same reference
        if (!(obj instanceof Point)) return false;
        Point other = (Point) obj;
        return this.x == other.x && this.y == other.y;
    }
}
```

## Why == Doesn't Work for Value Comparison

```
# Python: == does VALUE comparison by default!
class Point:
    def __init__(self, x, y):
        self.x = x
        self.y = y

p1 = Point(1, 2)
p2 = Point(1, 2)
p3 = p1

print(p1 == p2) # True! (Python's == compares values by default)
print(p1 == p3) # True! (Same object, same value)

# is checks identity (like reference equality in Java)
print(p1 is p2) # False! Different objects
print(p1 is p3) # True! Same object
```

## Python Comparison

### Copying Objects

```
class Address {
    String city;
    Address(String city) { this.city = city; }
}

class Person {
    String name;
    Address address; // Reference type field!
}
```

```

    Person(String name, Address address) {
        this.name = name;
        this.address = address;
    }
}

// Original
Address addr = new Address("NYC");
Person original = new Person("Alice", addr);

// Shallow copy - copies reference, not object!
Person shallowCopy = original;
// shallowCopy.address points to SAME Address object as original!

// Deep copy - copies the referenced objects too!
Person deepCopy = new Person(original.name, new Address(original.address.city));
// deepCopy.address is a NEW object with same values!

```

## Shallow Copy vs Deep Copy

### Shallow vs Deep Copy Visualization

SHALLOW COPY:

```

original -----+
|               |
| address -----+ |
v               v v
[Address: NYC]    shallowCopy.address -- same object!

```

DEEP COPY:

```

original -----+
|               |
| address -----+ | (original.address)
v               | |
[Address: NYC]   | |
                | |
deepCopy.address -----+ |
|               |
v               v
[Address: NYC]    NEW COPY! Different object

```

```

class Person {
    String name;
    int age;

    // Regular constructor
    Person(String name, int age) {

```

```

        this.name = name;
        this.age = age;
    }

    // Copy constructor
    Person(Person other) {
        this.name = other.name;
        this.age = other.age;
    }
}

// Using copy constructor
Person original = new Person("Alice", 25);
Person copy = new Person(original); // Creates NEW object with same values!

```

## Copy Constructors

```

import copy

class Person:
    def __init__(self, name, address):
        self.name = name
        self.address = address # Could be object reference

# Original
p1 = Person("Alice", "NYC")

# Shallow copy - nested objects shared
p2 = copy.copy(p1)

# Deep copy - nested objects also copied
p3 = copy.deepcopy(p1)

# p1 and p2 are different objects, but their address field might be same object
# p3 is completely independent

```

## Python Copy Module

### Edge Cases & Traps

#### Trap 1: == on Objects Compares References, Not Values

```

String a = new String("test");
String b = new String("test");
if (a == b) { // FALSE! Different objects!
    // This block never executes!
}

```



```
if (a.equals(b)) { // TRUE! Same content!
    // This block executes!
}
```

[WARNING] **Professor Trap:** Always use `.equals()` for string value comparison!

### Trap 2: Mutable Default Arguments (Python)

```
# DANGER! This is a common Python trap!
class BadList:
    def __init__(self, items=[]): # Mutable default!
        self.items = items

lst1 = BadList()
lst1.items.append(1)

lst2 = BadList()
print(lst2.items) # [1]! Shared default list!

# CORRECT:
def __init__(self, items=None):
    if items is None:
        items = [] # Create new list each time
```

### Trap 3: Shallow Copy with Nested Objects

```
class Node {
    Node next;
    int value;
}

Node n1 = new Node();
n1.value = 1;
Node n2 = new Node();
n2.value = 2;
n1.next = n2;

// Shallow copy of n1
Node copy = new Node();
copy.value = n1.value;
copy.next = n1.next; // copy.next points to SAME n2!

// Now modifying n2 affects both original and copy!
```

### Trap 4: Forgetting to Override equals()

```
class Point {
    int x, y;
    // No equals() override!
}
```

```

Point p1 = new Point(1, 2);
Point p2 = new Point(1, 2);

// These are both false!
System.out.println(p1 == p2);      // false (different objects)
System.out.println(p1.equals(p2)); // false (inherited == checks references!)

```

[WARNING] **Professor Trap:** If you override equals(), also override hashCode() for Maps/Sets!

## Examples

```

class Point {
    private int x, y;

    public Point(int x, int y) {
        this.x = x;
        this.y = y;
    }

    @Override
    public boolean equals(Object obj) {
        if (this == obj) return true; // Same reference
        if (obj == null || getClass() != obj.getClass()) return false;
        Point other = (Point) obj;
        return x == other.x && y == other.y;
    }

    @Override
    public int hashCode() {
        return 31 * x + y; // Consistent with equals()
    }
}

// Now:
Point p1 = new Point(1, 2);
Point p2 = new Point(1, 2);
System.out.println(p1.equals(p2)); // true! Same values!
System.out.println(p1 == p2);      // false! Different objects!

```

## Example 1: Proper equals() Implementation

```

class Person implements Cloneable {
    String name;
    int age;
}

```

```

    Person(String name, int age) {
        this.name = name;
        this.age = age;
    }

    @Override
    protected Object clone() {
        return new Person(this.name, this.age); // Deep copy
    }
}

Person original = new Person("Alice", 25);
Person cloned = (Person) original.clone();

System.out.println(original == cloned); // false
System.out.println(original.name.equals(cloned.name)); // true

```

## Example 2: Clone Method

---

### 1.3 Testing

#### Testing Concepts

**Why test?** - Find bugs before users do - Verify functionality works correctly - Enable confident refactoring - Document expected behavior

#### Unit Testing Basics

```

// Simple unit test example (JUnit)
import org.junit.jupiter.api.Test;
import static org.junit.jupiter.api.Assertions.*;

class Calculator {
    int add(int a, int b) { return a + b; }
    int divide(int a, int b) {
        if (b == 0) throw new ArithmeticException("Division by zero");
        return a / b;
    }
}

class CalculatorTest {
    @Test
    void testAdd() {
        Calculator calc = new Calculator();
        assertEquals(5, calc.add(2, 3));
        assertEquals(0, calc.add(-1, 1));
    }
}

```

```

    }

    @Test
    void testDivide() {
        Calculator calc = new Calculator();
        assertEquals(2, calc.divide(10, 5));
    }

    @Test
    void testDivideByZero() {
        Calculator calc = new Calculator();
        assertThrows(ArithmeticException.class, () -> calc.divide(1, 0));
    }
}

```

## Testing Terminology

| Term                    | Meaning                                     |
|-------------------------|---------------------------------------------|
| <b>Unit test</b>        | Tests single method/class                   |
| <b>Integration test</b> | Tests multiple components together          |
| <b>Test fixture</b>     | Setup code before tests                     |
| <b>Assertion</b>        | Check that expected == actual               |
| <b>Mock</b>             | Fake object for testing dependencies        |
| <b>TDD</b>              | Test-Driven Development (write tests first) |

## White-Board Example: Testing OOP Concepts

Question: What is the output?

```

Dog d1 = new Dog("Buddy", 3);
Dog d2 = d1;           // What is d2?
d2.setAge(4);
System.out.println(d1.getAge());

```

Answer: 4

Explanation:

1. d1 created with age 3
2. d2 = d1 means d2 points to SAME object as d1
3. d2.setAge(4) modifies the shared object
4. d1.getAge() returns 4

This tests understanding of REFERENCE semantics!

## Practice Questions

**MCQ 1:** What does **new** do in Java? - A) Declares a new variable - B) Allocates memory and calls constructor - C) Copies an existing object - D) Deletes an object

**MCQ 2:** Two objects created with **new Dog()** and same values - what is **==**? - A) true - B) false - C) Depends on **equals()** method - D) Compile error

**MCQ 3:** What is shallow copy? - A) Copies all fields including references - B) Copies only primitive fields - C) Creates new referenced objects - D) Used for value types only

**Short Answer:** Explain why `String s1 = new String("hi") == String s2 = new String("hi")` returns false.

**Board Coding:** Write a class **Circle** with radius field, constructor, and method **getArea()**. Then write tests for it.

**Oral Explanation:** What's the difference between **==** and **.equals()** for objects? When would you use each?

## Solutions

**MCQ 1:** B) Allocates memory and calls constructor

**MCQ 2:** B) false - different objects in memory

**MCQ 3:** A) Copies all fields, but reference fields point to same objects

**Short Answer:** **new** creates a new object in heap memory. Even though both strings have content "hi", they are different objects at different memory locations, so **==** compares references (addresses) and returns false. Use **.equals()** for content comparison.

---

## Cheat-Sheet

| Concept              | Key Points                                              |
|----------------------|---------------------------------------------------------|
| <b>Class</b>         | Blueprint/template defining structure and behavior      |
| <b>Object</b>        | Instance of class, lives in heap memory                 |
| <b>Instantiation</b> | <code>new ClassName()</code> allocates and initializes  |
| <b>Constructor</b>   | Initializes new object, has same name as class          |
| <b>Reference</b>     | Variable that points to object in heap                  |
| <b>null</b>          | Reference pointing to nothing                           |
| <b>==</b>            | Compares references (memory addresses)                  |
| <b>equals()</b>      | Compares object values (override for custom comparison) |
| <b>Shallow copy</b>  | Copies object, shared references inside                 |
| <b>Deep copy</b>     | Copies object AND all nested objects                    |

## Review Checklist

- ☐ **Class vs Object:** Can you explain the difference?
- ☐ **Instantiation:** Do you understand what **new** does?

- ☐ **Reference semantics:** Can you trace reference assignments?
- ☐ **Comparison:** Do you know when to use `==` vs `equals()`?
- ☐ **Copying:** Can you explain shallow vs deep copy?
- ☐ **Testing:** Can you write basic unit tests? # Chapter 2: Encapsulation and Members


## 2.1 Encapsulation

### Definition / Theoretical Background

**Encapsulation** is the bundling of data (fields) and methods (behaviors) into a single unit (class), and restricting access to some of the object's internal components.

**Key Benefits:** 1. **Data hiding** - Hide internal implementation details 2. **Protection** - Prevent external code from corrupting state 3. **Modularity** - Objects are self-contained, independent units 4. **Flexibility** - Can change internal implementation without affecting users

### The Encapsulation Principle

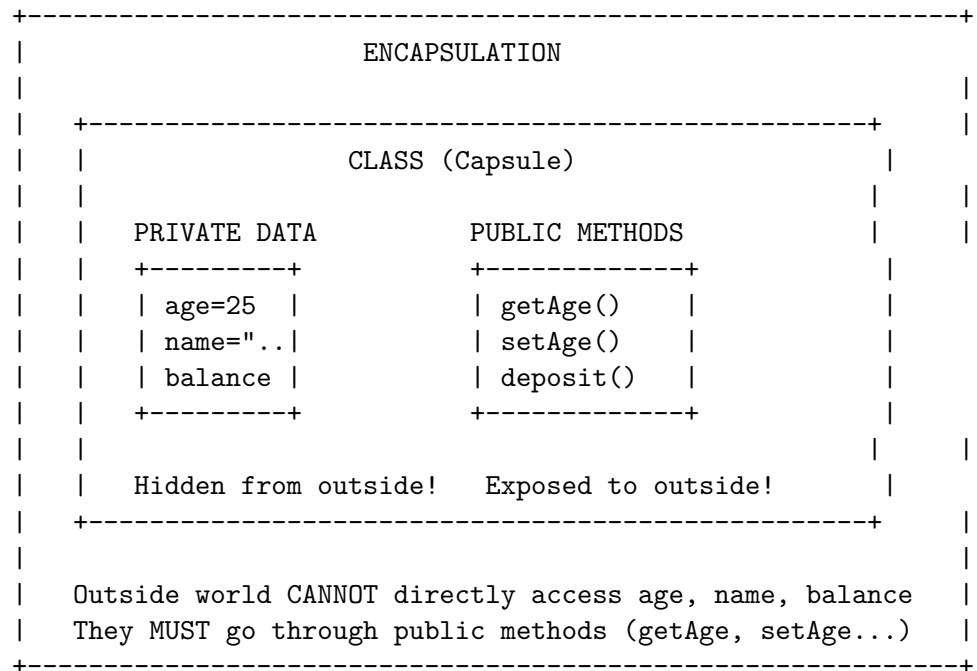

### Why Encapsulation Matters

```

// WITHOUT encapsulation (BAD!)
class BankAccountBad {
    double balance; // PUBLIC! Anyone can modify!

    BankAccountBad(double balance) {
        this.balance = balance; // No validation!
    }
}

```

```

// Anyone can do dangerous things:
account.balance = -1000000; // Negative balance! No validation!
account.balance = Double.MAX_VALUE; // Overflow possible!

// WITH encapsulation (GOOD!)
class BankAccountGood {
    private double balance; // PRIVATE!

    BankAccountGood(double initialBalance) {
        if (initialBalance < 0) {
            throw new IllegalArgumentException("Cannot be negative!");
        }
        this.balance = initialBalance;
    }

    public void deposit(double amount) {
        if (amount <= 0) {
            throw new IllegalArgumentException("Amount must be positive!");
        }
        balance += amount;
    }


    public void withdraw(double amount) {
        if (amount <= 0) {
            throw new IllegalArgumentException("Amount must be positive!");
        }
        if (amount > balance) {
            throw new IllegalArgumentException("Insufficient funds!");
        }
        balance -= amount;
    }

    public double getBalance() {
        return balance; // Read-only access (no setter!)
    }
}

// NOW: Balance is protected! All operations validated!
// account.balance = -1000000; // ERROR! Can't access private field!
// Must use: account.deposit() which validates!

```

## The Protective Barrier

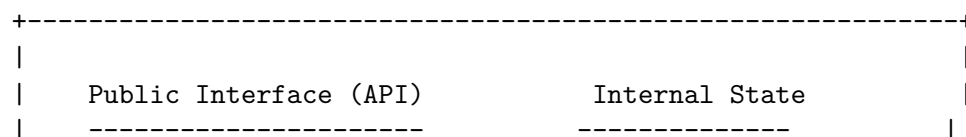

```

|   deposit(amount)           balance           |
|   withdraw(amount)         ----- transactions[] |
|   getBalance()             feeRate             |
|                               ...               |
|   +-----+               +-----+           |
|   |   VALIDATION HAPPENS HERE!           |       |
|   |   - Is amount positive?               |       |
|   |   - Is there sufficient balance?       |       |
|   |   - Does user have permission?         |       |
|   +-----+               +-----+           |
|   External code: CANNOT bypass these checks! |
+-----+

```

## 2.2 Members (Fields and Methods)

### Instance Members vs Static Members

| Aspect            | Instance Member              | Static Member      |
|-------------------|------------------------------|--------------------|
| <b>Belongs to</b> | Each object (instance)       | Class itself       |
| <b>Memory</b>     | Each object has its own copy | Single copy shared |
| <b>Access</b>     | object.member                | ClassName.member   |
| <b>Lifetime</b>   | As long as object exists     | Whole program      |
| <b>Keyword</b>    | (none)                       | static             |

### Instance Members

```

class Dog {
    String name; // Instance field - each Dog has its own name
    int age;     // Instance field - each Dog has its own age

    void bark() { // Instance method - operates on specific instance
        System.out.println(name + " says Woof!");
    }
}

Dog buddy = new Dog();
Dog max = new Dog();

buddy.name = "Buddy"; // buddy's name
max.name = "Max";     // max's name (independent!)

buddy.bark(); // "Buddy says Woof!" - operates on buddy
max.bark();   // "Max says Woof!" - operates on max

```



## Static Members

```
class Counter {
    private static int count = 0; // Static field - ONE copy for class
    private int instanceId;       // Instance field - one per object

    Counter() {
        instanceId = ++count; // Increment shared count
    }

    public static int getCount() { // Static method
        return count; // Can only access static members
    }

    public int getInstanceId() { // Instance method
        return instanceId; // Can access both static and instance
    }
}

Counter c1 = new Counter(); // instanceId=1, count=1
Counter c2 = new Counter(); // instanceId=2, count=2
Counter c3 = new Counter(); // instanceId=3, count=3

// All objects share the SAME count!
System.out.println(Counter.getCount()); // 3 (via class name)
// c1.getCount() also works but convention is ClassName.method()
```

## Static Field Memory Visualization

| STATIC (class-level) | HEAP (per object)  |
|----------------------|--------------------|
| +-----+              | +-----+            |
| Counter.count = 3    | Counter instance 1 |
| (shared by all!)     | instanceId = 1     |
| +-----+              | +-----+            |
| ^                    | +-----+            |
|                      | Counter instance 2 |
|                      | instanceId = 2     |
| +-----+              | +-----+            |
|                      | +-----+            |
|                      | Counter instance 3 |
|                      | instanceId = 3     |
|                      | +-----+            |

## When to Use Static?

```
// Use STATIC when:
// 1. Value is shared by ALL instances
class MathUtils {
```

```

    static final double PI = 3.14159; // Universal constant

    static int max(int a, int b) { // Utility method, no instance needed
        return a > b ? a : b;
    }
}

// Use INSTANCE when:
// 1. Each object needs its own copy
class Person {
    String name; // Each person has their own name
    int age;     // Each person has their own age
}

```

## Static Constants vs Instance Constants

```

class Circle {
    // Static constant - shared by all Circle objects
    static final double PI = 3.14159;

    // Instance field - each Circle has its own radius
    private double radius;

    public Circle(double radius) {
        this.radius = radius;
    }

    public double area() {
        // Can use static PI here
        return PI * radius * radius; // PI is shared constant
    }

    public double circumference() {
        return 2 * PI * radius;
    }
}

Circle c1 = new Circle(5);
Circle c2 = new Circle(10);

c1.area(); // Uses PI=3.14159, radius=5
c2.area(); // Uses PI=3.14159, radius=10
// Both use SAME PI value (one copy in memory)

```

## Edge Cases & Traps

### Trap 1: Static Method Can't Access Instance Members

```

class Example {
    int x = 10;    // Instance field

    static void printX() {
        System.out.println(x); // ERROR! Can't access instance field!
        // Because which x? There's no object context!
    }
}

```

[WARNING] **Professor Trap:** Static methods don't have this reference!

### Trap 2: Static vs Instance Method Confusion

```

class Example {
    static int count = 0;
    int instanceCount = 0;

    static void incrementStatic() {
        count++; // OK - static field
    }

    void incrementInstance() {
        instanceCount++; // OK - instance field
        count++; // OK - static field also accessible
    }
}

```

[WARNING] **Professor Trap:** Static can access static, instance can access both!

### Trap 3: Modifying Static from Instance Method

```

class Counter {
    static int count = 0;

    Counter() {
        count++; // All instances share same count!
    }
}

Counter c1 = new Counter(); // count = 1
Counter c2 = new Counter(); // count = 2
Counter c3 = new Counter(); // count = 3
// All three objects see same count = 3!

```

[WARNING] **Professor Trap:** Static fields are shared! All instances see same value!

### Trap 4: New vs Old Style Constants

```

// Java pre-5 style (still works but outdated)
class Constants {
    static final int MAX_SIZE = 100; // Uppercase with underscore
}

```

```

}

// Modern style: enum for related constants
enum Size { SMALL, MEDIUM, LARGE }

// Or: interface with constants (bad practice, but common)
interface Constants {
    int MAX_SIZE = 100; // Automatically static final!
}

```

---

## 2.3 Constructors

### Definition / Theoretical Background

A **constructor** is a special method that: 1. Has the **same name** as the class 2. Has **no return type** 3. Is called when creating new objects with **new** 4. Initializes the object's fields

### Types of Constructors

```

class Dog {
    String name;

    // Implicit default constructor (if no other constructor defined)
    // Dog() { } // Provided automatically if you define nothing

    // Explicit default constructor
    Dog() {
        name = "Unknown";
    }
}

Dog d = new Dog(); // Calls Dog()
System.out.println(d.name); // "Unknown"

```

### Default Constructor (No-Args)

```

class Dog {
    String name;
    int age;

    Dog(String name, int age) {
        this.name = name; // Initialize name
        this.age = age;   // Initialize age
    }
}

```

```
Dog buddy = new Dog("Buddy", 3); // Calls Dog(String, int)
```

## Parameterized Constructor

```
class Student {
    String name;
    int age;
    String major;

    // Constructor 1: Full
    Student(String name, int age, String major) {
        this.name = name;
        this.age = age;
        this.major = major;
    }

    // Constructor 2: Two params
    Student(String name, int age) {
        this.name = name;
        this.age = age;
        this.major = "Undeclared";
    }

    // Constructor 3: One param
    Student(String name) {
        this.name = name;
        this.age = 0;
        this.major = "Undeclared";
    }

    // Constructor 4: No params
    Student() {
        this.name = "Unknown";
        this.age = 0;
        this.major = "Undeclared";
    }
}

// Usage
Student s1 = new Student("Alice", 20, "CS");
Student s2 = new Student("Bob", 19);
Student s3 = new Student("Charlie");
Student s4 = new Student();
```

## Multiple Constructors (Constructor Overloading)

## Constructor Chaining with this()

```
class Student {
    String name;
    int age;
    String major;

    // This constructor calls the full one
    Student(String name, int age) {
        this(name, age, "Undeclared"); // Chain to 3-param constructor
    }

    // This constructor calls the 2-param one
    Student(String name) {
        this(name, 0); // Chain to 2-param constructor
    }

    // Full constructor (does actual work)
    Student(String name, int age, String major) {
        this.name = name;
        this.age = age;
        this.major = major;
    }
}
```

## Constructor vs Setter

```
// Constructor: Set once, at creation
class ImmutableStudent {
    private final String name;
    private final int age;

    ImmutableStudent(String name, int age) {
        this.name = name;
        this.age = age;
        // No setters! Values never change after creation
    }
}

// vs

// Setter: Can change at any time
class MutableStudent {
    private String name;
    private int age;

    public void setName(String name) { this.name = name; }
```

```

    public void setAge(int age) { this.age = age; }
}

// When to use which?
// - Constructor: Values known at creation, won't change (immutable)
// - Setter: Values may change during object lifetime (mutable)

```

## Private Constructor (Singleton Pattern)

```

class Singleton {
    private static Singleton instance;
    private String data;

    // Private constructor - can't call from outside!
    private Singleton() {
        data = "Important data";
    }

    // Only way to get instance
    public static Singleton getInstance() {
        if (instance == null) {
            instance = new Singleton(); // Create only once!
        }
        return instance;
    }
}

// Usage
Singleton s1 = Singleton.getInstance();
Singleton s2 = Singleton.getInstance();
System.out.println(s1 == s2); // TRUE! Same object!

```

## Edge Cases & Traps

### Trap 1: Forgetting to Initialize Fields

```

class Student {
    int age; // Default is 0, not uninitialized!

    // Student() { } // Default constructor, age = 0
}

// Student s = new Student();
// s.age is 0, not garbage!

```

[WARNING] **Professor Trap:** Default constructor gives default values, not garbage!

### Trap 2: Constructor Throwing Exception

```
class Bad {
    Resource resource;

    Bad() throws Exception {
        resource = new Resource();
        throw new Exception("Error!"); // Resource leaked!
    }
}

// If constructor throws, object is never fully created
// Destructor won't run!
// FIX: Use try-finally or RAII
```

### Trap 3: Calling Overridable Method in Constructor

```
class Parent {
    Parent() {
        doSomething(); // BAD! Could call overridden method!
    }

    void doSomething() {
        System.out.println("Parent");
    }
}

class Child extends Parent {
    int x = 5;

    @Override
    void doSomething() {
        System.out.println("Child: " + x); // x is 0 here! Not initialized yet!
    }
}

new Child(); // Prints "Child: 0" because child constructor hasn't run yet!
```

[WARNING] **Professor Trap:** Don't call overridable methods in constructors!

## 2.4 Information Hiding and Visibility Modifiers

### The Four Access Levels

| Modifier                         | Same Class | Same Package | Subclass | Anywhere |
|----------------------------------|------------|--------------|----------|----------|
| <b>private</b>                   | YES        | NO           | NO       | NO       |
| <b>default (package-private)</b> | YES        | YES          | NO       | NO       |
| <b>protected</b>                 | YES        | YES          | YES      | NO       |



| Modifier      | Same Class | Same Package | Subclass | Anywhere |
|---------------|------------|--------------|----------|----------|
| <b>public</b> | YES        | YES          | YES      | YES      |

```

+-----+
| public ----- Accessible EVERYWHERE |
|                                         |
| protected ----- Accessible within package AND subclasses |
|                                         |
| (default) ----- Accessible within package only |
|                                         |
| private ----- Accessible within class ONLY |
|                                         |
+-----+

```

## Java Access Modifiers

```
// public - accessible everywhere
public class PublicClass {
    public String name = "Everyone can see";

    public void publicMethod() { } // Accessible by anyone
}

// protected - accessible in package + subclasses
class PackageClass {
    protected String name = "Package + subclasses";
    protected void protectedMethod() { } // Accessible by subclass, package
}

// default (no modifier) - package-private
class DefaultClass {
    String name = "Only in my package"; // No modifier = package-private
    void defaultMethod() { } // Only same package
}

// private - accessible in class only
class PrivateClass {
    private String secret = "Only this class"; // Hidden!
    private void privateMethod() { } // Only this class

    // But private can be accessed by public methods of same class:
    public String getSecret() {
        return secret; // OK! Same class
    }
}
```

## Access Modifiers Visual

```
+-----+
| class MyClass {                                     |
| |                                                 |
| |     private int a = 1;    <--- Only MyClass can see |
| |     int b = 2;           <--- MyClass + same package |
| |     protected int c = 3; <--- MyClass + package + subclass |
| |     public int d = 4;     <--- EVERYONE               |
| |                                                 |
| |     public void method() {                     |
| |         System.out.println(a); // OK - same class   |
| |         System.out.println(b); // OK - same package |
| |         System.out.println(c); // OK - same package |
| |         System.out.println(d); // OK - everywhere  |
| |     }                                           |
| }                                                 |
+-----+
```

## Why Private is Protective

```
class BankAccount {
    private double balance; // Only accessible within this class!

    public void deposit(double amount) {
        if (amount <= 0) {
            throw new IllegalArgumentException("Invalid amount");
        }
        balance += amount; // OK - within class
    }

    public double getBalance() {
        return balance; // Controlled access!
    }
}

// Outside code CANNOT do:
// account.balance = -1000; // ERROR! Private!

// Must use:
// account.deposit(-1000); // But deposit validates!
```

## Python Naming Conventions (Analogous to Access Control)

```
class Person:
    def __init__(self, name):
        self.public_name = name # public - accessible everywhere
        self._protected_name = name # _protected - convention only
```

```

        self.__private_name = name    # __private - name mangled

p = Person("Alice")

print(p.public_name)    # Works
print(p._protected_name)    # Works but convention says don't touch
# print(p.__private_name)    # ERROR! Name mangled to _Person__private_name

```

## C++ Access Modifiers

```

class Example {
public:    // Accessible everywhere
    int publicField;

protected:    // Accessible in class and subclasses
    int protectedField;

private:    // Accessible in class only
    int privateField;
};

```

## JavaScript Private Fields (ES2022+)

```

class Circle {
    // Private field (ES2022)
    #radius = 0;

    constructor(radius) {
        this.#radius = radius;    // Accessible within class
    }

    getRadius() {
        return this.#radius;    // OK - within class
    }
}

const c = new Circle(5);
console.log(c.radius);    // undefined (not accessible!)
console.log(c.getRadius());    // 5

```

## What Should Be Private?

**RULE:** Make fields private, methods public (usually)

What to make PRIVATE:

- Fields (instance variables)
- Helper methods used only internally

- Complex logic that shouldn't be exposed
- Data that could corrupt state if changed directly

What to make PUBLIC:

- Methods that are the "contract" / API
- Getters for read-only access
- Setters only when modification is safe

What to make PROTECTED:

- Methods/fields subclasses might need
- Extension points for subclasses

## Getter and Setter Pattern

```
class Person {
    private String name;    // PRIVATE - hidden
    private int age;        // PRIVATE - hidden

    // Public getter - READ access
    public String getName() {
        return name;
    }

    public int getAge() {
        return age;
    }

    // Public setter - CONTROLLED write access
    public void setName(String name) {
        if (name == null || name.isEmpty()) {
            throw new IllegalArgumentException("Invalid name");
        }
        this.name = name;
    }

    public void setAge(int age) {
        if (age < 0 || age > 150) {
            throw new IllegalArgumentException("Invalid age");
        }
        this.age = age;
    }
}

// Usage
Person p = new Person();
p.setName("Alice");    // Validated!
p.setAge(25);          // Validated!
```

```
// p.name = "Bob";    // ERROR! Private!
```

## JavaScript Getters/Setters

```
class Person {
    #name;    // Private field

    constructor(name) {
        this.#name = name;
    }

    // Getter
    get name() {
        return this.#name;
    }

    // Setter
    set name(value) {
        if (!value) throw new Error("Name required");
        this.#name = value;
    }
}

const p = new Person("Alice");
console.log(p.name);    // Alice (calls getter)
p.name = "Bob";        // (calls setter)
```

## Edge Cases & Traps

### Trap 1: Overly Public Fields

```
// BAD! Exposing internal state!
class Point {
    public int x;    // Anyone can modify directly!
    public int y;
}

Point p = new Point();
p.x = -999999;    // Invalid! No protection!
```

[WARNING] **Professor Trap:** Always use private fields with getters/setters!

### Trap 2: Setter That Does Nothing

```
// Useless setter!
public void setName(String name) {
    this.name = name;    // No validation = not better than public field!
}
```

```
// Better:
public void setName(String name) {
    if (name == null) throw new IllegalArgumentException();
    this.name = name;
}
```

### Trap 3: Getter Returning Mutable Object

```
class Container {
    private List<String> items = new ArrayList<>();

    // DANGER! Returns reference to internal mutable object!
    public List<String> getItems() {
        return items; // External code can modify!
    }
}

// External code:
container.getItems().add("HACKED!"); // Modifies internal list!

// FIX: Return copy
public List<String> getItems() {
    return new ArrayList<>(items); // Return a copy!
}
```

[WARNING] **Professor Trap:** Don't return mutable internals! Return copies!

### Trap 4: Public Static Field

```
// BAD! Shared mutable state!
public static List<String> sharedList = new ArrayList<>();

// FIX: Private static with accessor
private static final List<String> sharedList = new ArrayList<>();

public static List<String> getSharedList() {
    return Collections.unmodifiableList(sharedList); // Read-only!
}
```

### Examples

```
class BankAccount {
    // Private fields - hidden from outside
    private String accountNumber;
    private double balance;
    private Transaction[] transactions;
    private int transactionCount;

    // Constants
```

```

private static final double OVERDRAFT_FEE = 35.0;
private static final int MAX_TRANSACTIONS = 100;

// Constructor
public BankAccount(String accountNumber, double initialBalance) {
    if (accountNumber == null || accountNumber.isEmpty()) {
        throw new IllegalArgumentException("Invalid account number");
    }
    if (initialBalance < 0) {
        throw new IllegalArgumentException("Initial balance cannot be negative");
    }
    this.accountNumber = accountNumber;
    this.balance = initialBalance;
    this.transactions = new Transaction[MAX_TRANSACTIONS];
    this.transactionCount = 0;
}

// Public interface (API)
public String getAccountNumber() {
    return accountNumber; // Read-only, no setter
}

public double getBalance() {
    return balance;
}

public void deposit(double amount) {
    if (amount <= 0) {
        throw new IllegalArgumentException("Deposit amount must be positive");
    }
    balance += amount;
    addTransaction("DEPOSIT", amount);
}

public void withdraw(double amount) {
    if (amount <= 0) {
        throw new IllegalArgumentException("Withdrawal amount must be positive");
    }
    if (amount > balance) {
        balance -= OVERDRAFT_FEE;
        addTransaction("OVERDRAFT", OVERDRAFT_FEE);
        throw new IllegalStateException("Insufficient funds, overdraft fee charged");
    }
    balance -= amount;
    addTransaction("WITHDRAWAL", amount);
}

```

```

// Private helper - internal implementation hidden
private void addTransaction(String type, double amount) {
    if (transactionCount < MAX_TRANSACTIONS) {
        transactions[transactionCount++] = new Transaction(type, amount);
    }
}
}

```

### Example 1: Fully Encapsulated Class

```

class Student {
    private String name;
    private int age;

    // Private constructor - can't use new Student() directly
    private Student(String name, int age) {
        this.name = name;
        this.age = age;
    }

    // Static factory methods - create instances with validation
    public static Student createFreshman(String name) {
        return new Student(name, 18);
    }

    public static Student createAdult(String name, int age) {
        if (age < 18) {
            throw new IllegalArgumentException("Adult must be 18+");
        }
        return new Student(name, age);
    }
}

// Usage
Student s1 = Student.createFreshman("Alice"); // age=18
Student s2 = Student.createAdult("Bob", 25); // age=25
// Student s3 = new Student("Charlie", 20); // ERROR! Private constructor!

```

### Example 2: Static Factory Method

```

// In package com.example.models

class InternalData {
    String sensitiveInfo; // Default (package-private)

    void internalMethod() { } // Package-private method
}

```



```

}

// This class in same package can access:
class DataProcessor {
    void process() {
        InternalData data = new InternalData();
        data.sensitiveInfo = "Accessible"; // OK - same package
        data.internalMethod(); // OK - same package
    }
}

// But class in different package CANNOT:
class ExternalProcessor {
    void process() {
        InternalData data = new InternalData();
        data.sensitiveInfo = "NOT Accessible"; // ERROR!
        data.internalMethod(); // ERROR!
    }
}

```

### Example 3: Package-Level Access

#### Practice Questions

**MCQ 1:** Which modifier makes a member accessible only within its class? - A) public - B) protected - C) private - D) default

**MCQ 2:** Can a static method access an instance variable? - A) Yes, directly - B) Only through an object reference - C) No, never - D) Only if it's final

**MCQ 3:** What is encapsulation? - A) Hiding implementation details - B) Making fields public - C) Creating multiple constructors - D) Inheriting from a class

**Short Answer:** Why should fields usually be private? What are the benefits?

**Board Coding:** Create a class `Temperature` with a private `celsius` field, public `getCelsius()`, `getFahrenheit()`, `setCelsius()`, and `setFahrenheit()` methods. Ensure all values are validated.

**Oral Explanation:** Explain the difference between public, protected, and private. Give an example of when you would use each.

#### Solutions

**MCQ 1:** C) private

**MCQ 2:** C) No, never - static methods don't have `this` reference

**MCQ 3:** A) Hiding implementation details

**Short Answer:** Private fields protect internal state from external corruption. All access goes through controlled public methods (getters/setters) that can validate input, ensuring the object always remains in a valid state. This is the "protective barrier" of encapsulation.

## Board Coding:

```
class Temperature {
    private double celsius;

    public Temperature(double celsius) {
        setCelsius(celsius);
    }

    public double getCelsius() {
        return celsius;
    }

    public double getFahrenheit() {
        return celsius * 9/5 + 32;
    }

    public void setCelsius(double celsius) {
        if (celsius < -273.15) {
            throw new IllegalArgumentException("Below absolute zero!");
        }
        this.celsius = celsius;
    }

    public void setFahrenheit(double fahrenheit) {
        setCelsius((fahrenheit - 32) * 5/9);
    }
}
```

---

## Cheat-Sheet

| Concept                | Key Points                                     |
|------------------------|------------------------------------------------|
| <b>Encapsulation</b>   | Bundle data + methods, hide implementation     |
| <b>Private</b>         | Accessible within class only                   |
| <b>Protected</b>       | Accessible in class + package + subclasses     |
| <b>Public</b>          | Accessible everywhere                          |
| <b>Default</b>         | Accessible in package only                     |
| <b>Instance member</b> | Each object has its own copy                   |
| <b>Static member</b>   | One copy shared by all instances               |
| <b>Constructor</b>     | Initializes new objects                        |
| <b>this()</b>          | Constructor chaining (must be first statement) |

## Review Checklist

- ☐ **Encapsulation:** Can you explain why it's important?
- ☐ **Access modifiers:** Do you know when to use each?

- ☐ **Static vs instance:** Can you explain the difference?
- ☐ **Private fields:** Do you know why to use them?
- ☐ **Getters/setters:** Can you implement proper validation?
- ☐ **Constructor types:** Default, parameterized, overloaded?
- ☐ **this() chaining:** Can you chain constructors properly?
- ☐ **Common traps:** Static accessing instance? Returning mutable? Calling overridable method in constructor? # Chapter 3: Polymorphism and Type Systems

## 3.1 Overloading

### Definition / Theoretical Background

**Overloading** (also called **ad-hoc polymorphism**) is having multiple methods with the **same name** but **different parameters** within the same class or scope.

#### Two Types of Overloading:

| Type                        | What Differs                         | Same?                  |
|-----------------------------|--------------------------------------|------------------------|
| <b>Method Overloading</b>   | Number, type, or order of parameters | Return type can differ |
| <b>Operator Overloading</b> | Operand types (in some languages)    | Different semantics    |

### Method Overloading in Java

```
class Calculator {
    // Overload by number of parameters
    int add(int a, int b) {
        return a + b;
    }

    int add(int a, int b, int c) {
        return a + b + c;
    }

    // Overload by type of parameters
    double add(double a, double b) {
        return a + b;
    }

    // Overload by order (different types)
    String add(String a, int b) {
        return a + b;
    }

    int add(int a, String b) {
        return Integer.parseInt(b) + a;
    }
}
```

```

}

// Usage
Calculator calc = new Calculator();
calc.add(1, 2);           // Calls add(int, int)
calc.add(1, 2, 3);       // Calls add(int, int, int)
calc.add(1.5, 2.5);      // Calls add(double, double)
calc.add("Hello", 5);    // Calls add(String, int)

```

## Method Overloading Rules

```

class Rules {
    // CAN overload (different parameters)
    void method(int x) { }
    void method(double x) { }
    void method(int x, int y) { }

    // CANNOT overload (only return type differs)
    // int method(int x) { }      // ERROR! Same signature as first!
    // double method(int x) { }   // ERROR!

    // CAN overload static vs instance (different context)
    static void method(int x) { } // This is OK!
    void method(int x) { }        // Different because of static context
}

```

**Signature Rule:** Methods are distinguished by their **signature** (name + parameter types), NOT return type!

## Constructor Overloading

```

class User {
    private String name;
    private int age;
    private String email;

    // Overloaded constructors
    User(String name) {
        this.name = name;
        this.age = 0;
        this.email = "not provided";
    }

    User(String name, int age) {
        this.name = name;
        this.age = age;
        this.email = "not provided";
    }
}

```

```

    }

    User(String name, int age, String email) {
        this.name = name;
        this.age = age;
        this.email = email;
    }
}

```

## Python Function Overloading (Different Approach)

```

# Python doesn't have true overloading, but uses default arguments
class Calculator:
    def add(self, a, b=0, c=0): # Flexible signature
        return a + b + c

calc = Calculator()
calc.add(1, 2)           # a=1, b=2, c=0 -> 3
calc.add(1, 2, 3)       # a=1, b=2, c=3 -> 6

```

## C++ Operator Overloading

```

class Fraction {
public:
    int numerator;
    int denominator;

    Fraction(int n, int d) : numerator(n), denominator(d) {}

    // Operator overloading
    Fraction operator+(const Fraction& other) {
        int n = numerator * other.denominator + other.numerator * denominator;
        int d = denominator * other.denominator;
        return Fraction(n, d);
    }
};

Fraction f1(1, 2); // 1/2
Fraction f2(1, 3); // 1/3
Fraction f3 = f1 + f2; // Calls operator+

```

## Edge Cases & Traps

### Trap 1: Autoboxing/Unboxing Confusion

```

class Example {
    void process(int x) { System.out.println("int: " + x); }
}

```

```
void process(Integer x) { System.out.println("Integer: " + x); }
}
```

```
Example e = new Example();
e.process(5);           // Calls process(int) - primitive!
e.process(Integer.valueOf(5)); // Calls process(Integer) - boxed!

// With autoboxing, both might match!
```

[WARNING] **Professor Trap:** Primitive and boxed types can cause ambiguity!

### Trap 2: Widening vs Boxing

```
class Confusing {
    void method(long x) { System.out.println("long"); }
    void method(Integer x) { System.out.println("Integer"); }
}
```

```
Confusing c = new Confusing();
c.method(5); // Which one? long or Integer?
// Answer: long - int widens to long, but int doesn't box to Integer for overload resolution!
```

[WARNING] **Professor Trap:** Primitive widening beats boxing! int -> long -> boxing to Integer is the order.

### Trap 3: Varargs Last


```
class VarargsExample {
    void method(int x) { System.out.println("int"); }
    void method(int... args) { System.out.println("varargs"); }
}


VarargsExample v = new VarargsExample();
v.method(5); // Calls method(int), not varargs! Exact match wins
```

## 3.2 Inheritance

### Definition / Theoretical Background

**Inheritance** allows a class (subclass/derived) to inherit fields and methods from another class (superclass/base).

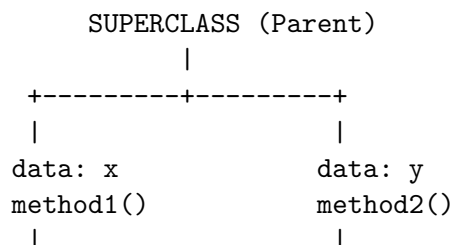



Inherits data: x, data: y, method1(), method2()

+ Can add NEW fields and methods

+ Can OVERRIDE existing methods

## Inheritance Hierarchy in Java

```

// Superclass
class Animal {
    protected String name;
    protected int age;

    public Animal(String name, int age) {
        this.name = name;
        this.age = age;
    }

    public void eat() {
        System.out.println(name + " is eating");
    }

    public void sleep() {
        System.out.println(name + " is sleeping");
    }
}

// Subclass - inherits from Animal
class Dog extends Animal {
    private String breed;

    // Subclass constructor
    public Dog(String name, int age, String breed) {
        super(name, age); // Call parent constructor FIRST
        this.breed = breed;
    }

    // Subclass-specific method
    public void bark() {
        System.out.println(name + " says Woof!");
    }

    // Override parent's method
    @Override

```

```

    public void eat() {
        System.out.println(name + " (dog) is eating kibble");
    }
}

// Usage
Dog buddy = new Dog("Buddy", 3, "Golden Retriever");
buddy.eat();      // "Buddy (dog) is eating kibble" - overridden!
buddy.sleep();    // "Buddy is sleeping" - inherited!
buddy.bark();     // "Buddy says Woof!" - subclass only!

```

## Inheritance Memory Visualization

When Dog inherits from Animal:

| Animal fields: | Dog fields: |
|----------------|-------------|
| +-----+        | +-----+     |
| name           | (inherited) |
| age            | breed       |
| +-----+        | +-----+     |

Dog object in memory:

```

+-----+
| Animal part (inherited) |
| +-----+ |
| | name | |
| | age | |
| +-----+ |
| Dog part (own) |
| +-----+ |
| | breed | |
| +-----+ |
+-----+

```

## Single vs Multiple Inheritance

| Type            | Description             | Languages                           |
|-----------------|-------------------------|-------------------------------------|
| <b>Single</b>   | One parent class        | Java, C#, Python                    |
| <b>Multiple</b> | Multiple parent classes | C++ (yes), Python (yes), Java (no!) |

```

// Java can ONLY extend ONE class
class A { }
class B { }
class C extends A, B { } // ERROR! Java doesn't support multiple inheritance!

```

## Java Single Inheritance



```

class A { void methodA() { } };
class B { void methodB() { } };

// C++ can extend multiple classes
class C : public A, public B {
    void methodC() {
        methodA(); // From A
        methodB(); // From B
    }
};

```

## C++ Multiple Inheritance

```

class A:
    def method(self): print("A")

class B:
    def method(self): print("B")

class C(A, B): # Multiple inheritance
    pass

c = C()
c.method() # Which method? Prints "A" - first in MRO!

# MRO for C: C -> A -> B -> object
# Python uses left-to-right depth-first MRO

```

## Python Multiple Inheritance (Method Resolution Order)

### The super Keyword

```

class Parent {
    int x = 10;
    void display() { System.out.println("Parent: " + x); }
}

class Child extends Parent {
    int x = 20;

    void display() {
        System.out.println("Child x = " + x); // x = 20 (own)
        System.out.println("Parent x = " + super.x); // x = 10 (parent's)
    }

    @Override

```

```

void display() {
    super.display(); // Call parent's display() first
    System.out.println("Child: " + x);
}
}

```

## Inheritance vs Composition

| Inheritance ("is-a")       | Composition ("has-a")      |
|----------------------------|----------------------------|
| Dog <b>IS-A</b> Animal     | Car <b>HAS-A</b> Engine    |
| Student <b>IS-A</b> Person | Library <b>HAS-A</b> Books |
| Circle <b>IS-A</b> Shape   | Team <b>HAS-A</b> Members  |

```

// INHERITANCE - Use when "is-a" relationship
class Animal { void eat() { } }
class Dog extends Animal { void bark() { } }

// COMPOSITION - Use when "has-a" relationship
class Engine { void start() { } }
class Car {
    private Engine engine; // Car HAS an Engine
    void start() { engine.start(); }
}

```

**When to Use Which:** - **Inheritance:** When subclass truly IS-A superclass (Dog is Animal) -  
**Composition:** When class HAS-A relationship with another class (Car has Engine)

[WARNING] **Favor composition over inheritance** - Inheritance creates tight coupling!

## Edge Cases & Traps

### Trap 1: Private Members Are Not Inherited

```

class Parent {
    private int secret = 42; // PRIVATE - NOT inherited!
    public int getSecret() { return secret; } // Must use getter
}

class Child extends Parent {
    // secret is NOT visible here!
    // System.out.println(secret); // ERROR!
    // But can access via:
    System.out.println(getSecret()); // Works!
}

```

### Trap 2: Single Inheritance Only in Java

```

class A { }
class B { }
class C { }
// Java: class D extends A, B, C { } // COMPILE ERROR!
// Java only allows ONE parent class!

```

### Trap 3: Diamond Problem (Multiple Inheritance Ambiguity)

```

// C++ handles this, but can be confusing
class A { void method() { std::cout << "A"; } };
class B { void method() { std::cout << "B"; } };

class C : public A, public B {
    void test() {
        // method(); // AMBIGUOUS! Which method()?
        A::method(); // Explicitly call A's method
        B::method(); // Explicitly call B's method
    }
};

```

### Trap 4: Overriding vs Overloading Confusion

```

class Parent {
    void process(int x) { System.out.println("Parent int"); }
}

class Child extends Parent {
    void process(double x) { System.out.println("Child double"); }
}

Child c = new Child();
c.process(5); // Calls process(double) because 5 is widened to 5.0!
c.process(5.0); // Calls process(double)

Parent p = c; // UPCAST
p.process(5); // Calls Parent's process(int)! Polymorphism!

```

---

## 3.3 Subtyping, Static and Dynamic Types, Type Checking

### Subtyping

Subtype = A type that can be used where a supertype is expected.

```

class Animal { }
class Dog extends Animal { } // Dog is subtype of Animal

Animal a = new Dog(); // Valid! Dog can be used as Animal
// a is statically Animal, but dynamically Dog

```

**The Liskov Substitution Principle:** > “Objects of a superclass should be replaceable with objects of its subclasses without breaking the application.”

```
// If Dog extends Animal, then anywhere Animal is expected, Dog can be used!  
void feedAnimal(Animal a) { } // Accepts Dog, Cat, Bird, etc.
```

```
Dog d = new Dog();  
feedAnimal(d); // Works! Dog IS-A Animal
```

## Static vs Dynamic (Runtime) Type

```
class Animal { void speak() { System.out.println("..."); } }  
class Dog extends Animal { @Override void speak() { System.out.println("Woof"); } }  
class Cat extends Animal { @Override void speak() { System.out.println("Meow"); } }  
  
Animal a = new Dog();  
// Static type: Animal (known at compile time)  
// Dynamic type: Dog (known only at runtime)  
  
a = new Cat();  
// Static type: Animal (compiler sees Animal)  
// Dynamic type: Cat (assigned at runtime)  
  
// Compiler only knows static type - decides what methods are callable  
// a.speak(); // Valid! speak() exists in static type  
// a.bark(); // ERROR! bark() not in static type (Animal)
```

## Static vs Dynamic Type Visualization:

COMPILE TIME (Static Type)

```
+-----+  
| Animal a;                                |  
| Compiler only knows: a is Animal         |  
| Allowed calls: speak(), eat(), etc.     |  
| NOT allowed: bark(), meow()             |  
+-----+
```

|  
v

RUNTIME (Dynamic Type)

```
+-----+  
| a = new Dog(); // or new Cat()          |  
| At runtime, we KNOW actual type         |  
| Dog.dogBark() or Cat.meow() called      |  
+-----+
```

## Type Checking

```
// Type checked at COMPILE TIME
```

```
Animal a = new Dog(); // OK - Dog is-a Animal
a.bark();              // ERROR - bark() not in Animal
```

## Static Typing (Java, C++, C#)

```
# Type checked at RUNTIME
a = Dog() # No type declaration
a.bark()  # Works at runtime if Dog has bark(), error otherwise
```

## Dynamic Typing (Python, JavaScript)

```
# "If it walks like a duck and quacks like a duck..."
# No type inheritance needed!
class Duck:
    def quack(self): print("Quack!")

class Person:
    def quack(self): print("I'm pretending!")

def make_it_quack(obj):
    obj.quack() # Any object with quack() works!

make_it_quack(Duck()) # Works
make_it_quack(Person()) # Works too!
```

## Duck Typing (Python)

## Type Casting / Casting

```
class Animal { void eat() { } }
class Dog extends Animal { void bark() { } }
class Cat extends Animal { void meow() { } }

// Upcast (safe, implicit)
Dog d = new Dog();
Animal a = d; // Upcast to Animal - always safe!

// Downcast (unsafe, explicit)
Animal a = new Dog(); // a is actually a Dog
Dog d2 = (Dog) a;      // Downcast - must be explicit!
d2.bark();             // Works because a is really a Dog

// Downcast without checking (DANGEROUS!)
Animal a2 = new Cat(); // a2 is actually a Cat
Dog d3 = (Dog) a2;     // Compiles, but RUNTIME ERROR at a3.bark()!
// ClassCastException: Cat cannot be cast to Dog
```

```

Animal a = new Cat();

if (a instanceof Dog) {
    Dog d = (Dog) a; // Safe to cast
    d.bark();
}
else if (a instanceof Cat) {
    Cat c = (Cat) a; // Safe
    c.meow();
}

// Modern Java: pattern matching
if (a instanceof Dog d) { // Java 16+
    d.bark(); // d is already cast to Dog
}

```

instanceof (Type Checking)

## Edge Cases & Traps

### Trap 1: Static vs Dynamic Method Dispatch

```

class Parent {
    void method() { System.out.println("Parent"); }
    static void staticMethod() { System.out.println("Parent static"); }
}

class Child extends Parent {
    @Override
    void method() { System.out.println("Child"); } // Instance method - overridden
    static void staticMethod() { System.out.println("Child static"); } // HIDES, not override
}

Parent p = new Child();
p.method(); // "Child" - runtime dispatch (polymorphism!)
p.staticMethod(); // "Parent static" - static methods don't override!

```

[WARNING] **Professor Trap:** Static methods are hidden, not overridden!

### Trap 2: Object vs Reference Confusion

```

// What is printed?
class Base {
    int x = 5;
}

class Derived extends Base {
    int x = 10;
}

```

```

Derived d = new Derived();
System.out.println(d.x);           // 10 (Derived's x)

Base b = d;                        // Upcast
System.out.println(b.x);           // 5 (Base's x!)
// Field x is NOT overridden - it's SHADOWED!
// Use getters to ensure proper polymorphism

```

---

## 3.4 Overriding and Dynamic Binding

### Method Overriding

**Overriding** = Providing a new implementation for an inherited method in the subclass.

```

class Animal {
    void makeSound() { System.out.println("Some sound"); }
}

class Dog extends Animal {
    @Override // Annotation (optional but recommended)
    void makeSound() { System.out.println("Woof!"); }
}

class Cat extends Animal {
    @Override
    void makeSound() { System.out.println("Meow!"); }
}

```

### Dynamic Binding (Polymorphism)

```

+-----+
|          DYNAMIC METHOD DISPATCH          |
+-----+
|
|   Animal[] animals = { new Dog(), new Cat(), new Dog() };
|
|   for (Animal a : animals) {
|       a.makeSound();
|   }
|
|   At compile time: a.makeSound() is called on Animal
|   At runtime:      Actual type determines which version runs
|
|   Output:
|   "Woof!"   (Dog's makeSound)
|   "Meow!"   (Cat's makeSound)
|   "Woof!"   (Dog's makeSound)
|
+-----+

```

```
|
|  SAME CODE - DIFFERENT behavior based on ACTUAL type!
|
+-----+
```

## The Override Annotation

```
class Parent {
    void display() { System.out.println("Parent"); }
}

class Child extends Parent {
    @Override // Tells compiler to check this actually overrides something
    void display(int x) { System.out.println("Child"); } // ERROR! No method to override!

    @Override // This one is correct
    void display() { System.out.println("Child"); }
}
```

## Overriding Rules

```
class Base {
    // CAN override
    void method() { }

    // CANNOT override
    private void method(); // Private - not inherited!
    final void method();   // Final - cannot override
    static void method();   // Static - hidden, not overridden
}
```

### Rules Table:

| Aspect             | Override Rule                         |
|--------------------|---------------------------------------|
| <b>Name</b>        | Must be same                          |
| <b>Parameters</b>  | Must be same (or compatible)          |
| <b>Return type</b> | Must be same or covariant (subtype)   |
| <b>Access</b>      | Cannot be more restrictive            |
| <b>Exception</b>   | Cannot throw new unchecked exceptions |

## Covariant Return Type

```
class Animal { }
class Dog extends Animal { }

class Cage {
    Animal getAnimal() { return new Animal(); }
}
```



```
class DogCage extends Cage {
    @Override
    Dog getAnimal() { return new Dog(); } // Covariant - Dog is subtype of Animal
}
```

## Abstract Methods and Classes

```
// Abstract class - CAN'T be instantiated
abstract class Shape {
    abstract double area(); // Abstract - no implementation
    abstract double perimeter();

    // Can have concrete methods too
    void printInfo() {
        System.out.println("Area: " + area());
    }
}

class Circle extends Shape {
    double radius;

    Circle(double radius) { this.radius = radius; }

    @Override
    double area() { return Math.PI * radius * radius; }

    @Override
    double perimeter() { return 2 * Math.PI * radius; }
}

// Shape s = new Shape(); // ERROR - abstract!
Shape s = new Circle(5); // OK - concrete subclass
s.area(); // Calls Circle's area!
```

## 3.5 Interfaces

### Definition / Theoretical Background

An **interface** is a contract that defines a set of method signatures without implementation.

| INTERFACE (Contract) | IMPLEMENTATIONS |
|----------------------|-----------------|
| +-----+              | +-----+         |
| + fly()              | Bird : Flyer    |
| + land()             | +-----+         |
| + takeoff()          | +-----+         |
| +-----+              | Plane : Flyer   |

+-----+

Contract: ANYTHING that implements Flyer  
must provide fly(), land(), takeoff()

## Java Interface Example

```
// Interface definition
interface Drawable {
    void draw(); // Abstract method (implicitly)

    // Java 8+: default method
    default void print() {
        System.out.println("Printing...");
    }

    // Java 8+: static method
    static void info() {
        System.out.println("Drawable interface");
    }
}

interface Serializable {
    void serialize();
}

// Class implementing multiple interfaces
class Circle implements Drawable, Serializable {
    double radius;

    Circle(double radius) { this.radius = radius; }

    @Override
    public void draw() {
        System.out.println("Drawing circle with radius " + radius);
    }

    @Override
    public void serialize() {
        // serialization logic
    }
}
```

## Interface vs Abstract Class

| Aspect  | Interface                    | Abstract Class |
|---------|------------------------------|----------------|
| Methods | Abstract (no implementation) | Can have both  |
| Fields  | public static final only     | Any type       |

| Aspect                      | Interface                 | Abstract Class           |
|-----------------------------|---------------------------|--------------------------|
| <b>Constructors</b>         | None                      | Can have constructors    |
| <b>Multiple inheritance</b> | Yes (implements multiple) | No (extends one)         |
| <b>Use when</b>             | “Can-do” relationship     | “Is-a” relationship      |
| <b>State</b>                | No instance fields        | Can have instance fields |

```
// Interface - "can do" (capability)
interface Flyable {
    void fly();
}

interface Swimmable {
    void swim();
}

// Duck CAN do both!
class Duck implements Flyable, Swimmable {
    @Override
    public void fly() { System.out.println("Duck flying"); }

    @Override
    public void swim() { System.out.println("Duck swimming"); }
}
```

## Interface as Type

```
interface Drawable {
    void draw();
}

class Circle implements Drawable { /* ... */ }
class Square implements Drawable { /* ... */ }

class Canvas {
    // Accepts ANY class that implements Drawable
    void addShape(Drawable d) {
        d.draw(); // Don't care what actual type is!
    }
}

Canvas canvas = new Canvas();
canvas.addShape(new Circle()); // OK
canvas.addShape(new Square()); // OK
```

## Default Methods (Java 8)

```
interface Logger {  
    void log(String message); // Abstract  
  
    // Default - provides implementation  
    default void logError(String message) {  
        log("[ERROR] " + message);  
    }  
  
    // Static - belongs to interface  
    static Logger defaultLogger() {  
        return System.out::println;  
    }  
}
```

## Edge Cases & Traps

### Trap 1: Interface vs Abstract Class Confusion

```
// When to use abstract class vs interface?  
// Abstract class: When classes share state/implementation  
abstract class Shape {  
    protected String color; // Shared state  
    abstract double area(); // To implement  
}  
  
// Interface: When only contract needed  
interface Drawable {  
    void draw(); // Just the contract  
}
```

### Trap 2: Adding Methods to Interface (Breaking Change)

```
// Old interface  
interface MyInterface {  
    void oldMethod();  
}  
  
// Adding new method breaks ALL implementing classes!  
interface MyInterface {  
    void oldMethod();  
    void newMethod(); // All implementations must add this!  
}  
  
// Use default method to avoid breaking:  
interface MyInterface {  
    void oldMethod();  
    default void newMethod() { /* empty default */ }  
}
```

```
}
```

### Trap 3: Multiple Interface Conflict

```
interface A { default void method() { System.out.println("A"); } }
interface B { default void method() { System.out.println("B"); } }

class C implements A, B {
    @Override
    public void method() {
        A.super.method(); // Must explicitly choose!
        // Or: B.super.method();
    }
}
```

---

## 3.6 Generics

### Definition / Theoretical Background

**Generics** allow writing reusable code that works with different types while maintaining type safety at compile time.

```
// WITHOUT generics - unchecked, unsafe
class Box {
    private Object item;
    public void set(Object item) { this.item = item; }
    public Object get() { return item; }
}

Box b = new Box();
b.set("hello");
String s = (String) b.get(); // Cast needed, can fail!

// WITH generics - type safe, checked at compile time
class Box<T> { // T is type parameter
    private T item;
    public void set(T item) { this.item = item; }
    public T get() { return item; } // No cast needed!
}

Box<String> b2 = new Box<>();
b2.set("hello");
String s2 = b2.get(); // No cast! Compiler knows it's String!
```

### Generic Class

```

class Pair<K, V> {
    private K key;
    private V value;

    public Pair(K key, V value) {
        this.key = key;
        this.value = value;
    }

    public K getKey() { return key; }
    public V getValue() { return value; }
}

Pair<String, Integer> p = new Pair<>("Age", 25);
String key = p.getKey();    // No cast!
Integer val = p.getValue(); // No cast!

```

## Generic Methods

```

class Utils {
    // Generic method - type inferred from arguments
    public static <T> void print(T item) {
        System.out.println(item);
    }

    public static <T> int indexOf(T[] array, T item) {
        for (int i = 0; i < array.length; i++) {
            if (array[i].equals(item)) return i;
        }
        return -1;
    }
}

String[] names = {"Alice", "Bob"};
int pos = Utils.indexOf(names, "Bob"); // Type inferred
Utils.print("Hello"); // Type inferred as String

```

## Bounded Type Parameters

```

// T must be a subclass of Number
class NumberBox<T extends Number> {
    private T value;

    public T getValue() { return value; }

    public double doubleValue() {

```

```

        return value.doubleValue(); // Can call Number methods!
    }
}

NumberBox<Integer> nb = new NumberBox<>(5); // OK
NumberBox<Double> nd = new NumberBox<>(3.14); // OK
// NumberBox<String> ns = new Box<>("hi"); // ERROR! String doesn't extend Number!

```

## Upper and Lower Bounds

```

// Upper bound - T must be Number or subclass
void processNumbers(List<? extends Number> list) {
    // Can READ from list (as Number), cannot WRITE
    for (Number n : list) {
        System.out.println(n.doubleValue());
    }
    // list.add(5); // ERROR! Don't know exact type
}

// Lower bound - T must be Integer or superclass
void processIntegers(List<? super Integer> list) {
    // Can WRITE to list, can READ as Object
    list.add(5); // OK! List is at least Integer[]
    // Integer i = list.get(0); // ERROR! Only know it's at least Object
}

// PECS: Producer Extends, Consumer Super

```

## Generic Constraints

```

// Multiple bounds
class MyClass<T extends Comparable<T> & Serializable> {
    // T must implement both Comparable AND Serializable
}

// Interface vs Class in bounds
class A { }
interface B { }
class C<T extends A & B> { } // T extends A AND implements B

```

## Type Erasure

```

// At compile time, generics are erased
class Box<T> {
    private T item;
    public T get() { return item; }
}

```

```

}

// After erasure (at runtime):
class Box {
    private Object item; // T becomes Object (or bound)
    public Object get() { return item; }
}

// This means:
Box<String> s = new Box<>();
Box b = s; // Same class! Cannot do: b.set(5); // No type check at runtime

```

## Edge Cases & Traps

### Trap 1: Type Erasure at Runtime

```

List<String> strings = new ArrayList<>();
List<Integer> ints = new ArrayList<>();

// At RUNTIME, both are just List!
System.out.println(strings.getClass() == ints.getClass()); // TRUE!

// Cannot do generic type checking at runtime:
if (list instanceof List<String>) { } // ERROR! Type erased!
if (list instanceof List<?>) { } // OK! Use wildcard

```

### Trap 2: Generic Arrays

```

// Cannot create generic array directly
// T[] array = new T[10]; // ERROR!
T[] array = (T[]) new Object[10]; // Works but unchecked cast warning

// Better approach:
class Container<T> {
    private Object[] elements;
    public Container(int size) {
        elements = new Object[size];
    }
    public T get(int index) {
        return (T) elements[index]; // Cast needed
    }
}

```

### Trap 3: Primitive Types Don't Work

```

// List<int> list = new ArrayList<>(); // ERROR! No primitives!

// Must use wrapper classes:
List<Integer> list = new ArrayList<>(); // Integer, not int

```



```
list.add(5); // Autoboxes to Integer(5)
int x = list.get(0); // Unboxes to int
```

## 3.7 Subtype and Parametric Polymorphism

### Types of Polymorphism

| Type                         | Description                         | When         |
|------------------------------|-------------------------------------|--------------|
| <b>Ad-hoc (Overloading)</b>  | Same name, different params         | Compile time |
| <b>Parametric (Generics)</b> | Code works with any type            | Compile time |
| <b>Subtype (Inheritance)</b> | One interface, many implementations | Runtime      |

### Subtype Polymorphism

```
// Same method, different behavior based on actual type
interface Shape {
    double area();
}

class Circle implements Shape {
    double radius;
    @Override
    double area() { return Math.PI * radius * radius; }
}

class Rectangle implements Shape {
    double width, height;
    @Override
    double area() { return width * height; }
}

void printArea(Shape s) {
    System.out.println(s.area()); // Calls correct area()!
}

printArea(new Circle(5)); // Prints circle area
printArea(new Rectangle(4, 5)); // Prints rectangle area
```

### Parametric Polymorphism

```
// One implementation works for ANY type
class Stack<T> {
    private T[] elements;
    private int top;
```

```

    public void push(T item) { /* ... */ }
    public T pop() { /* ... */ return elements[top]; }
}

Stack<Integer> intStack = new Stack<>(); // For integers
Stack<String> strStack = new Stack<>(); // For strings
// Same Stack class works for both!

```

## Combined Polymorphism Example

```

// Subtype + Generic = Powerful combination
interface Repository<T> {
    void save(T item);
    T findById(long id);
}

class User { }

class UserRepository implements Repository<User> {
    @Override
    public void save(User user) { /* DB save */ }

    @Override
    public User findById(long id) { /* DB query */ }
}

// Can treat many repositories uniformly
class Service<T> {
    private Repository<T> repository;

    public Service(Repository<T> repo) {
        this.repository = repo;
    }

    public void saveAll(List<T> items) {
        for (T item : items) {
            repository.save(item);
        }
    }
}

```

## Practice Questions

**MCQ 1:** When is method overloading resolved? - A) Runtime - B) Compile time - C) Depends on language - D) Never

**MCQ 2:** What does @Override annotation do? - A) Changes method to static - B) Forces

compile-time override check - C) Makes method public - D) Nothing

**MCQ 3:** What is type erasure in Java generics? - A) Removing type information at runtime - B) Adding type information at compile time - C) Converting primitives to objects - D) Runtime type checking

**Short Answer:** Explain the difference between static typing and dynamic typing.

**Board Coding:** Create an interface **Shape** with **area()** and **perimeter()** methods, then implement **Circle** and **Rectangle** classes.

**Oral Explanation:** Explain the difference between method overloading and method overriding. When would you use each?

## Solutions

**MCQ 1:** B) Compile time - overloading resolved by parameter types at compile time

**MCQ 2:** B) Forces compile-time override check - compiler verifies method actually overrides a parent method

**MCQ 3:** A) Removing type information at runtime - generic type parameters are erased and replaced with **Object** or bounds

**Short Answer:** Static typing checks types at compile time (Java, C++), catching errors before runtime. Dynamic typing checks at runtime (Python, JavaScript), allowing more flexibility but delaying error detection.

---

## Cheat-Sheet

| Concept                     | Key Points                                           |
|-----------------------------|------------------------------------------------------|
| <b>Overloading</b>          | Same name, different params, compile time            |
| <b>Overriding</b>           | Same signature, new implementation, runtime          |
| <b>Inheritance</b>          | is-a relationship, extends parent                    |
| <b>Subtype polymorphism</b> | Same interface, different implementation at runtime  |
| <b>Generics</b>             | Type parameters, , compile-time safety               |
| <b>Interface</b>            | Contract, implements keyword, multiple allowed       |
| <b>Abstract class</b>       | Cannot instantiate, can have partial implementation  |
| <b>Dynamic dispatch</b>     | Runtime method selection based on actual object type |

## Review Checklist

- ☐ **Overloading:** Can you identify overloaded methods?
- ☐ **Overriding:** Can you override methods correctly with rules?
- ☐ **Inheritance:** Can you explain is-a vs has-a relationship?
- ☐ **Static vs dynamic type:** Do you understand the difference?
- ☐ **Interfaces:** Can you design and implement interfaces?
- ☐ **Generics:** Can you use and create generic classes/methods?
- ☐ **Type erasure:** Do you understand Java's erasure mechanism?

- **Polymorphism:** Can you explain all three types of polymorphism? # Chapter 4: Memory Management

## 4.1 Memory Management Overview

### Definition / Theoretical Background

**Memory Management** is the process of allocating, using, and releasing memory during program execution. In OOP languages, this involves managing:

- **Heap memory** for objects (instances)
- **Stack memory** for method calls and local variables
- **Static/Code memory** for class metadata

| PROCESS MEMORY   |               |                   |
|------------------|---------------|-------------------|
| STACK            | HEAP          | CODE/META         |
| Method frames    | Objects       | Class definitions |
| Local variables  | Instance data | Static fields     |
| Parameters       | Arrays        | Method bytecode   |
| Return addresses | String pool   |                   |
| LIFO, fast       | Dynamic, slow | Static, fast      |
| Auto cleanup     | Manual or GC  | Auto cleanup      |

### Memory in OOP Languages

| Language | Object Storage | Garbage Collection          |
|----------|----------------|-----------------------------|
| Java     | Heap           | Yes (automatic)             |
| Python   | Heap           | Yes (automatic)             |
| C#       | Heap           | Yes (automatic)             |
| C++      | Heap or Stack  | No (manual)                 |
| Go       | Heap           | Yes (automatic, concurrent) |
| Rust     | Heap (owned)   | Yes (ownership model)       |

## 4.2 Stack and Heap in OOP

### Stack Memory in Java/Python


```
class Example {
    int instanceVar; // On heap with object

    void method(int param) { // param on stack
        int local = 10;      // local on stack
    }
}
```

```

    Object obj = new Object(); // Reference on stack, object on heap
}

```

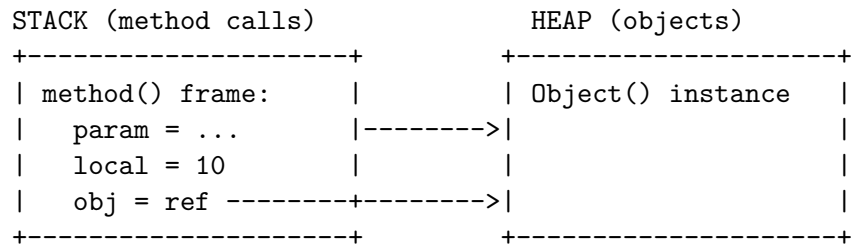

## Object Allocation

```


class Dog {
    String name;
    int age;
}

// Creating objects
Dog buddy = new Dog();

```

**What new does:** 1. Allocates memory on heap (size of Dog class) 2. Initializes fields to default values (null, 0) 3. Calls constructor 4. Returns reference (address) to the object

new Dog() allocates on heap:

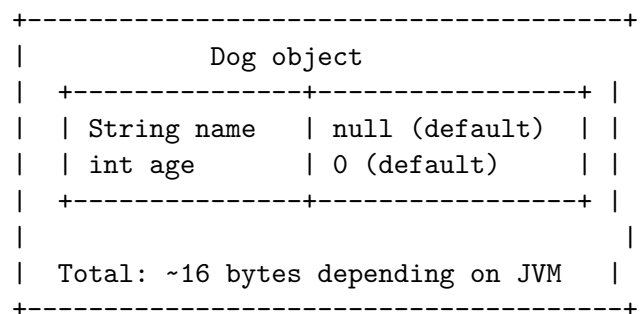

## Memory Visualization

```

class Owner {
    String name;
    Dog dog; // Reference to Dog
}

Owner o = new Owner(); // Owner object on heap
o.name = "Alice";
o.dog = new Dog(); // Dog object on heap
o.dog.name = "Buddy"; // Dog's name

```

```
// Memory looks like:
/*
HEAP:
+-----+
| Owner:      |
|  name --> "Alice"  |
|  dog -----+--+
+-----+ |
|                               |
+-----+ |
| Dog:          | |
|  name --> "Buddy"  |<--+
|  age = 0          |
+-----+
*/
```

## Stack vs Heap Comparison in OOP

| Aspect             | Stack                  | Heap                    |
|--------------------|------------------------|-------------------------|
| <b>What stored</b> | Primitives, references | Objects, arrays         |
| <b>Lifetime</b>    | Until method returns   | Until GC reclaims       |
| <b>Access</b>      | LIFO (method order)    | Random (via references) |
| <b>Size</b>        | Small, fixed limit     | Large, dynamic          |
| <b>Speed</b>       | Fast                   | Slower                  |
| <b>Management</b>  | Automatic              | Manual or GC            |

## 4.3 Garbage Collection

### Definition / Theoretical Background

**Garbage Collection (GC)** is the automatic process of reclaiming memory that is no longer in use.

**When is memory “garbage”?** 1. Object has no references pointing to it 2. Reference chain doesn’t reach the object

```
Dog d = new Dog(); // Object exists, referenced by d
d = null;           // Object now has NO references!
// Object becomes garbage - GC will reclaim it eventually
```

### Object Eligibility for GC

```
// Three paths to garbage collection:

// 1. Reference goes out of scope
void method() {
    Dog d = new Dog(); // Object created
```

```

} // d goes out of scope here, object eligible for GC

// 2. Reference reassigned
Dog d = new Dog("Buddy");
d = new Dog("Max"); // First Dog object now has no references!

// 3. Reference set to null
Dog d = new Dog();
d = null; // Object now eligible for GC

```

## GC Algorithm Visualization

### MARK AND SWEEP ALGORITHM:

Step 1: ROOTS (known live references)

```

+-----+
| Stack references|
| Static fields  |--> reachable = {d1, d2}
| CPU registers  |
+-----+

```

Step 2: MARK - traverse from roots, mark all reachable

REACHABLE OBJECTS ARE LIVE

```

+-----+      +-----+      +-----+
| Root --+-->| D1  |      | D2  |      | D3  |      | (D1, D2 reachable)
+-----+      +-----+      +-----+      +-----+
                        |                      ^
                        v                      |
                        +-----+              |
                        | D4    |<-----+
                        +-----+      (D4 reachable through D1)

```

Step 3: SWEEP - collect unmarked (garbage)

```

+-----+      +-----+      +-----+
| D1  |      | D2  |      | D4  |
+-----+      +-----+      +-----+

```

Garbage: D3 (unreachable)

Step 4: SWEEP removes D3 from heap

## Generational GC

Most modern GCs use **generational collection** - objects are divided by age:

HEAP SEGMENTS:

```

+-----+
|
|  YOUNG GEN (Eden + Survivor Spaces)
|  +--- Eden: New objects allocated here
|  +--- S0: Surviving minor GC #1
|  +--- S1: Surviving minor GC #2
|
|  OLD GEN (Tenured): Long-lived objects
|  Objects that survive many young GC cycles move here
|
|  METASPACE/Native: Class definitions, interned
|  strings (JVM specific)
+-----+

```

Hypothesis: Most objects die young (80-98%!)

=> Collect young generation frequently

=> Old generation collected rarely

## GC Types in Different Languages

```

// JVM options for different collectors:
// -XX:+UseSerialGC      Serial (stop-the-world)
// -XX:+UseParallelGC   Parallel (throughput)
// -XX:+UseConcMarkSweepGC CMS (low latency)
// -XX:+UseG1GC         G1 (default in Java 9+)
// -XX:+UseZGC          ZGC (ultra-low latency)

```

**Java GC (Multiple Algorithms) G1 (Garbage First) - Default since Java 9:** - Divides heap into regions - Tracks live objects per region - Collects regions with most garbage first - Predictable pause times

```

import gc

# Python uses reference counting (immediate) + cycle detector (periodic)
import sys

obj = object()
print(sys.getrefcount(obj)) # 2 (obj + parameter to getrefcount)

# Cycle detector finds reference cycles that counting misses:
gc.collect() # Force cycle collection

# Can find cycles:
gc.garbage # List of objects with reference cycles

```

## Python GC (Reference Counting + Cycle Detector)



```

// .NET GC has generations: 0, 1, 2
// Gen0: Short-lived objects (ephemeral)
// Gen1: Buffer between short and long lived
// Gen2: Long-lived objects

// Explicit hints
GC.Collect(); // Force collection
GC.Collect(0); // Gen0 only
GC.Collect(2, GCCollectionMode.Forced);

// Keep object alive across generations:
GC.KeepAlive(obj); // obj cannot be collected before this point

```

## C# GC

### Memory Leaks in OOP

#### Common Leak Patterns:

```

// LEAK 1: Collection grows forever
List<Object> cache = new ArrayList<>();
public void addToCache(Object obj) {
    cache.add(obj); // Never removed!
}

// LEAK 2: Static collection
static List<Object> staticCache = new ArrayList<>(); // Lives forever!

// LEAK 3: Inner class holding outer reference (Java)
class Outer {
    Object data;
    class Inner {
        // Inner implicitly holds reference to Outer!
        void method() { }
    }
}

```

### Edge Cases & Traps

#### Trap 1: Static Fields Holding Object References

```

class Cache {
    static List<Object> cache = new ArrayList<>(); // Never GC'd!

    public static void add(Object obj) {
        cache.add(obj); // All objects stored here live forever!
    }
}

```

```
// Even if Cache object is GC'd, staticCache remains!
```

[WARNING] **Professor Trap:** Static fields are NEVER garbage collected during program lifetime!

### Trap 2: String Interning Causing Memory Buildup

```
String s1 = new String("hello"); // Creates NEW string object
String s2 = "hello";             // Uses string pool

// In some cases, calling intern() on many strings
// can cause PermGen/Metaspace exhaustion
for (String s : hugeList) {
    s.intern(); // If pool grows too big, OOM!
}
```

### Trap 3: WeakReference Misuse

```
// WeakReference doesn't prevent GC but wrong usage:
// Don't use for caching without proper handling
WeakHashMap<Key, Value> cache = new WeakHashMap<>();
// Entries can disappear anytime GC runs!
```

### Trap 4: C++ Delete on Null

```
Dog* d = nullptr;
delete d; // SAFE! Deleting null is a no-op.
// But don't do: delete d; d = nullptr; (access after delete)
```

### Trap 5: GC and Finalization Order Uncertainty

```
class A {
    B b;
    @Override
    protected void finalize() {
        // b might already be finalized!
        // b.doSomething(); // May crash!
    }
}
```

[WARNING] **Professor Trap:** In Java, you can't rely on finalization order!

### Trap 6: Premature GC Hints

```
// System.gc() is JUST A HINT, not guaranteed!
System.gc(); // May do nothing, especially in production!

// Don't use for cleanup logic - use try-with-resources instead!
```

### How to Avoid Memory Leaks

```
// 1. Use weak references for caches
import java.lang.ref.WeakHashMap;
```

```

// 2. Clear collections when done
cache.clear();

// 3. Use try-with-resources for cleanup
try (Connection conn = getConnection()) {
    // Use connection
} // Auto-closed!

// 4. Unregister listeners
button.removeActionListener(listener);

// 5. Use proper scope
void process() {
    // Local object - auto-cleaned when method ends
    TempData data = new TempData();
    // ...
} // data eligible for GC

```

---

## 4.4 Manual Memory Management (C++)

### No Automatic GC - Manual Deletion

```

class Dog {
public:
    string name;
    Dog(const string& n) : name(n) {}
    ~Dog() { cout << name << " destroyed\n"; }
};

// Creating objects
Dog* d = new Dog("Buddy"); // Heap allocation
delete d; // MUST delete manually!

// Stack allocation (automatic cleanup)
Dog d2("Max"); // Automatically destroyed when goes out of scope

```

### RAII (Resource Acquisition Is Initialization)

```

// RAII - wrap resource in object destructor
class FileHandler {
    FILE* file;
public:
    FileHandler(const char* name) {
        file = fopen(name, "r");
    }
}

```

```

    ~FileHandler() {
        if (file) fclose(file); // Automatic cleanup!
    }
};

void process() {
    FileHandler fh("data.txt");
    // Use file...
} // fh automatically closed when going out of scope!

// Compare to C-style:
void processC() {
    FILE* f = fopen("data.txt", "r");
    // ...
    fclose(f); // Easy to forget! And exceptions can bypass this!
}

```

## Smart Pointers (Modern C++)

```

#include <memory>

// Unique pointer - exclusive ownership
unique_ptr<Dog> dog1 = make_unique<Dog>("Buddy");
// dog1 automatically deleted when goes out of scope!

// Shared pointer - shared ownership
shared_ptr<Dog> dog2 = make_shared<Dog>("Max");
// Reference counted, deleted when last reference gone

void function() {
    shared_ptr<Dog> dog3 = dog2; // Reference count becomes 2
} // dog3 destroyed, count back to 1

// Weak pointer - non-owning reference
weak_ptr<Dog> weakDog = dog2; // Doesn't increase count
if (auto locked = weakDog.lock()) {
    // Only access if object still exists
}

// No delete needed with smart pointers!

```

## Smart Pointer Comparison

| Pointer       | Ownership | Copy            | Use When                         |
|---------------|-----------|-----------------|----------------------------------|
| unique_ptr<T> | Exclusive | No              | Single owner, transfer with move |
| shared_ptr<T> | Shared    | Yes (ref count) | Multiple owners                  |

| Pointer                        | Ownership | Copy | Use When              |
|--------------------------------|-----------|------|-----------------------|
| <code>weak_ptr&lt;T&gt;</code> | None      | Yes  | Break cycles, observe |

## Dangling Pointers

```
// Dangling pointer - points to deleted memory
Dog* createDog() {
    Dog d("Buddy");
    return &d; // WRONG! d destroyed when function ends!
}

Dog* safeDog() {
    Dog* d = new Dog("Buddy"); // Heap allocation
    return d; // OK - d won't be destroyed
}

// When done:
delete safeDog(); // Delete when finished

// Better: return smart pointer
shared_ptr<Dog> createDogSmart() {
    return make_shared<Dog>("Buddy"); // Auto-cleanup!
}
```

## Memory Leak Example

```
void leak() {
    Dog* d = new Dog("Leaky");
    // ... some code ...
    if (error) return; // Oops! Forgot delete!
    delete d;
}

// Fixed with unique_ptr:
void noLeak() {
    unique_ptr<Dog> d = make_unique<Dog>("Safe");
    if (error) return; // No problem! d auto-deleted!
}
```

---

## 4.5 Object Lifecycle Summary

Creation -> Use -> Destruction

OBJECT LIFECYCLE:

1. CREATION
  - new operator allocates memory
  - Fields initialized to defaults
  - Constructor runs
  - Object becomes reachable
2. USAGE
  - Methods called, fields modified
  - References may be copied
  - Object remains in memory
3. ELIGIBLE FOR GC (when no references)
  - Reference set to null
  - Reference goes out of scope
  - Reference reassigned
4. COLLECTION (automatic or manual)
  - GC reclaims memory (Java/Python)
  - Destructor runs (C++)
  - Memory returned to system

## Java Object Lifecycle

```
class Person {
    String name; // null default

    Person(String name) { // Constructor
        this.name = name;
    }

    @Override
    protected void finalize() throws Throwable {
        // Called before GC (deprecated, don't use!)
        System.out.println(name + " is being finalized");
    }
}

// Creation
Person p = new Person("Alice"); // Object created on heap

// Usage
System.out.println(p.name); // Using the object

// Ready for GC
p = null; // No more references, eligible for collection

// System.gc() hints (doesn't force)
```

```
// JVM decides when to actually collect
```

## Python Object Lifecycle

```
import gc

class Person:
    def __init__(self, name):
        self.name = name
        print(f"{name} created")

    def __del__(self):
        # Destructor - called when object is about to be destroyed
        print(f"{self.name} destroyed")

# Creation
p = Person("Alice") # "Alice created"

# Usage
print(p.name)

# Deletion
p = None # or del p
# __del__ called before GC

# Force collection (usually not needed)
gc.collect()
```

## C++ Object Lifecycle

```
class Person {
    string name;
public:
    Person(const string& n) : name(n) {
        cout << name << " constructed\n";
    }
    ~Person() {
        cout << name << " destroyed\n";
    }
};

int main() {
    // Stack object - auto cleanup
    Person p1("Alice"); // Constructed
} // "Alice destroyed" - automatic!
```

```
// Heap object - manual cleanup
Person* p2 = new Person("Bob"); // Constructed
delete p2; // "Bob destroyed" - manual!

// Smart pointer - automatic
auto p3 = make_unique<Person>("Charlie");
// "Charlie destroyed" when p3 goes out of scope!
```

---

## 4.6 Memory Management in Different Languages

### Java Memory Management

```
// JVM Heap Structure:
// -Xms256m (initial heap)
// -Xmx1024m (max heap)
// -XX:NewRatio=2 (old/new ratio)

public class MemoryDemo {
    // Static (class area) - lives for entire program
    static int staticCounter;

    public void method() {
        // Stack frame created for method call
        int local = 10; // On stack

        // Object on heap
        Object obj = new Object();
        // obj reference on stack, object on heap

        // When method returns:
        // - local is popped from stack
        // - obj eligible for GC (unless returned)
    }
}
```

### Python Memory Management

```
import sys

# Object allocation
x = object()

# Reference counting (immediate cleanup)
print(sys.getrefcount(x)) # Number of references
```



```

# Cycle detection for reference cycles
# gc module handles cycles that reference counting can't

# Memory view
import tracemalloc
tracemalloc.start()

# Your code here
tracemalloc.stop()

```

## JavaScript Memory Management

```

// V8 engine (Chrome, Node.js)
// Automatic garbage collection

let obj = { name: "test" }; // Object allocated
obj = null; // Eligible for GC

// Weak references (ES2021)
let weakRef = new WeakRef(obj);
WeakRef.deref() // Get object or undefined

// Memory leak examples in JS:
// 1. Forgotten intervals
// 2. Detached DOM nodes
// 3. Closures holding references

```

## Rust Ownership Model

```

// Rust: Ownership + Borrowing instead of GC

fn main() {
    let s1 = String::from("hello"); // s1 owns the string
    let s2 = s1; // s1 MOVES to s2, s1 no longer valid

    // s1.println(); // ERROR! s1 moved

    let s3 = String::from("world");
    let s4 = &s3; // Borrow (reference)
    println!("{}", s4); // s4 borrows s3

    // Borrow checker ensures no dangling references
    // Memory freed when owner goes out of scope (no GC!)
}

// Multiple ownership with Rc<T>

```

```
use std::rc::Rc;

let rc = Rc::new(String::from("shared"));
let rc2 = rc.clone(); // Reference count increases
// Dropped when last Rc is dropped
```

## Comparison Table

| Feature               | Java                     | Python               | C++                  | Rust                        |
|-----------------------|--------------------------|----------------------|----------------------|-----------------------------|
| GC Type               | Multiple algorithms      | Ref counting + cycle | Manual/RAII          | Ownership                   |
| Stack/Heap            | Both                     | Both                 | Both                 | Both                        |
| Memory Leaks          | Possible (retained refs) | Possible (refs)      | Possible (no delete) | Prevented by borrow checker |
| Deterministic cleanup | No                       | No                   | Yes (destructor)     | Yes (RAII)                  |
| Escape analysis       | Yes                      | Yes                  | Yes                  | Yes                         |

## 4.7 Performance and Tuning

### GC Tuning (Java Example)

```
# Common JVM flags:
java -Xms512m -Xmx2g # Heap size
-XX:+UseG1GC         # Use G1 collector
-XX:MaxGCPauseMillis=200 # Target max pause
-XX:+PrintGCDetails  # GC logging

# Output analysis:
# java -XX:+PrintGCApplicationStoppedTime
# java -XX:+PrintGCDetails -Xloggc:gc.log
```

### Memory Profiling Tools

```
// VisualVM (included in JDK)
// JConsole
// YourKit
// Java Flight Recorder

// Enable in code:
System.gc(); // Suggests GC (not guaranteed)
Runtime.getRuntime().freeMemory(); // Free memory
Runtime.getRuntime().totalMemory(); // Total memory
```

## Python Memory Profiling

```
import tracemalloc

tracemalloc.start()

# Your code
snapshot = tracemalloc.take_snapshot()
top_stats = snapshot.statistics('lineno')

for stat in top_stats[:10]:
    print(stat)

# Memory leak detection
import objgraph
objgraph.show_most_common_types(limit=10)
objgraph.find_refchain(objgraph.by_type('MyClass')[0])
```

## Best Practices

```
// DO:
- Create objects efficiently (avoid excessive allocation)
- Use primitive types when possible (no boxing)
- Clear references when done (set to null)
- Use try-with-resources for closeable resources
- Profile before optimizing GC settings

// DON'T:
- Create objects in loops unnecessarily
- Keep unnecessary references (leaks)
- Use System.gc() in production (use carefully)
- Prematurely optimize
```

---

## Practice Questions

**MCQ 1:** Where are instance variables stored in Java? - A) Stack - B) Heap - C) Static area - D) Code segment

**MCQ 2:** What does mark-and-sweep GC algorithm do? - A) Allocates memory in order - B) Marks reachable objects, sweeps the rest - C) Moves objects to reduce fragmentation - D) Counts references to objects

**MCQ 3:** In C++, which smart pointer provides shared ownership? - A) unique\_ptr - B) weak\_ptr - C) shared\_ptr - D) auto\_ptr

**MCQ 4:** What is a memory leak? - A) When too much memory is used - B) When allocated memory is not released - C) When GC runs too often - D) When stack overflows

**MCQ 5:** Which is NOT a common cause of memory leaks? - A) Forgetting to delete in C++ - B) Static references holding objects - C) Using try-with-resources - D) Collections that grow indefinitely

**Short Answer:** Explain why Python's reference counting cannot handle reference cycles. Give an example of a reference cycle.

**Short Answer:** What is the difference between stack and heap memory? When would you use each in OOP?

**Board Coding:** Write Java code that demonstrates a memory leak (a list that grows forever) and show how to fix it.

**Board Coding:** Write C++ code using smart pointers (`shared_ptr`) to manage memory safely, showing automatic cleanup.

**Oral Explanation:** Explain the generational garbage collection hypothesis and why it makes sense. What percentage of objects typically become garbage early?

**Oral Explanation:** Compare memory management in Java (automatic GC) vs C++ (manual with RAII/smart pointers). What are the trade-offs?

---

## Solutions

**MCQ 1:** B) Heap - instance variables live with the object on the heap

**MCQ 2:** B) Marks reachable objects, sweeps the rest - the classic mark-and-sweep algorithm

**MCQ 3:** C) `shared_ptr` - uses reference counting for shared ownership

**MCQ 4:** B) When allocated memory is not released - memory that is no longer reachable but not freed

**MCQ 5:** C) Using try-with-resources - this actually PREVENTS leaks by auto-closing resources!

**Short Answer 1:** Python's reference counting can't handle cycles because when objects reference each other, their count never reaches zero even if no external reference exists. Example: `a = Node(); b = Node(); a.next = b; b.next = a` - both have refcount 1 but are only reachable through each other. Python's cycle detector periodically finds and breaks these.

**Short Answer 2:** Stack is for local variables, fast LIFO access, automatic cleanup when method returns. Heap is for objects, slower random access, manual or GC cleanup. Use stack for short-lived simple data, heap for objects that persist across method calls or are large.

---

## Cheat-Sheet

| Concept                   | Key Points                               |
|---------------------------|------------------------------------------|
| <b>Stack</b>              | Fast, LIFO, local vars, auto cleanup     |
| <b>Heap</b>               | Slow, dynamic, objects, needs management |
| <b>GC</b>                 | Automatic memory reclamation             |
| <b>Reference counting</b> | Immediate (Python), can't handle cycles  |

| Concept                | Key Points                             |
|------------------------|----------------------------------------|
| <b>Mark and sweep</b>  | Marks reachable, sweeps garbage        |
| <b>Generational GC</b> | Young/old generations, efficient       |
| <b>RAII</b>            | Resource tied to object lifetime (C++) |
| <b>Smart pointers</b>  | auto-delete (unique/shared/weak)       |

## Review Checklist

- ☐ **Stack vs Heap:** Can you explain when objects are allocated where?
- ☐ **GC process:** Do you understand mark-sweep-generational?
- ☐ **Eligibility:** Can you identify when objects are garbage?
- ☐ **Memory leaks:** Do you know common leak patterns?
- ☐ **Manual management:** Can you contrast C++ RAII vs Java GC?
- ☐ **Smart pointers:** Do you know unique vs shared vs weak?
- ☐ **Language differences:** Can you compare memory management approaches?
- ☐ **Performance:** Do you know basic GC tuning concepts? # Chapter 5: Program Structure

## 5.1 Packages and Compilation Units

### Definition / Theoretical Background

**Packages** (or **modules/namespaces**) are organizational units that group related classes, interfaces, and other types.

| Language | Unit Name | Purpose               |
|----------|-----------|-----------------------|
| Java     | package   | Group related classes |
| Python   | module    | Single .py file       |
| C#       | namespace | Group types           |
| C++      | namespace | Avoid name conflicts  |
| Go       | package   | Code organization     |

### Java Packages

```
// File: com/example/models/Student.java
package com.example.models; // Must be first statement

public class Student {
    private String name;
    // ...
}

// Directory structure:
/com/example/models/Student.java
```

### Package Naming Conventions

com.company.product.component

```
org.openSourceProject.module
edu.university.course

// Reverse domain name (avoids conflicts)
com.google.gson
org.apache.commons
```

## Import Statements

```
// Single type import
import com.example.models.Student;

// On-demand (wildcard) import
import com.example.models.*; // All types in package

// Static import (Java 5+)
import static java.lang.Math.PI;
import static java.lang.System.out;

out.println(PI); // Instead of System.out.println(Math.PI)
```

## Java Compilation Units

```
// Student.java (compilation unit)
/*
 * One public class per file (convention)
 * Can have multiple package-private classes
 */

package com.example; // Package declaration (0 or 1)

import java.util.*; // Import statements (0+)
import com.example.*; // (0+)

public class Student { // Public class MUST match filename
    // Class definition
}

class Helper { // Package-private, no more than one per file
    // ...
}
```

## Python Modules

```
# File: my_package/utils.py
# Package = directory with __init__.py
```

```

# my_package/__init__.py (optional, runs on import)
# my_package/utils.py

# In another file:
from my_package.utils import helper_function
from my_package import utils # utils is a module
import my_package

```

## C++ Namespaces

```

// Declaration
namespace com {
    namespace example {
        class MyClass { };
    }
}

// Usage
com::example::MyClass obj;

// Shorter:
using namespace com::example;
MyClass obj2;

```

## C# Namespaces and Assemblies

```

// Namespace declaration
namespace MyApplication.Models {
    public class User { }
}

// File organization
// MyApplication/Models/User.cs

// Assembly (DLL) = deployment unit
// Project references

```

---

## 5.2 Access Control Across Packages

### Java Access Modifiers Recap

| Modifier          | Same Class | Same Package | Subclass | World |
|-------------------|------------|--------------|----------|-------|
| private           | Yes        | No           | No       | No    |
| default (package) | Yes        | Yes          | No       | No    |

| Modifier  | Same Class | Same Package | Subclass | World |
|-----------|------------|--------------|----------|-------|
| protected | Yes        | Yes          | Yes      | No    |
| public    | Yes        | Yes          | Yes      | Yes   |

### Package-Private (Default) Access

```
// package com.example.internal
class InternalHelper { // Package-private
    void help(); // Accessible within com.example.internal only!
}

// Other classes in same package:
class Processor {
    void process() {
        InternalHelper h = new InternalHelper(); // OK - same package
    }
}

// From different package:
// import com.example.internal.*;
// InternalHelper h = new InternalHelper(); // ERROR! Not accessible!
```

### Protected Access Across Packages

```
// com.example.models.Parent
package com.example.models;

public class Parent {
    protected int value; // Accessible to subclasses AND same package
    protected void method() { }
}

// com.example.app.Child (subclass in different package)
package com.example.app;

import com.example.models.Parent;

class Child extends Parent {
    void access() {
        value = 10; // OK - subclass access
        method(); // OK - subclass access

        Parent p = new Parent();
        p.value = 10; // ERROR! Not subclass access, just reference
        // Cannot access protected member via instance outside class hierarchy
    }
}
```



```
}
```

## Java Module System (Java 9+)

```
// module-info.java
module com.example.app {
    requires com.example.models;    // Dependency
    exports com.example.app.ui;    // Public API
    exports com.example.app.api to com.example.external; // Qualified export
}
```

---

## 5.3 Classpath and Build Systems

### Java Classpath

```
# Compile with classpath
javac -cp "lib/*:." MyApp.java

# Run with classpath
java -cp "lib/*:." com.example.Main

# Common issue: ClassNotFoundException
# Cause: Wrong or missing classpath entry
```

### Build Tools Comparison

| Tool          | Format       | Use                                    |
|---------------|--------------|----------------------------------------|
| <b>Maven</b>  | pom.xml      | Dependency management, build lifecycle |
| <b>Gradle</b> | build.gradle | Kotlin/Groovy DSL, fast                |
| <b>Ant</b>    | build.xml    | Procedural, flexible                   |
| <b>Make</b>   | Makefile     | General purpose                        |

### Maven Project Structure

```
my-app/
+-- pom.xml
+-- src/
|   +-- main/
|       +-- java/
|           | +-- com/example/App.java
|           +-- resources/
|               +-- config.properties
+-- target/          # Compiled output
```

## Maven pom.xml Example

```
<?xml version="1.0" encoding="UTF-8"?>
<project>
  <groupId>com.example</groupId>
  <artifactId>my-app</artifactId>
  <version>1.0-SNAPSHOT</version>

  <dependencies>
    <dependency>
      <groupId>org.apache.commons</groupId>
      <artifactId>commons-lang3</artifactId>
      <version>3.12.0</version>
    </dependency>
  </dependencies>

  <properties>
    <maven.compiler.source>11</maven.compiler.source>
    <maven.compiler.target>11</maven.compiler.target>
  </properties>
</project>
```

## Gradle Example

```
// build.gradle
plugins {
    id 'java'
}

group = 'com.example'
version = '1.0'

repositories {
    mavenCentral()
}

dependencies {
    implementation 'org.apache.commons:commons-lang3:3.12.0'
    testImplementation 'org.junit.jupiter:junit-jupiter:5.8.2'
}

java {
    sourceCompatibility = JavaVersion.VERSION_11
    targetCompatibility = JavaVersion.VERSION_11
}
```

---

## 5.4 Program Structure Principles

### Single Responsibility Principle

```
// BAD - One class does too much
class User {
    void login() { }
    void saveToDatabase() { }
    void sendEmail() { }
    void generateReport() { }
}

// GOOD - Each class has one responsibility
class AuthService { void login() { } }
class UserRepository { void save() { } }
class EmailService { void send() { } }
class ReportGenerator { void generate() { } }
```

### Open/Closed Principle

```
// Open for extension, Closed for modification

// BAD - Adding new shape requires modifying AreaCalculator
class AreaCalculator {
    double calculateArea(Object shape) {
        if (shape instanceof Circle) { /*...*/ }
        if (shape instanceof Square) { /*...*/ }
        // New shape = modify this class!
    }
}

// GOOD - Use polymorphism, class is closed for modification
interface Shape {
    double area();
}

class Circle implements Shape {
    double r;
    public double area() { return Math.PI * r * r; }
}

class Square implements Shape {
    double side;
    public double area() { return side * side; }
}

class AreaCalculator {
    double calculate(Shape shape) {
```

```

        return shape.area(); // Closed for modification!
    }
}

```

## Liskov Substitution Principle

```

// Subclass should be substitutable for base class

// BAD - Rectangle extending Square
class Rectangle {
    protected int width, height;
    void setWidth(int w) { width = w; }
    void setHeight(int h) { height = h; }
}

class Square extends Rectangle {
    @Override
    void setWidth(int w) {
        super.setWidth(w);
        super.setHeight(w); // Breaks Rectangle contract!
    }
}

// If code expects Rectangle, Square misbehaves!

```

## Dependency Inversion

```

// Depend on abstractions, not concretions

// BAD - High-level depends on low-level
class Database {
    void save(User u) { /* mysql */ }
}

class UserService {
    private Database db = new Database(); // Tight coupling!
}

// GOOD - Depend on interface
interface Storage {
    void save(Object obj);
}

class UserService {
    private Storage storage; // Depends on abstraction
    UserService(Storage storage) { this.storage = storage; }
}

```

```

}

class MySQLStorage implements Storage { /*...*/ }
class MongoStorage implements Storage { /*...*/ }

```

---

## 5.5 Dependency Injection and IoC

What is IoC?

**Inversion of Control** - Frameworks call your code, not the other way around.

Traditional:

Application code calls framework code

With IoC:

Framework calls your code (you provide behavior, framework orchestrates)

### Dependency Injection (DI)

```

// WITHOUT DI - tight coupling
class OrderService {
    private PaymentProcessor processor = new PaymentProcessor();
    private EmailSender sender = new EmailSender();
    // ...
}

// WITH DI - loosely coupled
class OrderService {
    private PaymentProcessor processor;
    private EmailSender sender;

    // Constructor injection
    OrderService(PaymentProcessor processor, EmailSender sender) {
        this.processor = processor;
        this.sender = sender;
    }
}

// Framework (Spring) injects dependencies
@Service
class OrderService {
    @Autowired
    private PaymentProcessor processor;
}

```

## DI Types

```
// 1. Constructor injection (recommended)
class Service {
    private Dependency dep;
    Service(Dependency dep) { this.dep = dep; }
}

// 2. Setter injection
class Service {
    private Dependency dep;
    @Autowired
    void setDep(Dependency dep) { this.dep = dep; }
}

// 3. Interface injection
interface Injectable {
    void inject(Dependency dep);
}

class Service implements Injectable {
    public void inject(Dependency dep) { /* ... */ }
}
```

## Factory Pattern

```
// Factory creates objects for you
class DogFactory {
    static Dog create(String name, int age) {
        // Can add validation, caching, etc.
        return new Dog(name, age);
    }
}

Dog d = DogFactory.create("Buddy", 3);
```

## Service Locator Pattern

```
// Service locator (alternative to DI)
class ServiceLocator {
    private static ServiceLocator instance;
    private Map<Class<?>, Object> services = new HashMap<>();

    static void register(Class<?> type, Object service) {
        services.put(type, service);
    }
}
```

```

    @SuppressWarnings("unchecked")
    static <T> T get(Class<T> type) {
        return (T) services.get(type);
    }
}

// Usage
ServiceLocator.register(Database.class, new MySQLDatabase());
Database db = ServiceLocator.get(Database.class);

```

## 5.6 Program Structure Examples

### Layered Architecture

```

+-----+
|          PRESENTATION LAYER          |
|          (UI, Controllers, Views)    |
+-----+
|          SERVICE LAYER                |
|          (Business Logic, Transactions)|
+-----+
|          REPOSITORY LAYER             |
|          (Data Access, Database)      |
+-----+
|          DATA SOURCE                 |
|          (Database, Files, APIs)      |
+-----+

```

// Each layer only talks to layer directly below it  
// UserUI -> UserService -> UserRepository -> Database

### MVC Pattern

```

// Model - Data and business logic
class User {
    private String name;
    public boolean isValid() { return name != null; }
}

// View - Presentation (HTML, JSON, etc)
class UserView {
    void render(User user) {
        System.out.println("Name: " + user.getName());
    }
}

```

```
// Controller - Mediates input and Model
class UserController {
    private User model;
    private UserView view;

    UserController(User model, UserView view) {
        this.model = model;
        this.view = view;
    }

    void updateName(String name) {
        model.setName(name);
        view.render(model);
    }
}
```

### Package by Feature


```
com.example.app
+-- user/                # Feature package
|   +-- User.java
|   +-- UserService.java
|   +-- UserRepository.java
|   +-- UserController.java
+-- order/               # Another feature
|   +-- Order.java
|   +-- OrderService.java
|   +-- OrderController.java
+-- shared/              # Shared utilities
    +-- DateUtils.java
```

### Package by Layer (Traditional)

```
com.example.app
+-- models/              # All domain objects
|   +-- User.java
|   +-- Order.java
+-- services/            # All services
|   +-- UserService.java
|   +-- OrderService.java
+-- repositories/        # All data access
|   +-- UserRepository.java
|   +-- OrderRepository.java
+-- controllers/         # All controllers
    +-- UserController.java
    +-- OrderController.java
```



## Microservices Architecture

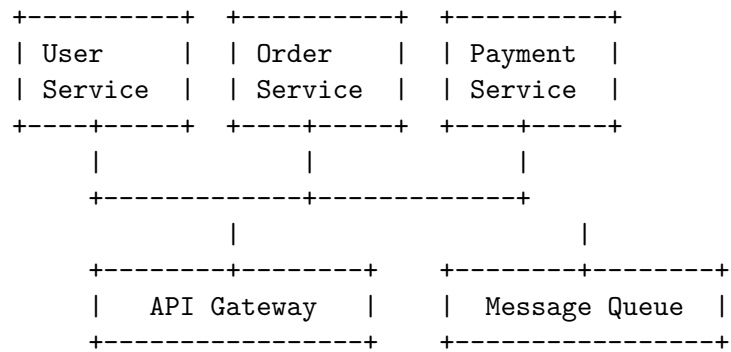

## 5.7 Compilation and Execution Process

### Java Compilation and Execution

```
# Source file
# MyApp.java
public class MyApp {
    public static void main(String[] args) {
        System.out.println("Hello!");
    }
}

# Compile (produces .class bytecode)
javac MyApp.java

# Run (JVM interprets bytecode)
java MyApp

# Directory structure created:
# MyApp.java -> MyApp.class
```

### Java Build Lifecycle

```
# Maven phases:
mvn clean          # Delete target/
mvn compile        # Compile source
mvn test           # Run tests
mvn package        # Create JAR
mvn install        # Install to local repo
mvn deploy         # Deploy to remote repo

# Full build:
mvn clean package
```

## Python Execution

```
# Interpreted (no compile step needed)
python script.py

# Compile to bytecode (.pyc)
python -m py_compile script.py

# Or run directly
python script.py # Compiles automatically to __pycache__
```

## C++ Compilation Process

```
# Preprocess -> Compile -> Assemble -> Link -> Executable
# Source.cpp -> Source.i -> Source.s -> Source.o -> a.out

# Compile:
g++ -c main.cpp           # Creates main.o (object file)
g++ -c utils.cpp          # Creates utils.o

# Link:
g++ main.o utils.o -o app # Creates executable

# Single command:
g++ main.cpp utils.cpp -o app
```

## Classpath Resolution

```
// JVM searches classpath in order:
// 1. Bootstrap classes (java.lang, etc.)
// 2. Extension classes (jre/lib/ext)
// 3. User classpath

// Classpath entry types:
# Directory
-classpath /path/to/classes

# JAR file
-classpath /path/to/lib.jar

# Current directory
-classpath .

# Wildcard (all JARs in directory)
-classpath lib/*

# Multiple entries (colon on Unix, semicolon on Windows)
```

```
-classpath /classes:/libs/*.jar
```

---

## 5.8 Best Practices and Anti-Patterns

### Good Structure Practices

```
// 1. Keep related classes together
// Package by feature, not by type

// 2. Minimize dependencies between packages
// Acyclic Dependency Principle: No circular dependencies!

// 3. Use interfaces to decouple
interface Repository {
    void save(User user);
}

// 4. Follow naming conventions
// packages: lowercase (com.example.app)
// classes: PascalCase (UserService)
// methods: camelCase (saveUser)
// constants: UPPER_SNAKE_CASE (MAX_SIZE)
```

### Anti-Patterns


```
// GOD CLASS - Does everything
class App {
    void handleUser() { }
    void handleOrder() { }
    void generateReport() { }
    // 5000 lines of code!
}

// LAZY CLASS - Does almost nothing
class UserManager extends SuperUserManager {
    void addUser(String name) { super.addUser(name); }
}

// DEPENDENCY HELL - Many conflicting versions
// ProjectA needs LibraryX v1.0
// ProjectB needs LibraryX v2.0
// Cannot have both on classpath!

// CIRCULAR DEPENDENCY
// A uses B, B uses C, C uses A
```

## Package Dependencies (Clean Architecture)

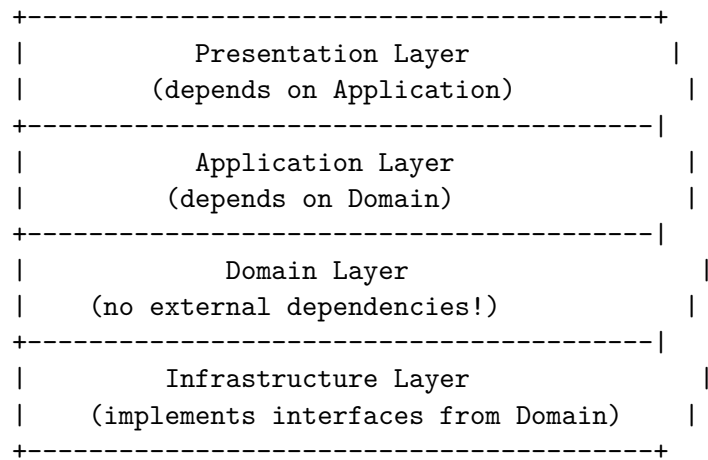

## Cheat-Sheet

| Concept                     | Key Points                               |
|-----------------------------|------------------------------------------|
| <b>Package</b>              | Groups related types, provides namespace |
| <b>Import</b>               | Bring types into scope                   |
| <b>Classpath</b>            | Where JVM looks for classes              |
| <b>Maven/Gradle</b>         | Build and dependency management          |
| <b>SRP</b>                  | Single Responsibility Principle          |
| <b>DI</b>                   | Dependency Injection, loose coupling     |
| <b>IoC</b>                  | Framework controls execution flow        |
| <b>Layered architecture</b> | UI, Service, Repository layers           |

## Edge Cases & Traps

### Trap 1: Circular Dependencies Between Packages

```
// Package A depends on Package B
package com.app.users;
import com.app.orders.OrderService; // From Package B!

// Package B depends on Package A
package com.app.orders;
import com.app.users.UserService; // From Package A!

// Circular! Build fails!
// Fix: Extract shared interface into third package
```

[WARNING] **Professor Trap:** Circular dependencies between packages cause build failures!

### Trap 2: Wildcard Import vs Specific Import

```
import java.util.*; // Imports ALL of java.util
import java.util.List; // Imports specifically List

// But both compile the same
// Wildcard doesn't hurt performance (compile-time only)
// But can cause confusion about what's available
```

[WARNING] **Professor Trap:** `import java.util.*` doesn't import subpackages!

### Trap 3: Package-Private Access Confusion

```
// In com.example.internal
class Helper { // Package-private!
    void help() { }
}

// In com.example.app (different package)
class User {
    Helper h; // ERROR! Can't access package-private class
}

// But if in SAME package:
class Processor {
    Helper h; // OK! Same package
}
```

[WARNING] **Professor Trap:** Protected is NOT the same as package-private in Java!

### Trap 4: Modifying a Shared Dependency

```
// Your library version 1.0
class User {
    public String name; // public! Bad practice!
}

// User of library does:
user.name = "HACKED"; // Modifies internal state!

// If name was private with only getter, this wouldn't happen
```

### Trap 5: God Class (One Class to Rule Them All)

```
class DatabaseManager { // Does everything!
    void connect() { }
    void disconnect() { }
    void query() { }
    void backup() { }
    void restore() { }
    void optimize() { }
    // 5000 lines later...
```

```

}

// Should be split into: ConnectionManager, QueryManager,
// BackupManager, etc.

```

[WARNING] **Professor Trap:** A class over 1000 lines is likely a God class!

### Trap 6: Violating Single Responsibility

```

// This class has TWO reasons to change:
// 1. User data storage changes
// 2. Email sending changes
class UserService {
    void saveUser(User u) { /* database */ }
    void sendEmail(User u, String msg) { /* email */ }
    void generateReport(User u) { /* report */ }
}

// Should be split:
// UserService (save only)
// EmailService (send only)
// ReportService (generate only)

```

[WARNING] **Professor Trap:** If you use “and” to describe a class’s responsibility, it’s doing too much!

### Trap 7: Classpath Order Matters

```

# If two jars have the same class:
java -cp lib/v1/old.jar:lib/v2/new.jar MyApp
# JVM uses FIRST match in classpath!
# old.jar's class is loaded, new.jar is ignored!

```

[WARNING] **Professor Trap:** Classpath order determines which class loads first!

---

## Practice Questions

**MCQ 1:** What access modifier makes a class accessible only within its package? - A) private - B) protected - C) default (no modifier) - D) public

**MCQ 2:** Which is NOT a SOLID principle? - A) Single Responsibility - B) Open/Closed - C) Liskov Substitution - D) Dependency Installation

**MCQ 3:** In Maven, which phase compiles the source code? - A) clean - B) compile - C) test - D) package

**MCQ 4:** What is Inversion of Control (IoC)? - A) Control statements run faster - B) Framework calls your code, not vice versa - C) Objects control their own lifecycle - D) Package dependencies are inverted

**MCQ 5:** Which anti-pattern describes a class doing too much? - A) Lazy Class - B) God Class - C) DTO - D) Value Object

**Short Answer:** Explain the difference between `import java.util.*` and `import java.util.List`. When would you use each?

**Short Answer:** What is the Liskov Substitution Principle? Give an example of a violation.

**Board Coding:** Draw the layered architecture diagram and explain what each layer does.

**Board Coding:** Write Maven pom.xml with dependencies for JUnit and Apache Commons.

**Oral Explanation:** Compare package-by-feature vs package-by-layer. When would you choose each?

---

## Solutions

**MCQ 1:** C) default (no modifier) - package-private access

**MCQ 2:** D) Dependency Installation - should be Dependency Inversion

**MCQ 3:** B) compile - compiles source to target/classes

**MCQ 4:** B) Framework calls your code - Spring/Angular etc. use IoC

**MCQ 5:** B) God Class - one class doing everything

**Short Answer 1:** `import java.util.*` imports all classes in util package. `import java.util.List` imports only List. Use specific imports for clarity, wildcard for convenience when using many classes from a package.

**Short Answer 2:** LSP: Objects of subclass should be substitutable for base class. Violation: Square extending Rectangle where `setWidth()` and `setHeight()` have side effects on each other.

---

## Review Checklist

- ☐ **Packages:** Can you organize classes into proper packages?
- ☐ **Access control:** Do you understand package-private vs protected?
- ☐ **Classpath:** Can you troubleshoot `ClassNotFoundException`?
- ☐ **Build tools:** Do you know Maven/Gradle basics?
- ☐ **SOLID principles:** Can you explain each one?
- ☐ **Dependency injection:** Can you explain constructor vs setter injection?
- ☐ **Architecture:** Can you draw layered architecture diagram?
- ☐ **Anti-patterns:** Do you recognize God class, lazy class?