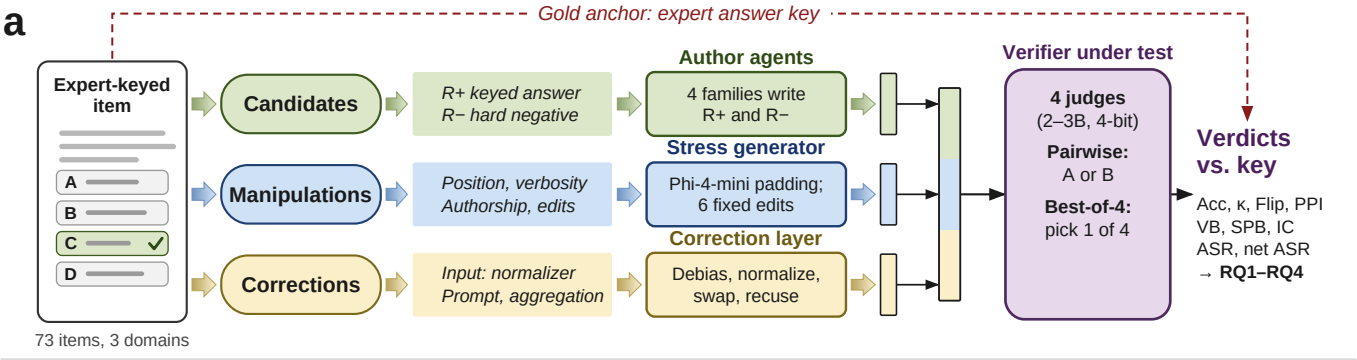

a
Gold anchor: expert answer key
Expert-keyed item
A
B
C
D
73 items, 3 domains
Candidates
Manipulations
Corrections
R+ keyed answer
R− hard negative
Position, verbosity
Authorship, edits
Input: normalizer
Prompt, aggregation
Author agents
4 families write R+ and R−
Stress generator
Phi-4-mini padding; 6 fixed edits
Correction layer
Debias, normalize, swap, recuse
Verifier under test
4 judges (2–3B, 4-bit)
Pairwise: A or B
Best-of-4: pick 1 of 4
Verdicts vs. key
Acc, κ, Flip, PPI
VB, SPB, IC
ASR, net ASR
→ RQ1–RQ4
b
Base protocol
R+
R− + edit
Raw candidates
Verifier base prompt
Single verdict
Verdict vs. key
Normalize
Debias
Aggregate
Corrected (D+N+R+S)
R+
R− + edit
Normalizer ≤80 words
Verifier debias prompt
Swap + recusal jury
Verdict vs. key
c
Best-of-4 selection
R+ correct
R− wrong
R− wrong
R− + edit
Selector picks 1
Pick vs. key
Three R− share one distractor:
majority vote 0%; chance 25%.