

PES UNIVERSITY

(Established under Karnataka Act No. 16 of 2013)

100 Feet Ring Road, BSK III Stage, Bengaluru-560 085

Department of Computer Science & Engineering

Topic: Phonebook

Team Members

PES1UG21CS574 – Shreya Mishra

PES1UG21CS603 - Skanda Shreesha Prashad

PES1UG21CS598 - Isham Sinha



ABSTRACT

A phone book is a collection of the data required to contact certain individuals such as their name, phone numbers, address, email, etc. We have created a virtual phone book using Python. The user has to input the data in the various fields present and the project converts them into a list. Graphical User Interface has been added using Tkinter and various concepts such as importing functions from another file, timestamp, etc., have been used. The project was made using PyCharm and Visual Studio Code.



TABLE OF CONTENTS

Sl. No.	Topic	Page Number
1.	Introduction	4
2.	Implementation	5 – 90
3.	Testing	91
4.	Result	92 – 99
5.	Analysis	100
6.	Conclusion	101
7.	Future Enhancements	102
8.	References	103



INTRODUCTION

Our project is a virtual phonebook, based on the Yellow Pages and physical Telephone Directories that were commonly available. We intend to create a virtual version of the Telephone Directory, containing all possible means of contacting any given person.

The project allows the user to create contacts, modify or delete a particular contact, segregate them into seven different groups, search a specific person based on any detail, and also delete all contacts in one go. All the contacts are stored alphabetically, irrespective of the time they have been added. This has been done to ensure that they are easily readable by a person. The project has a user-friendly interface with easily recognisable icons for visual memory, if they are going to use it on a long-term basis. The application also has a dark mode to light mode switch, where the user can change the colour of the background, font colours, etc., depending on their need and liking. The project also records the timestamp at which the person has been added. This serves as a unique code for each person.

The project upon opening shows a menu containing all the different options. Upon pressing 'Create Contact', the person has to enter the name of the person, at the most three phone numbers, their email, date of birth, address, category, and finally, designation. All of these data will be stored in a nested list.

We first created the basic structure of the project using list and string functions, without any Graphical User Interface. Graphical User Interface was later on added to the project using Tkinter. Tkinter is one of the standard GUI libraries in Python. We have used Tkinter to add the background colour, message boxes, title, buttons, etc.

For the ease of programming and reading source code, we have divided the entire project into 4 different files and we have imported the functions of one file to another in order to access them. The different inbuilt modules used are sys, Datetime, Tkinter, etc.



FILE 1:

IMPLEMENTATION

```
#Dark Mode
from tkinter import *
from function import *
from tkinter import messagebox as mb
#"#7575a3" = light gray for labels
#"#3d3d5c" = dark gray for buttons
#"#9494b8" = bg
#"#1f1f2e"=form
#main window
root = Tk()
root.title("Phone Book")
root.geometry("1200x700")
root.minsize(1200,700)
root.iconbitmap("calltelephoneauricularincircularbutton 80086.ico")
root.configure(bg="#9494b8")
c l=Label(text="copyright 2022",bg="#3d3d5c",
  fg="white",
  font=("Calibre", 10)
  ).pack(side=BOTTOM,fill=X,anchor=NW)
Title label= Label(
```



```
text="PHONEBOOK",relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibre", 30,"
bold"),borderwidth=10
).pack(side=TOP,fill=X)
welcome_label= Label(
  text="""Hello user, \n
Welcome to the smartphone phonebook""",
relief=SUNKEN,borderwidth=2,bg="#9494b8",fg="black",font=("Calibre", 10),pady=1,
).pack(anchor=N,side=TOP,fill=X)
create img=PhotoImage(file="D:\\phone.py\icons8-add-96.png")
p = create_img.subsample(2,2)
create contact=Button(root,
  text=" Create Contact",
  image=p,
  font=("Times New Roman",14,"bold"),
  command=createContact,
  compound=LEFT,
  bg="#3d3d5c",
  fg="white"
  ).pack(fill=X,pady=5)
all img=PhotoImage(file="D:\\phone.py\icons8-contacts-80.png")
p1 = all img.subsample(2,2)
all contacts=Button(
  root,
```



```
text=" All Contacts",
  font=("Times New Roman",14,"bold"),
  command=allContacts,
  bg="#3d3d5c",
  fg="white",
  image=p1,
  compound=LEFT,
  ).pack(fill=X,pady=5)
search_img=PhotoImage(file="D:\phone.py\icons8-search-128.png")
p2 = search_img.subsample(3,3)
search contact=Button(
  root,
  text=" Search Contact",
  font=("Times New Roman",14,"bold"),
  command=searchContact,
  bg="#3d3d5c",
  fg="white",
  image=p2,
  compound=LEFT,
  ).pack(fill=X,pady=5)
group_img=PhotoImage(file="D:\\phone.py\icons8-group-96.png")
p3 = group_img.subsample(2,2)
see groups=Button(
  root,
  text=" Groups",
```



```
font=("Times New Roman",14,"bold"),
  command=manageGroups,
  bg="#3d3d5c",
  fg="white",
  image=p3,
  compound=LEFT,
  ).pack(fill=X,pady=5)
dummy_img=PhotoImage(file="D:\\phone.py\icons8-data-sheet-80.png")
p4 = dummy img.subsample(2,2)
data dummy=Button(
  root,
  text=" Add Sample Data",
  font=("Times New Roman",14,"bold"),
  command=dummyData,
  bg="#3d3d5c",
  fg="white",
  image=p4,
  compound=LEFT,
  ).pack(fill=X,pady=5)
delete_img=PhotoImage(file="D:\phone.py\icons8-delete-300.png")
p5 = delete img.subsample(6,6)
delete contact=Button(
  root,
  text=" Delete All Contacts",
```



```
command=deleteallContact,
  font=("Times New Roman",14,"bold"),
  bg="#3d3d5c",
  fg="white",
  image=p5,
  compound=LEFT,
  ).pack(fill=X,pady=5)
exit_img=PhotoImage(file="D:\phone.py\icons8-exit-256.png")
p6 = exit_img.subsample(6,6)
exit prg=Button(
  root,
  text=" Exit",
  font=("Times New Roman",14,"bold"),
  command=exit_prg,
  bg="#3d3d5c",
  fg="white",
  image=p6,
  compound=LEFT,
  ).pack(fill=X,pady=5)
mode_prg=Button(
  root,
  text=" Convert to Light Mode",
  font=("Times New Roman",14,"bold"),
  command=lambda:[root.destroy(),light mode()],
```



PHONEBOOK

```
bg="#3d3d5c",
fg="white",
).pack(fill=X,pady=5)
```

root.mainloop()



FILE 2:

```
#Light Mode
from tkinter import *
from function2 import *
from tkinter import messagebox as mb
#"#CBF7F3" = heading labels
#"#9ccefa" = buttons
#"#CED9F7" = bg
#"#c3e8e2"=form
#"#b8cde0"= Ask Skanda
root= Tk() #main window
root.title("Phone Book")
root.geometry("1200x700")
root.minsize(1200,700)
root.iconbitmap("calltelephoneauricularincircularbutton_80086.ico")
root.configure(bg="#CED9F7")
c l=Label(text="Copyright 2022",bg="#b8cde0",
  fg="black",
  font=("Times New Roman", 10)
  ).pack(side=BOTTOM,fill=X,anchor=NW)
Title label= Label(
  text="Phonebook", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New Roman", 30,"
bold"),borderwidth=10
```



```
).pack(side=TOP,fill=X)
welcome label= Label(
  text="""Hello user, \n
Welcome to the Smartphone Phonebook""",
relief=SUNKEN,borderwidth=2,bg="#CED9F7",fg="black",font=("Times New Roman", 10),pady=1,
).pack(anchor=N,side=TOP,fill=X)
create_img=PhotoImage(file="D:\phone.py\icons8-add-96.png")
p = create_img.subsample(2,2)
create_contact=Button(root,
  text=" Create Contact",
  image=p,
  font=("Times New Roman",14,"bold"),
  command=createContact,
  compound=LEFT,
  bg="#9ccefa",
  fg="black"
  ).pack(fill=X,pady=5)
all\_img=PhotoImage(file="D:\phone.py\icons8-contacts-80.png")
p1 = all img.subsample(2,2)
all contacts=Button(
  root,
            All Contacts",
  text="
  font=("Times New Roman",14,"bold"),
```



```
command=allContacts,
  bg="#9ccefa",
  fg="black",
  image=p1,
  compound=LEFT,
  ).pack(fill=X,pady=5)
search img=PhotoImage(file="D:\phone.py\icons8-search-128.png")
p2 = search_img.subsample(3,3)
search contact=Button(
  root,
  text=" Search Contact",
  font=("Times New Roman",14,"bold"),
  command=searchContact,
  bg="#9ccefa",
  fg="black",
  image=p2,
  compound=LEFT,
  ).pack(fill=X,pady=5)
group_img=PhotoImage(file="D:\phone.py\icons8-group-96.png")
p3 = group_img.subsample(2,2)
see_groups=Button(
  root,
  text="
                 Groups",
  font=("Times New Roman",14,"bold"),
  command=manageGroups,
```



```
bg="#9ccefa",
  fg="black",
  image=p3,
  compound=LEFT,
  ).pack(fill=X,pady=5)
dummy img=PhotoImage(file="D:\phone.py\icons8-data-sheet-80.png")
p4 = dummy img.subsample(2,2)
data_dummy=Button(
  root,
  text=" Add Sample Data",
  font=("Times New Roman",14,"bold"),
  command=dummyData,
  bg="#9ccefa",
  fg="black",
  image=p4,
  compound=LEFT,
  ).pack(fill=X,pady=5)
delete_img=PhotoImage(file="D:\phone.py\icons8-delete-300.png")
p5 = delete img.subsample(6,6)
delete contact=Button(
  root,
  text="
           Delete All Contacts",
  command=deleteallContact,
  font=("Times New Roman",14,"bold"),
```



```
bg="#9ccefa",
  fg="black",
  image=p5,
  compound=LEFT,
  ).pack(fill=X,pady=5)
exit img=PhotoImage(file="D:\phone.py\icons8-exit-256.png")
p6 = exit img.subsample(6,6)
exit_prg=Button(
  root,
  text="
               Exit",
  font=("Times New Roman",14,"bold"),
  command=exit_prg,
  bg="#9ccefa",
  fg="black",
  image=p6,
  compound=LEFT,
  ).pack(fill=X,pady=5)
mode prg=Button(
  root,
  text=" Convert to Dark Mode",
  font=("Times New Roman",14,"bold"),
  command=lambda:[root.destroy(),dark_mode()],
  bg="#9ccefa",
  fg="black",
```



PHONEBOOK

).pack(fill=X,pady=5)

root.mainloop()



```
FILE 3:
```

```
from tkinter import *
from tkinter import messagebox as mb
from tkinter import ttk
from types import NoneType
import datetime
import sys
phonebook=[]
#for creating Tkobject
def object(t,g,min,bg):
  r=Tk()
  a,b=min
  r.title(t)
  r.geometry(g)
  r.iconbitmap("calltelephoneauricularincircularbutton 80086.ico")
  r.minsize(a,b)
  r.c onfigure(bg=bg)
  return r
#createContact is used to create new contact.
def createContact():
  r= object("Create Contact", "1100x600",(1100,600),"#7575a3")
  Title= Label(r,
  text="Create Contact",
relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),borderwidth=10
```



```
).pack(side=TOP,fill=X)
name_var=StringVar(master=r)
phone_var=StringVar(master=r)
phone2_var=StringVar(master=r)
phone3_var=StringVar(r)
email_var=StringVar(r)
dob_var=StringVar(r)
group_var=StringVar(r)
profession_var=StringVar(r)
address_var=StringVar(r)
def submit():
  c=0
  unique_id = str(datetime.datetime.now())
  name=name_var.get()
  phone=phone_var.get()
  if phone2 var!=NoneType:
    phone2=phone2_var.get()
    phone2_var.set("")
  else:
    phone2=""
  if phone3_var!=NoneType:
    phone3=phone3 var.get()
    phone3_var.set("")
```



```
else:
  phone3=""
email=email_var.get()
dob=dob_var.get()
group=group var.get()
address_var.get()
profession= profession_var.get()
#validating
if phone!="":
  if not(phone.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
    c=1
if email!="":
  if not('@' in email):
     mb.showerror("Invalid Email", "Invalid Email")
    r.destroy()
    c=1
if phone2 !="":
  if not(phone2.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
     c=1
if phone3!="":
  if not(phone3.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
```



```
c=1
    if dob!="":
       if len(dob)!=10 and not("/" in dob):
         mb.showerror("Invalid Date of Birth Format", "Invalid Date of Birth Format")
         r.destroy()
         c=1
    if profession!="":
       if not profession.isalpha():
         mb.showerror("Profession Can't contain digits or special characters", "Profession Can't
contain digits or special characters")
         r.destroy()
         c=1
    if c==0:
phonebook.append([name,phone2,phone3,email,dob,group,address,profession,unique_id])
       mb.showinfo("Contact Created", "The Contact is Successfully Created")
       r.destroy()
    name var.set("")
    phone var.set("")
    email_var.set("")
    dob_var.set("")
    group var.set("")
    address var.set("")
    profession var.set("")
    print(phonebook)
```





```
def add2ndnum():
    nonlocal phone2_var

phone2_label=Label(r,
    text="Number 2:",
    font =("Times New Roman",15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
    phone2_entry=Entry(r,width=60,textvariable=phone2_var,).pack(side=TOP,anchor=N,padx=100)

add=Button(r,
    text="ADD THIRD NUMBER",
    command=add3rdnum,
    font=("Times New Roman",15,"bold"),
    bg="#3d3d5e",
    fg="white",).pack(side=TOP,anchor=N,fill=X,padx=200)
```



```
def add3rdnum():
  nonlocal phone3_var
  phone3_label=Label(r,
  text="Number 3:",
  font =("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone3_entry=Entry(r,width=60,textvariable=phone3_var,).pack(side=TOP,anchor=N,padx=100)
sub=Button(r,
  text="Submit",
  command=submit,
  bg="#3d3d5c",
  font=("Times New Roman",15,"bold"),
  pady=8,
  fg="white",
  relief=GROOVE,
  )
sub.pack(side=TOP,anchor=N, fill=X,padx=200,pady=9)
```



```
phone2 var.set("")
  phone3 var.set("")
  name_label=Label(r,
  text="Name:",
  font = ("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  name entry=Entry(r,width=100,textvariable=name var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  phone_label=Label(r,
  text="Number 1:",
  font = ("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone entry=Entry(r,width=60,textvariable=phone var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  add=Button(r,
    text="ADD SECOND NUMBER",
    command=add2ndnum,
    font=("Times New Roman", 15, "bold"),
    bg="#3d3d5c",
    fg="white",).pack(side=TOP,anchor=N,fill=X,padx=200)
  email label=Label(r,text="Email:",
```



```
font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  email entry=Entry(r,width=100,textvariable=email var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  dob label=Label(r,text="Date of birth(DD/MM/YYYY):",
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  dob entry=Entry(r,width=50,textvariable=dob var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
category label=Label(r,text="Category(Family/Friends/Work/Favorite/Emergency/Important/Others):"
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  category entry=Entry(r,width=60,textvariable=group var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  address label=Label(r,text="Address:",
    font = ("Times New Roman", 15),
```



```
bg="#1f1f2e",
     fg="white",
     ).pack(side=TOP,anchor=N,fill=X,padx=100)
  address entry=Entry(r,width=60,textvariable=address var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  profession label=Label(r,text="Designation:",
     font = ("Times New Roman", 15),
     bg="#1f1f2e",
     fg="white",
     ).pack(side=TOP,anchor=N,fill=X,padx=100)
  profession entry=Entry(r,width=60,textvariable=profession var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  r.mainloop()
#editing the contact
def editContact(i,t,t1):
  r= object("Edit Contact", "1100x600",(1100,600),"#7575a3")
  Title= Label(r,
  text="Edit Contact",
  relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),borderwidth=
  ).pack(side=TOP,fill=X)
  i[1]=str(i[1])
  i[2]=str(i[2])
  i[3] = str(i[3])
  name var=StringVar(master=r)
  phone var=StringVar(master=r)
  phone2 var=StringVar(master=r)
```





```
phone3_var=StringVar(r)
email var=StringVar(r)
dob_var=StringVar(r)
group_var=StringVar(r)
profession_var=StringVar(r)
address_var=StringVar(r)
def submit():
  c=0
  unique_id = i[9]
  name=name_var.get()
  phone=phone_var.get()
  if phone2_var!=NoneType:
    phone2=phone2_var.get()
    phone2_var.set("")
  else:
    phone2=""
  if phone3_var!=NoneType:
    phone3_phone3_var.get()
    phone3_var.set("")
  else:
    phone3=""
  email=email_var.get()
  dob=dob var.get()
  group=group var.get()
  address_var.get()
```



```
profession=profession var.get()
d=phonebook.index(i)
#validating
if phone!="":
  if not(phone.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
    c=1
if email!="":
  if not('@' in email):
     mb.showerror("Invalid Email", "Invalid Email")
    r.destroy()
    c=1
if phone2 !="":
  if not(phone2.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
     c=1
if phone3!="":
  if not(phone3.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
     c=1
if dob!="":
  if len(dob)!=10 and not("/" in dob):
```



```
mb.showerror("Invalid Date of Birth Format", "Invalid Date of Birth Format")
       r.destroy()
       c=1
  if profession!="":
    if not profession.isalpha():
       mb.showerror("Profession Can't contain digits or special characters", "Profession Can't
       contain digits or special characters")
       r.destroy()
       c=1
  if c==0:
    phonebook[d]=[name,phone,phone2,phone3,email,dob,group,address,profession,unique id]
    print(phonebook)
    mb.showinfo("Contact Updated", "The Contact is Successfully Updated")
    r.destroy()
  t.destroy()
  t1.destroy()
sub=Button(r,
  text="Update Contact",
  command=submit,
  bg="#3d3d5c",
  font=("Times New Roman", 15, "bold"),
  pady=8,
```



```
fg="white",
  relief=GROOVE,).pack(side=TOP,anchor=N,padx=200,pady=9)
name_var.set(i[0])
phone var.set(i[1])
phone2_var.set(i[2])
phone3_var.set(i[3])
email var.set(i[4])
dob_var.set(i[5])
group_var.set(i[6])
address_var.set(i[7])
profession var.set(i[8])
name label=Label(r,
text="Name:",
font = ("Times New Roman", 15),
bg="#1f1f2e",
fg="white",
).pack(side=TOP,anchor=N,fill=X,padx=100)
name entry=Entry(r,width=100,textvariable=name var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=1
00) phone label=Label(r,
text="Number 1:",
font = ("Times New Roman", 15),
bg="#1f1f2e",
fg="white",
).pack(side=TOP,anchor=N,fill=X,padx=100)
phone entry=Entry(r,width=60,textvariable=phone var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
```



```
phone2 label=Label(r,
  text="Number 2:",
  font =("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
phone2 entry=Entry(r,width=60,textvariable=phone2 var,).pack(side=TOP,anchor=N,padx=100)
phone3 label=Label(r,
  text="Number 3:",
  font = ("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
phone3 entry=Entry(r,width=60,textvariable=phone3 var,).pack(side=TOP,anchor=N,padx=100)
email_label=Label(r,text="Email:",
  font = ("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
email entry=Entry(r,width=100,textvariable=email var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100
) dob_label=Label(r,text="Date of
birth(DD/MM/YYYY):",
  font = ("Times New Roman", 15),
  bg="#1f1f2e",
  fg="white",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
dob entry=Entry(r,width=60,textvariable=dob var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
```



```
category label=Label(r,text="Category(Family/Friends/Work/Favorite/Emergency/Important/Others):"
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  category entry=Entry(r,width=60,textvariable=group var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  address label=Label(r,text="Address:",
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  address entry=Entry(r,width=100,textvariable=address var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  profession label=Label(r,text="Designation:",
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  profession entry=Entry(r,width=60,textvariable=profession var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  r.mainloop()
def delete(r1,r,i):
```



```
#i=phonebook.index(i)
r2=object("{} Contact Deleted".format(i[0]), "300x100",(300,100),"#7575a3")
r2.maxsize(300,100)
i[1]=str(i[1])
i[2]=str(i[2])
i[3]=str(i[3])
phonebook.remove(i)
Label(r2,text="Contact Deleted",padx=10,pady=10,bg="#1f1f2e",
font=("Times New Roman",15),
fg="white",relief=GROOVE).pack(side=TOP,anchor=CENTER,fill=X)
r1.destroy()
r.destroy()
Button(
  r2,
  text="OK",
  font=("Times New Roman",15,"bold"),
  bg="#1f1f2e",
  fg="white",
  command=r2.destroy
  ).pack(side=BOTTOM,anchor=S,fill=X,padx=10,pady=10)
r2.mainloop()
```



```
def open(i,r):
  r1=object( "{} Contact Info".format(i[0]), "500x500",(500,500), "#7575a3")
  Title=Label(r1,
  text="Contact Details",
relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),borderwidth=10
    ).pack(side=TOP,fill=X)
  Label(master=r1,
    text="Name: "+ i[0],
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
       pady=3).pack(fill=X,side=TOP)
  Label(r1,
       text="Number: "+str(i[1]),
       font = ("Times New Roman", 15),
       bg="#1f1f2e",
       fg="white",
       relief=SUNKEN,
       borderwidth=2,
       padx=10,
       pady=3,
       ).pack(fill=X,side=TOP)
  if str(i[2])!="":
```



```
Label(r1,
       text="Number 2 : "+str(i[2]),
      font = ("Times New Roman", 15),
      bg="#1f1f2e",
       fg="white",
       relief=SUNKEN,
       borderwidth=2,
       padx=10,
       pady=3,
       ).pack(fill=X,side=TOP)
if str(i[3])!="":
  Label(r1,
       text="Number 3 : "+str(i[3]),
       font =("Times New Roman", 15),
       bg="#1f1f2e",
       fg="white",
       relief=SUNKEN,
       borderwidth=2,
       padx=10,
       pady=3,
       ).pack(fill=X,side=TOP)
Label(r1,
    text="Email: "+str(i[4]),
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
```



```
borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Date of Birth : " +str(i[5]),
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Group: +i[6],
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
```

Label(r1,



```
text="Address: "+str(i[7]),
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Designation : " +str(i[8]),
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Timestamp: "+str(i[9]),
    font = ("Times New Roman", 15),
    bg="#1f1f2e",
    fg="white",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
```



```
pady=3,
    ).pack(fill=X,side=TOP)
,,,,,,
edit img=PhotoImage(r1,file="D:\phone.py\icons8-edit-40.png")
p6 = edit img.subsample(1,1)
delete1_img=PhotoImage(r1,file="D:\phone.py\icons8-delete-300.png")
p7 = delete1 img.subsample(6,6)
g img=PhotoImage(master=r1,file="D:\phone.py\icons8-delete-300.png")
i1 = g \text{ img.subsample}(6,6)
g1 img=PhotoImage(master=r1,file="D:\phone.py\icons8-edit-80.png")
i2 = g1_{img.subsample(2,2)}
Button(r1,
    text=" Edit Contact",
    command=lambda:[editContact(i,r,r1)],
    font=("Times New Roman",15),
    fg="white",
    bg="#3d3d5c",
    pady=5,
    image=i2,
    compound=LEFT,
    ).pack(side=BOTTOM,fill=X)
```



```
Button(r1,text= " Delete Contact",
       #way to send parameters
       #command=lambda:delete(r1),
       command=lambda:[delete(r1,r,i)],
       font=("Times New Roman",15),
       fg="white",
       bg="#3d3d5c",
       pady=5,
       #image=p7,
       #compound=LEFT,
       image=i1,
       compound=LEFT,
       ).pack(side=BOTTOM,fill=X)
  r1.mainloop()
def openList(l):
  r=object("Contacts","1100x600",(1100,600),"#7575a3")
  Title= Label(r,
  text="Contacts",
relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  create img=PhotoImage(master=r,file="D:\phone.py\icons8-add-96.png")
  p = create img.subsample(2,2)
  create contact=Button(r,
```



```
text=" Create Contact",
  image=p,
  font=("Times New Roman",14,"bold"),
  command=createContact,
  compound=LEFT,
  bg="#3d3d5c",
  fg="white"
  ).pack(padx=200,fill=X,pady=2)
  search_var=StringVar(r)
  def submit():
    global phonebook
    q=search_var.get()
    print(q,type(q))
    1=[]
    c=0
    for i in phonebook:
    print(i)
       if i[0].startswith(q) or i[0].endswith(q) or i[1] == q or i[2] == q or i[3] == q or i[4] == q or i[6] == q or
i[7].startswith(q) or i[7].endswith(q) or i[8] == q:
            l.append(i)
            c=1
       print("c=",c)
    if c==0:
```



```
mb.showinfo("No Contact Found", "No results found")
    elif c==1:
      r.destroy()
       openList(1)
  search label=Label(r,text="Search:",
    font = ("Times New Roman", 15, "bold"),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,pady=4)
  search entry=Entry(r,textvariable=search var,font = ('Times New
Roman', 10, 'normal'), width=100).pack(side=TOP, anchor=N)
  g1 img=PhotoImage(master=r,file="D:\phone.py\icons8-search-96.png")
  i2 = g1 img.subsample(3,3)
  Button(r,
    text=" Search",
    command=submit,
    bg="#3d3d5c",
    fg="white",
    font=("Times New Roman", 15, "bold"),
    padx=10,
    pady=5,
    image=i2,
    compound=LEFT
    ).pack(side=TOP,anchor=N,padx=200,fill=X,pady=2)
```



```
scroll bar = Scrollbar(r)
scroll bar.pack( side = RIGHT,
       fill = Y)
columns = ('name', 'phone number 1', "phone number 2", "phone number 3",
'email',"date of birth","group","address","profession","unique id")
tree = ttk.Treeview(r, columns=columns, show='headings',yscrollcommand = scroll bar.set)
tree.heading("name",text="Name")
tree.heading("phone number 1",text="Phone Number 1")
tree.heading("phone number 2",text="Phone Number 2")
tree.heading("phone number 3",text="Phone Number 3")
tree.heading("email",text="Email")
tree.heading("date of birth",text="Date of Birth")
tree.heading("group",text="Group")
tree.heading("address",text="Address")
tree.heading("profession",text="Profession")
tree.heading("unique id",text="Time Stamp")
tree.column('name', width=60, anchor=W)
tree.column('phone number 1', width=15,)
tree.column('phone number 2', width=15,)
tree.column('phone number 3', width=15,)
tree.column('email', width=60,)
```



```
tree.column('date of birth',width=8,)
  tree.column('group', width=20,)
  tree.column('address', width=50,)
  tree.column('profession', width=10,)
  tree.column('unique_id', width=10,)
  l.sort(key=lambda x:x[0])
  for i in 1:
    tree.insert(", END, values=i)
  defitem selected(event):
    for selected item in tree.selection():
       item = tree.item(selected item)
       record = item['values']
       print(record)
       open(record,r)
  tree.bind('<Double-1>', item selected)
  tree.pack(fill=BOTH,expand=True)
  #scrollbar = ttk.Scrollbar(r, orient=VERTICAL, command=tree.yview)
  #tree.configure(yscroll=scrollbar.set)
  #scrollbar.pack(side=LEFT,fill=Y)
  r.mainloop()
def dummyData():
```



```
#phonebook.append([name,phone,phone2,phone3,email,dob,group,address,profession,unique_id])
  #Dummy data is to add entries quickly so that testing can be done quickly
  phonebook.append(["Police","100","","","gov@gmail.com","","emergency","Ranchi
Jharkhand","police",str(datetime.datetime.now())])
  phonebook.append(["Hospital","112","","","hospital@gmail.com","","emergency","Ranchi
Jharkhand", "hospital", str(datetime.datetime.now())])
  phonebook.append(["Shreya
Mishra", "9193939999", "9343387733", "9876543210", "shreya@gmail.com", "22/02/2002", "friend", "Ra
nchi Jharkhand","student",str(datetime.datetime.now())])
  phonebook.append(["Apoorva
Raj","9193933499","9343387732","9126543210","apoorva@gmail.com","25/12/2002","important","
Mysore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["Adrija
Pes","9419393559","9343456733","9876733210","adrija@gmail.com","05/05/2004","favourite","Ban
galore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["Abhijeet
Mishra", "9193456999", "9999387733", "9873293210", "abhijeet@gmail.com", "09/11/1978", "work", "Hy
derabad Telangana", "teacher", str(datetime.datetime.now())])
  phonebook.append(["Isham
Sinha", "9567456999", "9934587733", "9878943210", "isham@gmail.com", "09/01/2007", "friend", "Bang
alore Karnataka","student",str(datetime.datetime.now())])
  phonebook.append(["B. S.
Grewal", "9193456999", "9999387733", "9873293210", "grewal@gmail.com", "07/08/2002", "classmate",
"Hyderabad Telangana", "teacher", str(datetime.datetime.now())])
  phonebook.append(["Skanda Sreesha
Prashad", "9193402399", "9991234733", "9870912210", "skanda@gmail.com", "04/02/2005", "friend", "B
angalore Karnataka", "student", str(datetime.datetime.now())])
```



```
phonebook.append(["Chandan Kumar
Jha","9155402399","9991111133","9222912210","chandan@gmail.com","04/12/1985","family","Ban
galore Karnataka","student",str(datetime.datetime.now())])
  phonebook.append(["Rashmi
Jha","9155433399","9333111133","9233312210","rashmi@gmail.com","02/07/1985","family","Banga
lore Karnataka", "student", str(datetime.datetime.now())])
  mb.showinfo("Data added", "Dummy Data Entries is added to the phone directory")
def searchContact():
  global phonebook
  r= object("Search Contact", "600x600",(600,600),"#7575a3")
  Title= Label(r,
  text="Search Contact",
relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  search_var=StringVar(r)
  def submit():
    global phonebook
    q=search_var.get()
    print(q,type(q))
    1=[]
    c=0
    for i in phonebook:
       #print(i)
```



```
if i[0].startswith(q) or i[0].endswith(q) or i[1] == q or i[2] == q or i[3] == q or i[4] == q or i[6] == q or
i[7].startswith(q) or i[7].endswith(q) or i[8] = q:
            l.append(i)
            c=1
       print("c=",c)
    if c==0:
       mb.showinfo("No Contact Found", "No results found")
    elif c==1:
       openList(1)
  search label=Label(r,text="Search:",
    font = ("Times New Roman", 15, "bold"),
    bg="#1f1f2e",
    fg="white",
    ).pack(side=TOP,anchor=N,fill=X,pady=4)
  search entry=Entry(r,textvariable=search var,font = ('Times New
Roman',10,'normal'),width=100).pack(side=TOP,anchor=N)
  g1 img=PhotoImage(master=r,file="D:\phone.py\icons8-search-96.png")
  i2 = g1 img.subsample(3,3)
  Button(r,
    text="Search",
    command=submit,
    bg="#3d3d5c",
    fg="white",
    font=("Times New Roman", 15, "bold"),
```



```
padx=10,
    pady=5,
    image=i2,
    compound=LEFT
    ).pack(side=TOP,anchor=N,padx=200,fill=X,pady=10)
  r.mainloop()
def allContacts():
  openList(phonebook)
def manageGroups():
  r=object("Groups","600x600",(600,600),"#7575a3")
  Title= Label(r,
  text="Groups",
  relief=GROOVE,bg="#3d3d5c",fg="white",font=("Calibri",30,"bold"),
  borderwidth=10
  ).pack(side=TOP,fill=X)
  def exist():
    t=["work","friends","friend","family","emergency","favourite","important"]
    1=[]
    for i in phonebook:
       if i[6].lower() not in t:
         l.append(i[6])
    return 1
```



```
def work():
    1=[]
    for i in phonebook:
       if i[6]=="Work" or i[6]=="WORK" or i[6]=="work":
         1.append(i)
    if 1!=[]:
       openList(1)
    else:
       mb.showinfo("Empty Group","No one present in the group")
  def friend():
    1=[]
    for i in phonebook:
       if i[6]=="Friends" or i[6]=="FRIENDS" or i[6]=="friends" or i[6]=="friend" or i[6]=="Friend"
or i[6] == "FRIEND":
         l.append(i)
    if l!=[]:
       openList(1)
    else:
       mb.showinfo("Empty Group","No one present in the group")
  def family():
    1=[]
    for i in phonebook:
       if i[6]=="Family" or i[6]=="FAMILY" or i[6]=="family":
         1.append(i)
    if l!=[]:
       openList(1)
```



```
else:
    mb.showinfo("Empty Group","No one present in the group")
def favourite():
  1=[]
  for i in phonebook:
    if i[6]=="favourite" or i[6]=="Favourite" or i[6]=="favourite".upper():
       1.append(i)
  if l!=[]:
    openList(1)
  else:
    mb.showinfo("Empty Group", "No one present in the group")
def important():
  1=[]
  for i in phonebook:
    if i[6]=="important" or i[6]=="important" or i[6]=="important".upper():
       1.append(i)
  if l!=[]:
    openList(1)
  else:
    mb.showinfo("Empty Group","No one present in the group")
def emergency():
  1=[]
  for i in phonebook:
    if i[6]=="emergency" or i[6]=="Emergency" or i[6]=="EMERGENCY":
       1.append(i)
  if 1!=[]:
```



```
openList(1)
  else:
    mb.showinfo("Empty Group","No one present in the group")
def others():
  1=[]
  a=exist()
  for i in phonebook:
    if i[6] in a:
       l.append(i)
  if l!=[]:
    openList(1)
  else:
    mb.showinfo("Empty Group","Noone present in the group")
g\_img=PhotoImage(master=r,file="D:\phone.py\icons8-emergency-64.png")
i = g \text{ img.subsample}(2,2)
g1 img=PhotoImage(master=r,file="D:\phone.py\icons8-work-64.png")
i1 = g1 img.subsample(2,2)
g2 img=PhotoImage(master=r,file="D:\phone.py\icons8-friends-96.png")
i2 = g2 img.subsample(2,2)
g3 img=PhotoImage(master=r,file="D:\phone.py\icons8-family-120.png")
i3 = g3 img.subsample(3,3)
g4 img=PhotoImage(master=r,file="D:\phone.py\icons8-group-96 (1).png")
```



```
i4 = g4 img.subsample(2,2)
g5_img=PhotoImage(master=r,file="D:\phone.py\icons8-favourite-64.png")
i5 = g5 img.subsample(2,2)
g6_img=PhotoImage(master=r,file="D:\phone.py\icons8-important-64.png")
i6 = g6 img.subsample(2,2)
Button(
  r,
  text=" Emergency Contacts",
  command=emergency,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Important Contacts",
  command=important,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
```



```
compound=LEFT,
  image=i6
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Favourite Contacts",
  command=favourite,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i5
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Work",
  command=work,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i1
  ).pack(fill=X,pady=5)
```



```
Button(
  r,
  text=" Friends",
  command=friend,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i2
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Family",
  command=family,
  bg="#3d3d5c",
  fg="white",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i3
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Others",
  command=others,
  bg="#3d3d5c",
  fg="white",
  font =("Times New Roman", 15),
  compound=LEFT,
  image=i4
```





```
).pack(fill=X,pady=5)
  r.mainloop()
def deleteallContact():
  global phonebook
  phonebook=[]
  print(phonebook)
  mb.showinfo("All contacts Deleted","All Contacts Deleted")
def exit_prg():
  sys.exit(0)
def setPhonebook(pb):
  global phonebook
  phonebook =pb
def light_mode():
  import function2
  function2.setPhonebook(phonebook)
  import main2
```



FILE 4:

```
from tkinter import *
from tkinter import messagebox as mb
from tkinter import ttk
from types import NoneType
import datetime
import sys
#from tkinter.ttk import *
phonebook=[]
def object(t,g,min,bg):
  r=Tk()
  a,b=min
  r.title(t)
  r.geometry(g)
  r.iconbitmap("calltelephoneauricularincircularbutton 80086.ico")
  r.minsize(a,b)
  r.c onfigure(bg=bg)
  return r
def createContact():
  r= object("Create Contact", "1100x600",(1100,600),"#CED9F7")
  Title= Label(r,
  text="Create Contact", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
```



```
).pack(side=TOP,fill=X)
name_var=StringVar(master=r)
phone var=StringVar(master=r)
phone2_var=StringVar(master=r)
phone3_var=StringVar(r)
email_var=StringVar(r)
dob_var=StringVar(r)
group_var=StringVar(r)
profession_var=StringVar(r)
address_var=StringVar(r)
def submit():
  c=0
  unique_id = str(datetime.datetime.now())
  name=name_var.get()
  phone=phone_var.get()
  if phone2 var!=NoneType:
    phone2=phone2 var.get()
    phone2 var.set("")
  else:
    phone2=""
  if phone3_var!=NoneType:
    phone3_phone3_var.get()
    phone3 var.set("")
  else:
```



```
phone3=""
email=email var.get()
dob=dob_var.get()
group=group_var.get()
address_var.get()
profession= profession_var.get()
#validating
if phone!="":
  if not(phone.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
    c=1
if email!="":
  if not('@' in email):
     mb.showerror("Invalid Email", "Invalid Email")
    r.destroy()
    c=1
if phone2 !="":
  if not(phone2.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
     c=1
if phone3!="":
  if not(phone3.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
     r.destroy()
```



```
c=1
     if dob!="":
       if len(dob)!=10 and not("/" in dob):
          mb.showerror("Invalid Date of Birth Format", "Invalid Date of Birth Format")
         r.destroy()
         c=1
     if profession!="":
       if not profession.isalpha():
          mb.showerror("Profession Can't contain digits or special characters", "Profession Can't
contain digits or special characters")
          r.destroy()
          c=1
     if c==0:
phonebook.append([name,phone2,phone3,email,dob,group,address,profession,unique_id])
       mb.showinfo("Contact Created", "The Contact is Successfully Created")
       r.destroy()
     name var.set("")
     phone_var.set("")
     email_var.set("")
     dob var.set("")
     group_var.set("")
     address var.set("")
     profession var.set("")
     print(phonebook)
```



```
def add2ndnum():
    nonlocal phone2_var

phone2_label=Label(r,
    text="Number 2:",
    font =("Times New Roman",15),
    bg="#c3e8e2",
    fg="BLACK",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
    phone2_entry=Entry(r,width=60,textvariable=phone2_var,).pack(side=TOP,anchor=N,padx=100)

add=Button(r,
    text="ADD THIRD NUMBER",
    command=add3rdnum,
    font=("Times New Roman",15,"bold"),
    bg="#9ccefa",
    fg="black",).pack(side=TOP,anchor=N,fill=X,padx=200)
```



```
def add3rdnum():
  nonlocal phone3_var
  phone3_label=Label(r,
  text="Number 3:",
  font = ("Times New Roman", 15),
  bg="#c3e8e2",
  fg="black",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone3_entry=Entry(r,width=60,textvariable=phone3_var,).pack(side=TOP,anchor=N,padx=100)
phone2_var.set("")
phone3 var.set("")
sub=Button(r,
  text="Submit",
  command=submit,
  bg="#9ccefa",
  font=("Times New Roman", 15, "bold"),
  pady=8,
  fg="black",
  relief=GROOVE,
```



```
sub.pack(side=TOP,anchor=N, fill=X,padx=200,pady=9)
  name_label=Label(r,
  text="Name:",
  font = ("Times New Roman", 15),
  bg="#c3e8e2",
  fg="black",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  name entry=Entry(r,width=100,textvariable=name var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  phone label=Label(r,
  text="Number 1:",
  font = ("Times New Roman", 15),
  bg="#c3e8e2",
  fg="black",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone entry=Entry(r,width=60,textvariable=phone var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  add=Button(r,
    text="ADD SECOND NUMBER",
    command=add2ndnum,
    font=("Times New Roman", 15, "bold"),
    bg="#9ccefa",
    fg="black",).pack(side=TOP,anchor=N,fill=X,padx=200)
  email label=Label(r,text="Email:",
    font = ("Times New Roman", 15),
```



```
bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  email entry=Entry(r,width=100,textvariable=email var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  dob label=Label(r,text="Date of birth(DD/MM/YYYY):",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  dob entry=Entry(r,width=50,textvariable=dob var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
category label=Label(r,text="Category(Family/Friends/Work/Favorite/Emergency/Important/Others):"
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  category entry=Entry(r,width=60,textvariable=group var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  address label=Label(r,text="Address:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
```



```
fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  address entry=Entry(r,width=60,textvariable=address var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  profession label=Label(r,text="Designation:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  profession entry=Entry(r,width=60,textvariable=profession var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  r.mainloop()
def editContact(i,t,t1):
  r= object("Edit Contact", "1100x600",(1100,600),"#CED9F7")
  Title= Label(r,
  text="Edit Contact", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  i[1]=str(i[1])
  i[2]=str(i[2])
  i[3]=str(i[3])
  name var=StringVar(master=r)
  phone var=StringVar(master=r)
  phone2 var=StringVar(master=r)
  phone3 var=StringVar(r)
```



```
email_var=StringVar(r)
dob var=StringVar(r)
group_var=StringVar(r)
profession_var=StringVar(r)
address_var=StringVar(r)
def submit():
  c=0
  unique_id = i[9]
  name=name_var.get()
  phone=phone_var.get()
  if phone2_var!=NoneType:
    phone2=phone2_var.get()
    phone2_var.set("")
  else:
    phone2=""
  if phone3_var!=NoneType:
    phone3_phone3_var.get()
    phone3_var.set("")
  else:
    phone3=""
  email=email_var.get()
  dob=dob_var.get()
  group=group_var.get()
  address =address var.get()
  profession= profession var.get()
  d=phonebook.index(i)
```



```
#validating
if phone!="":
  if not(phone.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
    c=1
if email!="":
  if not('@' in email):
     mb.showerror("Invalid Email", "Invalid Email")
     r.destroy()
     c=1
if phone2 !="":
  if not(phone2.isdigit()):
     mb.showerror("Number can contain only digits", "Number can contain only digits")
    r.destroy()
     c=1
if phone3 !="":
  if not(phone3.isdigit()):
     mb.showerror("Number can contain only digits","Number can contain only digits")
     r.destroy()
    c=1
if dob!="":
  if len(dob)!=10 and not("/" in dob):
     mb.showerror("Invalid Date of Birth Format", "Invalid Date of Birth Format")
    r.destroy()
     c=1
```



```
if profession!="":
       if not profession.isalpha():
         mb.showerror("Profession Can't contain digits or special characters", "Profession Can't
contain digits or special characters")
         r.destroy()
         c=1
    if c==0:
       phonebook[d]=[name,phone,phone2,phone3,email,dob,group,address,profession,unique_id]
       print(phonebook)
       mb.showinfo("Contact Updated", "The Contact is Successfully Updated")
       r.destroy()
    t.destroy()
    t1.destroy()
  sub=Button(r,
    text="Update Contact",
    command=submit,
    bg="#9ccefa",
    font=("Times New Roman",15,"bold"),
    pady=8,
    fg="black",
    relief=GROOVE,).pack(side=TOP,anchor=N,padx=200,pady=9)
  name var.set(i[0])
  phone_var.set(i[1])
```



```
phone2 var.set(i[2])
  phone3 var.set(i[3])
  email_var.set(i[4])
  dob_var.set(i[5])
  group_var.set(i[6])
  address_var.set(i[7])
  profession var.set(i[8])
  name_label=Label(r,
  text="Name:",
  font = ("Times New Roman", 15),
  bg="#c3e8e2",
  fg="black",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  name entry=Entry(r,width=100,textvariable=name var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  phone label=Label(r,
  text="Number 1:",
  font = ("Times New Roman", 15),
  bg="#c3e8e2",
  fg="black",
  ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone_entry=Entry(r,width=60,textvariable=phone_var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  phone2_label=Label(r,
    text="Number 2:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
```



```
).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone2 entry=Entry(r,width=60,textvariable=phone2 var,).pack(side=TOP,anchor=N,padx=100)
  phone3 label=Label(r,
    text="Number 3:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  phone3_entry=Entry(r,width=60,textvariable=phone3_var,).pack(side=TOP,anchor=N,padx=100)
  email label=Label(r,text="Email:",
    font =("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  email entry=Entry(r,width=100,textvariable=email var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  dob label=Label(r,text="Date of birth(DD/MM/YYYY):",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  dob_entry=Entry(r,width=60,textvariable=dob var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
category label=Label(r,text="Category(Family/Friends/Work/Favorite/Emergency/Important/Others):"
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
```



```
).pack(side=TOP,anchor=N,fill=X,padx=100)
  category entry=Entry(r,width=60,textvariable=group var,font = ('Times New
Roman',10,'normal')).pack(side=TOP,anchor=N,padx=100)
  address label=Label(r,text="Address:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  address entry=Entry(r,width=100,textvariable=address var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  profession label=Label(r,text="Designation:",
    font = ("Times New Roman", 15),
    bg="#c3e8e2",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,padx=100)
  profession entry=Entry(r,width=60,textvariable=profession var,font = ('Times New
Roman', 10, 'normal')).pack(side=TOP, anchor=N, padx=100)
  r.mainloop()
def delete(r1,r,i):
    #i=phonebook.index(i)
    r2=object( "{} Contact Deleted".format(i[0]), "300x100",(300,100), "#CED9F7")
    r2.maxsize(300,100)
    i[1]=str(i[1])
    i[2]=str(i[2])
    i[3] = str(i[3])
```



```
phonebook.remove(i)
    Label(r2,text="Contact Deleted",padx=10,pady=10,bg="#c3e8e2",
    font=("Times New Roman",15),
    fg="black",relief=GROOVE).pack(side=TOP,anchor=CENTER,fill=X)
    r1.destroy()
    r.destroy()
    Button(
      r2,
       text="OK",
       font=("Times New Roman",15,"bold"),
       bg="#9ccefa",
       fg="black",
       command=r2.destroy
       ).pack(side=BOTTOM,anchor=S,fill=X,padx=10,pady=10)
    r2.mainloop()
def open(i,r):
  r1=object( "{} Contact Info".format(i[0]), "500x500",(500,500), "#CED9F7")
  Title=Label(r1,
  text="Contact Details", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
    ).pack(side=TOP,fill=X)
```



```
Label(r1,
  text="Name: "+ i[0],
  font = ("Times New Roman", 15),
  bg="#b8cde0",
  fg="black",
  relief=SUNKEN,
  borderwidth=2,
  padx=10,
    pady=3).pack(fill=X,side=TOP)
Label(r1,
    text="Number: " +str(i[1]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
if str(i[2])!="":
  Label(r1,
      text="Number 2: " +str(i[2]),
       font = ("Times New Roman", 15),
       bg="#b8cde0",
       fg="black",
       relief=SUNKEN,
```



```
borderwidth=2,
       padx=10,
       pady=3,
       ).pack(fill=X,side=TOP)
if str(i[3])!="":
  Label(r1,
      text="Number 3: " +str(i[3]),
       font = ("Times New Roman", 15),
      bg="#b8cde0",
      fg="black",
       relief=SUNKEN,
       borderwidth=2,
       padx=10,
       pady=3,
       ).pack(fill=X,side=TOP)
Label(r1,
    text="Email: "+str(i[4]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
```

Label(r1,



```
text="Date of Birth: " +str(i[5]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Group: " +i[6],
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Address: " +str(i[7]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
```



```
padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Designation: " +str(i[8]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
Label(r1,
    text="Timestamp: " +str(i[9]),
    font = ("Times New Roman", 15),
    bg="#b8cde0",
    fg="black",
    relief=SUNKEN,
    borderwidth=2,
    padx=10,
    pady=3,
    ).pack(fill=X,side=TOP)
,,,,,,
edit_img=PhotoImage(r1,file="D:\phone.py\icons8-edit-40.png")
```



```
p6 = edit img.subsample(1,1)
delete1_img=PhotoImage(r1,file="D:\phone.py\icons8-delete-300.png")
p7 = delete1 img.subsample(6,6)
g img=PhotoImage(master=r1,file="D:\phone.py\icons8-delete-300.png")
i1 = g \text{ img.subsample}(6,6)
g1_img=PhotoImage(master=r1,file="D:\phone.py\icons8-edit-80.png")
i2 = g1 img.subsample(2,2)
Button(r1,
    text=" Edit Contact",
    command=lambda:[editContact(i,r,r1)],
    font=("Times New Roman",15),
    fg="black",
    bg="#9ccefa",
    pady=5,
    image=i2,
    compound=LEFT,
    ).pack(side=BOTTOM,fill=X)
Button(r1,text= " Delete Contact",
    #way to send parameters
    #command=lambda:delete(r1),
    command=lambda:[delete(r1,r,i)],
    font=("Times New Roman",15),
    fg="black",
```



```
bg="#9ccefa",
      pady=5,
      #image=p7,
      #compound=LEFT,
      image=i1,
      compound=LEFT,
      ).pack(side=BOTTOM,fill=X)
  r1.mainloop()
def openList(l):
  r=object("Contacts","1100x600",(1100,600),"#CED9F7")
  Title= Label(r,
  text="Contacts", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  create_img=PhotoImage(master=r,file="D:\phone.py\icons8-add-96.png")
  p = create img.subsample(2,2)
  create contact=Button(r,
  text=" Create Contact",
  image=p,
  font=("Times New Roman",14,"bold"),
  command=createContact,
  compound=LEFT,
  bg="#9ccefa",
```



```
fg="black"
  ).pack(padx=200,fill=X,pady=2)
  search_var=StringVar(r)
  def submit():
     global phonebook
     q=search_var.get()
    print(q,type(q))
    1=[]
     c=0
    for i in phonebook:
       print(i)
       if i[0].startswith(q) or i[0].endswith(q) or i[1] == q or i[2] == q or i[3] == q or i[4] == q or i[6] == q or
i[7].startswith(q) or i[7].endswith(q) or i[8] == q:
            l.append(i)
            c=1
       print("c=",c)
     if c==0:
       mb.showinfo("No Contact Found", "No results found")
     elif c==1:
       r.destroy()
       openList(1)
  search label=Label(r,text="Search:",
```



```
font = ("Times New Roman", 15, "bold"),
    bg="#CBF7F3",
    fg="black",
    ).pack(side=TOP,anchor=N,fill=X,pady=4)
  search entry=Entry(r,textvariable=search var,font = ('Times New
Roman', 10, 'normal'), width=100).pack(side=TOP, anchor=N)
  g1 img=PhotoImage(master=r,file="D:\phone.py\icons8-search-96.png")
  i2 = g1_{img.subsample(3,3)}
  Button(r,
    text=" Search",
    command=submit,
    bg="#9ccefa",
    fg="black",
    font=("Times New Roman",15,"bold"),
    padx=10,
    pady=5,
    image=i2,
    compound=LEFT
    ).pack(side=TOP,anchor=N,padx=200,fill=X,pady=2)
  #phonebook.append([name,phone2,phone3,email,dob,group,address,profession,unique id])
  scroll bar = Scrollbar(r)
  scroll bar.pack( side = RIGHT,
```



```
fill = Y)
```

```
columns = ('name', 'phone number 1', "phone number 2", "phone number 3",
'email', "date of birth", "group", "address", "profession", "unique id")
  tree = ttk.Treeview(r, columns=columns, show='headings',yscrollcommand = scroll bar.set)
  tree.heading("name",text="Name")
  tree.heading("phone number 1",text="Phone Number 1")
  tree.heading("phone number 2",text="Phone Number 2")
  tree.heading("phone number 3",text="Phone Number 3")
  tree.heading("email",text="Email")
  tree.heading("date of birth",text="Date of Birth")
  tree.heading("group",text="Group")
  tree.heading("address",text="Address")
  tree.heading("profession",text="Profession")
  tree.heading("unique id",text="Time Stamp")
  tree.column('name', width=60, anchor=W)
  tree.column('phone number 1', width=15,)
  tree.column('phone number 2', width=15,)
  tree.column('phone number 3', width=15,)
  tree.column('email', width=60,)
  tree.column('date_of_birth',width=8,)
  tree.column('group', width=20,)
  tree.column('address', width=50,)
  tree.column('profession', width=10,)
  tree.column('unique id', width=10,)
  l.sort(key=lambda x:x[0])
```



```
for i in 1:
    tree.insert(", END, values=i)
  def item_selected(event):
    for selected item in tree.selection():
       item = tree.item(selected item)
       record = item['values']
       print(record)
       open(record,r)
  tree.bind('<Double-1>', item selected)
  tree.pack(fill=BOTH,expand=True)
  #scrollbar = ttk.Scrollbar(r, orient=VERTICAL, command=tree.yview)
  #tree.configure(yscroll=scrollbar.set)
  #scrollbar.pack(side=LEFT,fill=Y)
  r.mainloop()
def dummyData():
  #phonebook.append([name,phone2,phone3,email,dob,group,address,profession,unique id])
  #Dummy data is to add entries quickly so that testing can be done quickly
  phonebook.append(["Police","100","","","gov@gmail.com","","emergency","Ranchi
Jharkhand","police",str(datetime.datetime.now())])
  phonebook.append(["Hospital","112","","","hospital@gmail.com","","emergency","Ranchi
Jharkhand","hospital",str(datetime.datetime.now())])
```



```
phonebook.append(["Shreya
Mishra", "9193939999", "9343387733", "9876543210", "shreya@gmail.com", "22/02/2002", "friend", "Ra
nchi Jharkhand","student",str(datetime.datetime.now())])
  phonebook.append(["Apoorva
Raj","9193933499","9343387732","9126543210","apoorva@gmail.com","25/12/2002","important","
Mysore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["Adrija
Pes","9419393559","9343456733","9876733210","adrija@gmail.com","05/05/2004","favourite","Ban
galore Karnataka","student",str(datetime.datetime.now())])
  phonebook.append(["Abhijeet
Mishra", "9193456999", "9999387733", "9873293210", "abhijeet@gmail.com", "09/11/1978", "work", "Hy
derabad Telangana", "teacher", str(datetime.datetime.now())])
  phonebook.append(["Isham
Sinha", "9567456999", "9934587733", "9878943210", "isham@gmail.com", "09/01/2007", "friend", "Bang
alore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["B. S.
Grewal", "9193456999", "9999387733", "9873293210", "grewal@gmail.com", "07/08/2002", "classmate",
"Hyderabad Telangana", "teacher", str(datetime.datetime.now())])
  phonebook.append(["Skanda
Prasad", "9193402399", "9991234733", "9870912210", "skanda@gmail.com", "04/02/2005", "friend", "Ba
ngalore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["Chandan Kumar
Jha","9155402399","9991111133","9222912210","chandan@gmail.com","04/12/1985","family","Ban
galore Karnataka", "student", str(datetime.datetime.now())])
  phonebook.append(["Rashmi
Jha", "9155433399", "9333111133", "9233312210", "rashmi@gmail.com", "02/07/1985", "family", "Banga
lore Karnataka", "student", str(datetime.datetime.now())])
  mb.showinfo("Data added", "Sample Data Entries added to the phone directory.")
```



```
def searchContact():
  global phonebook
  r= object("Search Contact", "600x600",(600,600),"#CED9F7")
  Title= Label(r,
  text="Search Contact", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  search_var=StringVar(r)
  def submit():
    global phonebook
    q=search_var.get()
    print(q,type(q))
    1=[]
    c=0
    for i in phonebook:
       print(i)
       if i[0].startswith(q) or i[0].endswith(q) or i[1] == q or i[2] == q or i[3] == q or i[4] == q or i[6] == q or
       i[7].startswith(q) or i[7].endswith(q) or i[8]==q:
            l.append(i)
            c=1
       print("c=",c)
    if c==0:
       mb.showinfo("No Contact Found", "No results found")
    elif c==1:
```



r.mainloop()

```
openList(l)

search_label=Label(r,text="Search:",

font =("Times New Roman",15,"bold"),

bg="#b8cde0",

fg="black",
).pack(side=TOP,anchor=N,fill=X,pady=4)

search_entry=Entry(r,textvariable=search_var,font = ('Times New Roman',10,'normal'),width=100).pack(side=TOP,anchor=N)

gl_img=PhotoImage(master=r,file="D:\phone.py\icons8-search-96.png")

i2 = gl_img.subsample(3,3)
```

```
Button(r,
text="Search",
command=submit,
bg="#9ccefa",
fg="black",
font=("Times New Roman",15,"bold"),
padx=10,
pady=5,
image=i2,
compound=LEFT
).pack(side=TOP,anchor=N,padx=200,fill=X,pady=10)
```



```
def allContacts():
  openList(phonebook)
  #phonebook.append([name,phone2,phone2,phone3,email,dob,group,address,profession,id])
def manageGroups():
  r=object("Groups","600x600",(600,600),"#CED9F7")
  Title= Label(r,
  text="Groups", relief=GROOVE,bg="#CBF7F3",fg="black",font=("Times New
Roman",30,"bold"),borderwidth=10
  ).pack(side=TOP,fill=X)
  def exist():
    t=["work","friends","friend","family","emergency","favourite","important"]
    1=[]
    for i in phonebook:
       if i[6].lower() not in t:
         l.append(i[6])
    return 1
  def work():
    1=[]
    for i in phonebook:
       if i[6]=="Work" or i[6]=="WORK" or i[6]=="work":
         l.append(i)
    if l!=[]:
       openList(1)
    else:
       mb.showinfo("Empty Group","No one present in the group")
```



```
def friend():
    1=[]
    for i in phonebook:
       if i[6]=="Friends" or i[6]=="FRIENDS" or i[6]=="friends" or i[6]=="friend" or i[6]=="Friend"
or i[6] == "FRIEND":
         l.append(i)
    if 1!=[]:
       openList(1)
    else:
       mb.showinfo("Empty Group","No one present in the group")
  def family():
    1=[]
    for i in phonebook:
       if i[6]=="Family" or i[6]=="FAMILY" or i[6]=="family":
         l.append(i)
    if l!=[]:
       openList(1)
    else:
       mb.showinfo("Empty Group","No one present in the group")
  def favourite():
    1=[]
    for i in phonebook:
       if i[6]=="favourite" or i[6]=="Favourite" or i[6]=="favourite".upper():
         1.append(i)
    if l!=[]:
       openList(1)
```



```
else:
    mb.showinfo("Empty Group","No one present in the group")
def important():
  1=[]
  for i in phonebook:
    if i[6]=="important" or i[6]=="Important" or i[6]=="important".upper():
       1.append(i)
  if l!=[]:
     openList(1)
  else:
    mb.showinfo("Empty Group","No one present in the group")
def emergency():
  1=[]
  for i in phonebook:
    if i[6]=="emergency" or i[6]=="Emergency" or i[6]=="EMERGENCY":
       1.append(i)
  if l!=[]:
     openList(1)
  else:
    mb.showinfo("Empty Group","No one present in the group")
def others():
  1=[]
  a=exist()
  for i in phonebook:
    if i[6] in a:
       1.append(i)
```



```
if 1!=[]:
    openList(1)
  else:
    mb.showinfo("Empty Group","No one present in the group")
g img=PhotoImage(master=r,file="D:\phone.py\icons8-emergency-64.png")
i = g \text{ img.subsample}(2,2)
g1 img=PhotoImage(master=r,file="D:\phone.py\icons8-work-64.png")
i1 = g1 img.subsample(2,2)
g2 img=PhotoImage(master=r,file="D:\phone.py\icons8-friends-96.png")
i2 = g2 img.subsample(2,2)
g3 img=PhotoImage(master=r,file="D:\phone.py\icons8-family-120.png")
i3 = g3 img.subsample(3,3)
g4 img=PhotoImage(master=r,file="D:\phone.py\icons8-group-96 (1).png")
i4 = g4 img.subsample(2,2)
g5_img=PhotoImage(master=r,file="D:\phone.py\icons8-favourite-64.png")
i5 = g5_{img.subsample(2,2)}
g6 img=PhotoImage(master=r,file="D:\phone.py\icons8-important-64.png")
i6 = g6 img.subsample(2,2)
```



```
Button(
  r,
  text=" Emergency Contacts",
  command=emergency,
  bg="#9ccefa",
  fg="black",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Important Contacts",
  command=important,
  bg="#9ccefa",
  fg="black",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i6
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Favourite Contacts",
  command=favourite,
  bg="#9ccefa",
```



```
fg="black",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i5
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Work",
  command=work,
  bg="#9ccefa",
  fg="black",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i1
  ).pack(fill=X,pady=5)
Button(
  r,
  text=" Friends",
  command=friend,
  bg="#9ccefa",
  fg="black",
  font = ("Times New Roman", 15),
  compound=LEFT,
  image=i2
  ).pack(fill=X,pady=5)
```



```
Button(
    r,
    text=" Family",
    command=family,
    bg="#9ccefa",
    fg="black",
    font = ("Times New Roman", 15),
    compound=LEFT,
    image=i3
    ).pack(fill=X,pady=5)
  Button(
    r,
    text=" Others",
    command=others,
    bg="#9ccefa",
    fg="black",
    font = ("Times New Roman", 15),
    compound=LEFT,
    image=i4
    ).pack(fill=X,pady=5)
  r.mainloop()
def deleteallContact():
  global phonebook
  phonebook=[]
  print(phonebook)
  mb.showinfo("All contacts Deleted","All Contacts Deleted")
```



PHONEBOOK

```
def exit_prg():
    sys.exit(0)

def setPhonebook(pb):
    global phonebook
    phonebook = pb

def dark_mode():
    import function
    function.setPhonebook(phonebook)
    import main
```



TESTING

We have tested and made sure that there are no logical and syntax errors during the execution of the project. We have added two backgrounds, a Light Mode and a Dark Mode for aesthetic purposes. The user can switch between them anytime. We have tested every function present in the application to make sure that they are all error free. To prevent a person from entering alphabets as the input for phone numbers, we have ensured that the new person's list will get appended only if the phone numbers contain numbers, and not alphabets and special characters.


Every time the user adds a person's details, the person's details are added to the directory and is then displayed when All Contacts is opened. The user can modify a person's details by clicking on their name in the All-Contacts tab. A person's contact can also be deleted in the same place. The application also allows the user to delete all the contacts present in one go. If the user clicks on Delete All Contacts, every single contact and their details present in the application will be erased.

We have also enabled the user to sort the contacts into different pre-existing groups based on their need. The application provides multiple groups, namely, Family, Friends, Work, Emergency Contacts, etc. We have also added the feature to select a contact as an Important Contact or a Favourite Contact.

One of the main features of the application is its ability to search for a contact. It allows them to search for specific contacts based on any criteria, be it their name, phone number, email address, address, category, etc. All the contacts are stored in alphabetical order so that they can be easily accessed. Each contact also stores the timestamp at which they have been added. This serves as a unique ID for each person.



RESULT

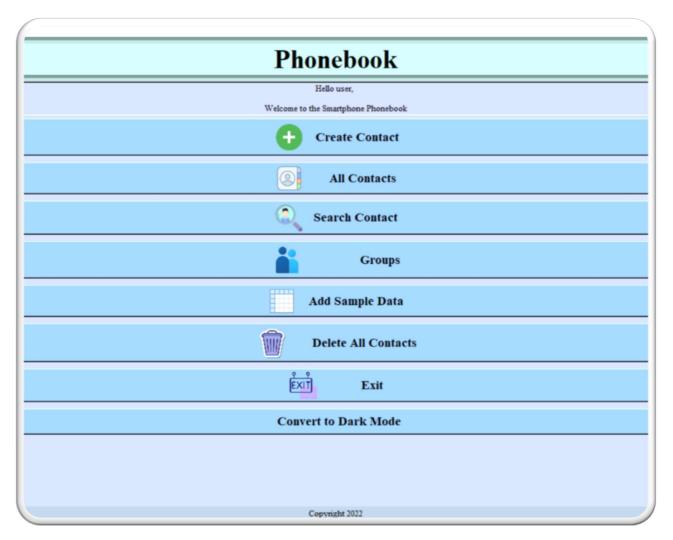

The Menu Page in Light Mode





The Menu Page in Dark Mode



ூ Create Contact		7-2	0	×
	Create Contact			
	Submit			
	Name:			
	Number 1:			
	ADD SECOND NUMBER			
	Email:			
	Date of birth(DD/MM/YYYY):			
	Category(Family/Friends/Work/Favorite/Emergency/Important/Others):			
	Address:			
	Designation:			

Create Contact Page





Contacts List





Individual Contact Details





Edit Contact Page





Search Contact Page





Groups Page



ANALYSIS

The project has been tested to our abilities and we have not found any logical or syntax errors. Based on the reviews, the project has been updated to contain the unique ID generated using the timestamp, the ability to add multiple phone numbers, etc. Extra features such as the Groups, Dark to Light Mode conversion, and many other features have been added to the project. The project also has a Sample Data that has been included for ease of usage during demonstration and testing.



CONCLUSION

We thus conclude out project titled, 'Phonebook", made using Python and using environments such as PyCharm and Visual Studio Code. Phonebook is a user-friendly project that contains Graphical User Interface, which is convenient to a user who does not have any knowledge of coding. GUI has been implemented using Tkinter and many other modules have been utilized for various purposes such as the timestamp, etc. We have also given the user the choice to choose the mode in which they want the program to be displayed, i.e., Light Mode or Dark Mode.



FUTURE ENHANCEMENTS

No project is perfect as we are after all humans and humans are bound to make errors. We believe that our project could be enhanced in the following ways:

- 1. The Graphical User Interface could be modified and the colour scheme used could have been enhanced.
- 2. The ability to add a person to more than one group, especially to the Favourites and Emergency Contacts groups could be added.
- 3. The project could be linked to a database containing the contact information so that the user does not have to input all the data every time they use the application.



REFERENCES

- GeeksForGeeks, Python GUI tkinter, 2020. [Online].
 Available: https://www.geeksforgeeks.org/python-gui-tkinter/ [Accessed: Dec. 12, 2021].
- 2. Python Tutorial, Tkinter Treeview. [Online].

 Available: pythontutorial.net/tkinter/tkinter-treeview/ [Accessed: Dec.14, 2021].
- 3. Tutorialspoint, Python Tkinter Scrollbar.[Online].

 Available: tutorialspoint.com/python/tk scrollbar.htm [Accessed: Jan 3, 2022].
- 4. Python, tkinter Python interface to Tcl/Tk. [Online].

 Available: https://docs.python.org/3/library/tkinter.html [Accessed: Dec 28, 2021].
- 5. Python, tkinter tkinter.ttk Tk themed widgets. [Online].

 Available: https://docs.python.org/3/library/tkinter.ttk.html [Accessed: Dec 28, 2021]