

Java Socket Programming

Computer Network Systems

slides are modified from **Dave Hollinger** and **Joonbok Lee**

Java Sockets Programming

- ❑ The package `java.net` provides support for sockets programming (and more).
- ❑ Typically you import everything defined in this package with:

```
import java.net.*;
```

Classes

InetAddress

Socket

ServerSocket

DatagramSocket

DatagramPacket

InetAddress class

□ static methods you can use to create new InetAddress objects.

- ❖ `getByName(String host)`
- ❖ `getAllByName(String host)`
- ❖ `getLocalHost()`

```
InetAddress x = InetAddress.getByName (  
                                "cse.unr.edu") ;
```

❖ **Throws UnknownHostException**

Sample Code: Lookup.java

- ❑ Uses InetAddress class to lookup hostnames found on command line.

```
> java Lookup cse.unr.edu www.yahoo.com  
cse.unr.edu:134.197.40.9  
www.yahoo.com:209.131.36.158
```

```
try {  
  
    InetAddress a = InetAddress.getByName(hostname);  
  
    System.out.println(hostname + ":" +  
                        a.getHostAddress());  
  
} catch (UnknownHostException e) {  
  
    System.out.println("No address found for " +  
                      hostname);  
  
}
```

Socket class

- ❑ Corresponds to active TCP sockets only!
 - ❖ client sockets
 - ❖ socket returned by `accept()`;
- ❑ Passive sockets are supported by a different class:
 - ❖ `ServerSocket`
- ❑ UDP sockets are supported by
 - ❖ `DatagramSocket`

JAVA TCP Sockets


❑ java.net.Socket

- ❖ Implements client sockets (also called just “sockets”).
- ❖ An endpoint for communication between two machines.
- ❖ Constructor and Methods
 - Socket(String host, int port): Creates a stream socket and connects it to the specified port number on the named host.
 - InputStream getInputStream()
 - OutputStream getOutputStream()
 - close()

❑ java.net.ServerSocket

- ❖ Implements server sockets.
- ❖ Waits for requests to come in over the network.
- ❖ Performs some operation based on the request.
- ❖ Constructor and Methods
 - ServerSocket(int port)
 - Socket Accept(): Listens for a connection to be made to this socket and accepts it. This method blocks until a connection is made.

Sockets

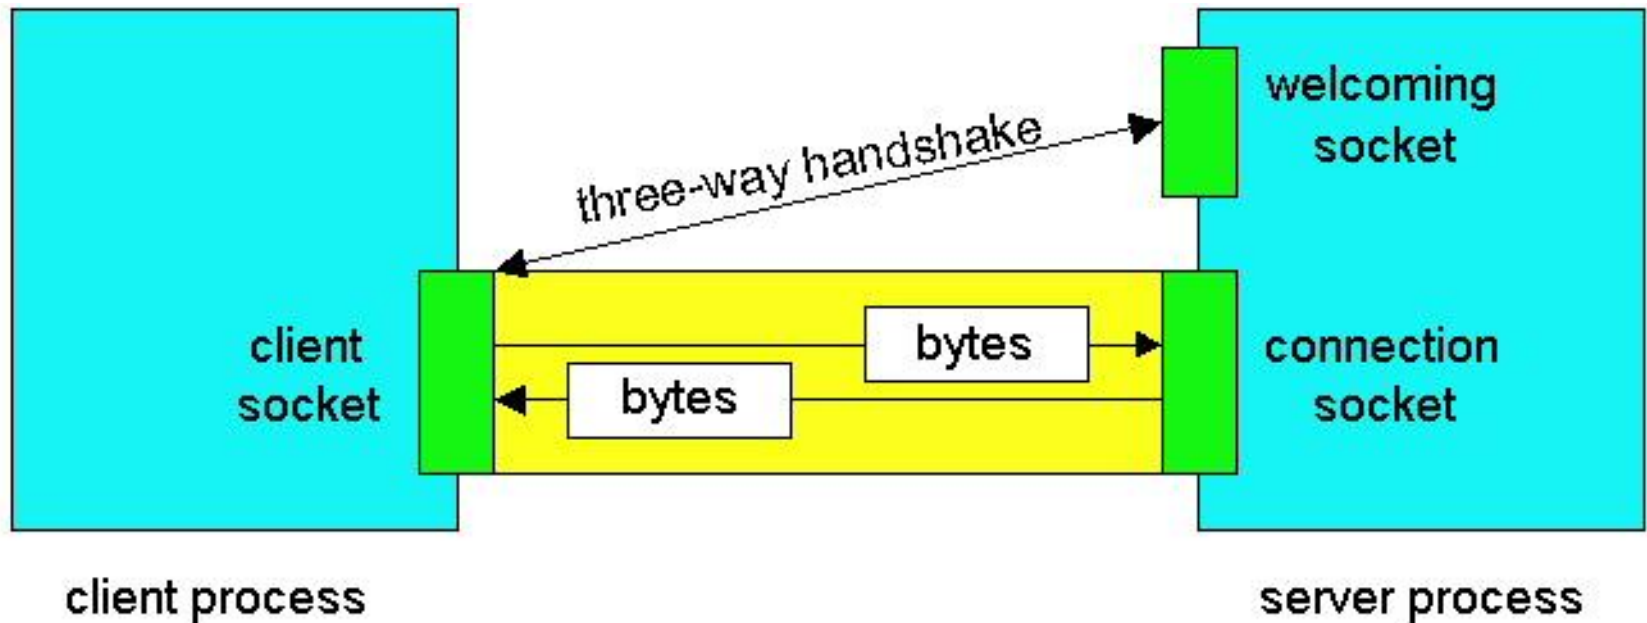

Client socket, welcoming socket (passive) and connection socket (active)

Socket Constructors

- ❑ Constructor creates a TCP connection to a named TCP server.

- ❖ There are a number of constructors:

```
Socket(InetAddress server, int port);
```

```
Socket(InetAddress server, int port,  
        InetAddress local, int localport);
```

```
Socket(String hostname, int port);
```

Socket Methods

```
void close();
```

```
InetAddress getAddress();
```

```
InetAddress getLocalAddress();
```

```
InputStream getInputStream();
```

```
OutputStream getOutputStream();
```

- ❑ Lots more (setting/getting socket options, partial close, etc.)

Socket I/O

- ❑ Socket I/O is based on the Java I/O support
 - ❖ in the package `java.io`
- ❑ `InputStream` and `OutputStream` are abstract classes
 - ❖ common operations defined for all kinds of `InputStreams`, `OutputStreams`...

InputStream Basics

```
// reads some number of bytes and  
// puts in buffer array b  
int read(byte[] b) ;
```

```
// reads up to len bytes  
int read(byte[] b, int off, int len) ;
```

Both methods can throw `IOException`.
Both return -1 on EOF.

OutputStream Basics

```
// writes b.length bytes  
void write(byte[] b) ;
```

```
// writes len bytes starting  
// at offset off  
void write(byte[] b, int off, int len) ;
```

Both methods can throw `IOException`.

ServerSocket Class (TCP Passive Socket)

❑ Constructors:

```
ServerSocket(int port) ;
```

```
ServerSocket(int port, int backlog) ;
```

```
ServerSocket(int port, int backlog,  
             InetAddress bindAddr) ;
```

ServerSocket Methods

`Socket accept() ;`

`void close() ;`

`InetAddress getInetAddress() ;`


`int getLocalPort() ;`

`throw IOException, SecurityException`

Socket programming with TCP

Example client-server app:


- ❑ client reads line from standard input (**inFromUser** stream) , sends to server via socket (**outToServer** stream)
- ❑ server reads line from socket
- ❑ server converts line to uppercase, sends back to client
- ❑ client reads, prints modified line from socket (**inFromServer** stream)

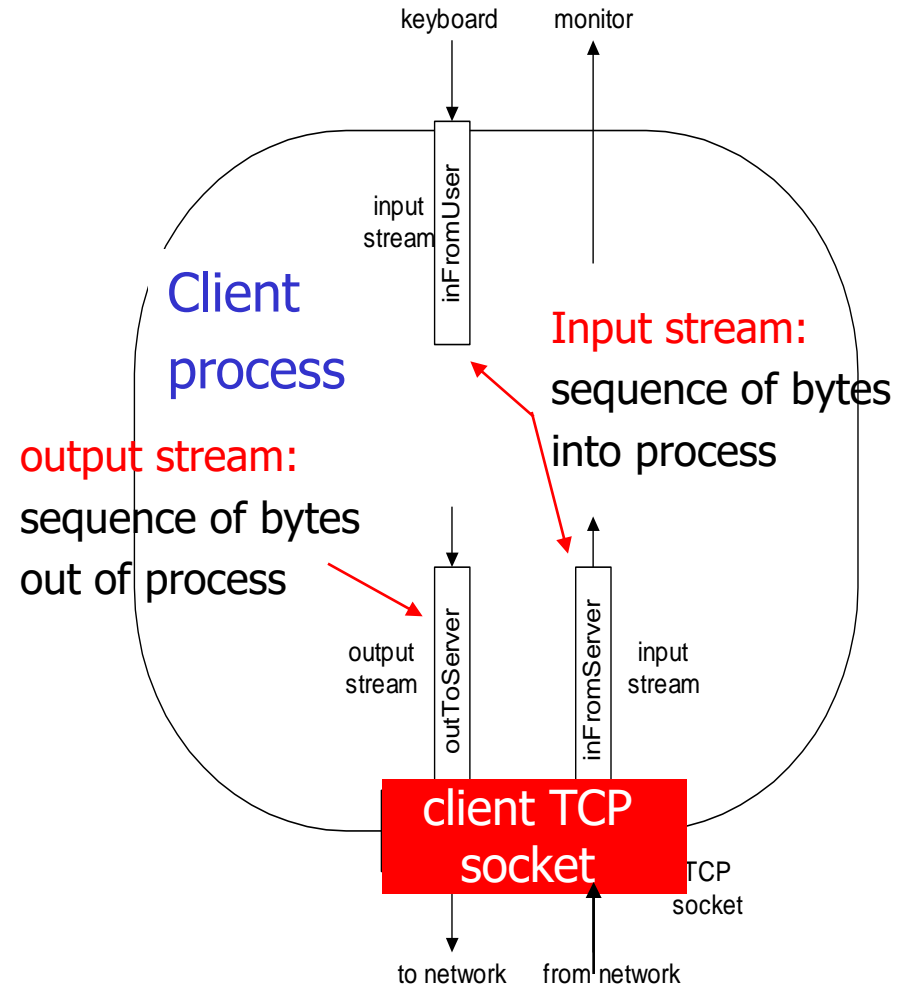

Client/server socket interaction: TCP

Server (running on **hostid**)

Client

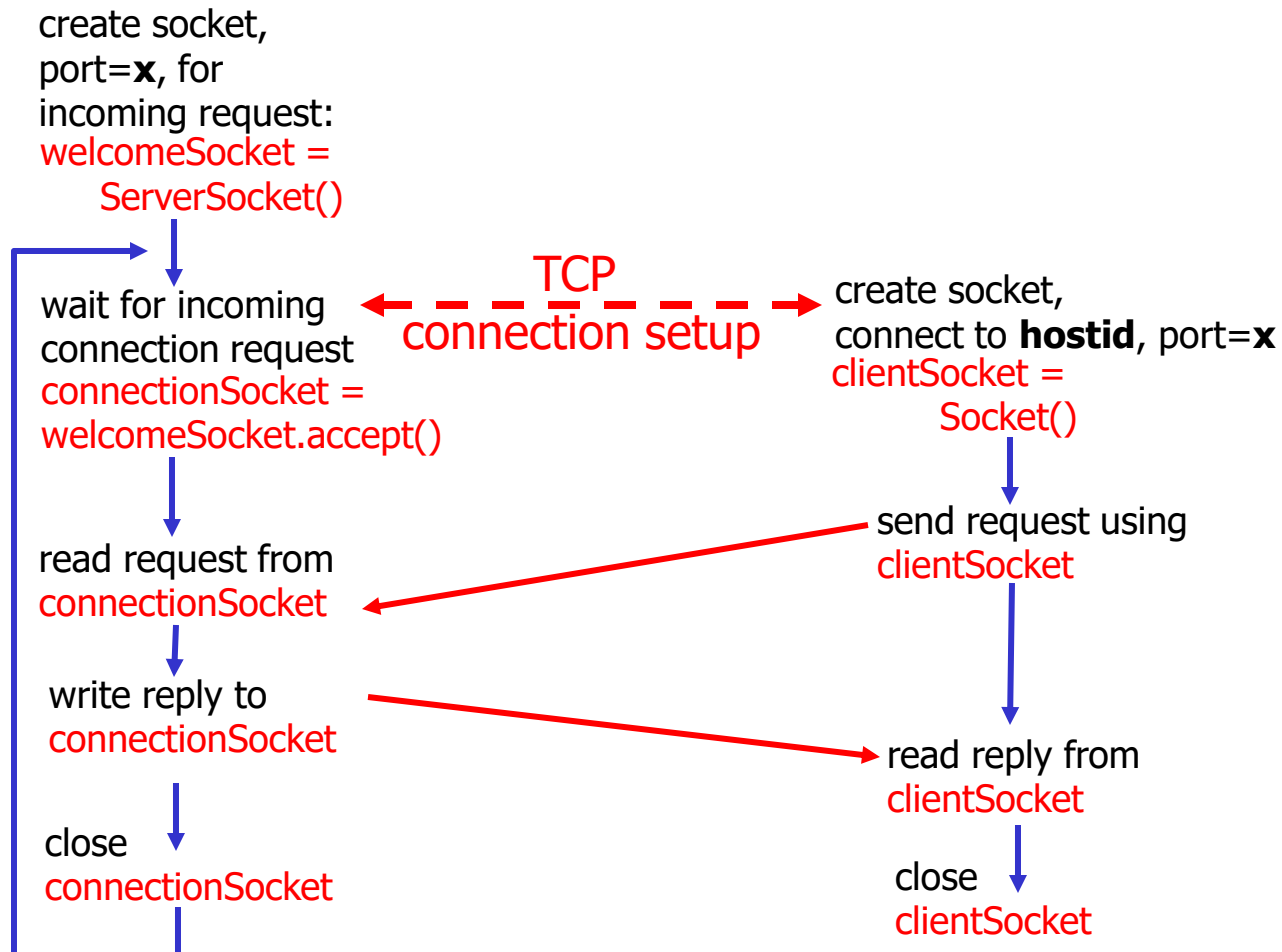

TCPClient.java

```
import java.io.*;
import java.net.*;

class TCPClient {
    public static void main(String argv[]) throws Exception
    {
        String sentence;
        String modifiedSentence;

        BufferedReader inFromUser =
            new BufferedReader(new InputStreamReader(System.in));

        Socket clientSocket = new Socket("hostname", 6789);

        DataOutputStream outToServer =
            new DataOutputStream(clientSocket.getOutputStream());
```

TCPClient.java

```
        BufferedReader inFromServer =  
            new BufferedReader(new  
InputStreamReader(clientSocket.getInputStream()));
```

```
sentence = inFromUser.readLine();
```

```
outToServer.writeBytes(sentence + '\n');
```

```
modifiedSentence = inFromServer.readLine();
```

```
System.out.println("FROM SERVER: " + modifiedSentence);
```

```
clientSocket.close();
```

```
}
```

```
}
```

TCPServer.java

```
import java.io.*;
import java.net.*;
class TCPServer {
    public static void main(String argv[]) throws Exception
    {
        String clientSentence;
        String capitalizedSentence;
```

```
ServerSocket welcomeSocket = new ServerSocket(6789);
```

```
while(true) {
```

```
Socket connectionSocket = welcomeSocket.accept();
```

```
    BufferedReader inFromClient = new BufferedReader(new
        InputStreamReader(connectionSocket.getInputStream()));
```

TCPServer.java

```
DataOutputStream outToClient =  
    new DataOutputStream(connectionSocket.getOutputStream());
```

```
clientSentence = inFromClient.readLine();
```

```
capitalizedSentence = clientSentence.toUpperCase() + '\n';
```

```
outToClient.writeBytes(capitalizedSentence);
```

```
    }  
  }  
}
```

UDP Sockets

- ❑ DatagramSocket class
- ❑ DatagramPacket class needed to specify the payload
 - ❖ incoming or outgoing

Socket Programming with UDP

□ UDP

- ❖ Connectionless and unreliable service.
- ❖ There isn't an initial handshaking phase.
- ❖ Doesn't have a pipe.
- ❖ transmitted data may be received out of order, or lost

□ Socket Programming with UDP

- ❖ No need for a welcoming socket.
- ❖ No streams are attached to the sockets.
- ❖ the sending hosts creates "packets" by attaching the IP destination address and port number to each batch of bytes.
- ❖ The receiving process must unravel to received packet to obtain the packet's information bytes.

JAVA UDP Sockets

❑ In Package java.net

❖ java.net.DatagramSocket

- A socket for sending and receiving datagram packets.
- Constructor and Methods
 - DatagramSocket(int port): Constructs a datagram socket and binds it to the specified port on the local host machine.
 - void receive(DatagramPacket p)
 - void send(DatagramPacket p)
 - void close()

DatagramSocket Constructors

```
DatagramSocket () ;
```

```
DatagramSocket (int port) ;
```

```
DatagramSocket (int port, InetAddress a) ;
```

All can throw `SocketException` or
`SecurityException`

Datagram Methods

```
void connect(InetAddress, int port);
```

```
void close();
```

```
void receive(DatagramPacket p);
```

```
void send(DatagramPacket p);
```

Lots more!

Datagram Packet

- ❑ Contain the payload
 - ❖ (a byte array)

- ❑ Can also be used to specify the destination address
 - ❖ when not using connected mode UDP

DatagramPacket Constructors

For receiving:

```
DatagramPacket( byte[] buf, int len);
```

For sending:

```
DatagramPacket( byte[] buf, int len  
                InetAddress a, int port);
```

DatagramPacket methods

```
byte[] getData();
```

```
void setData(byte[] buf);
```


```
void setAddress(InetAddress a);
```

```
void setPort(int port);
```

```
InetAddress getAddress();
```

```
int getPort();
```


Example: Java client (UDP)

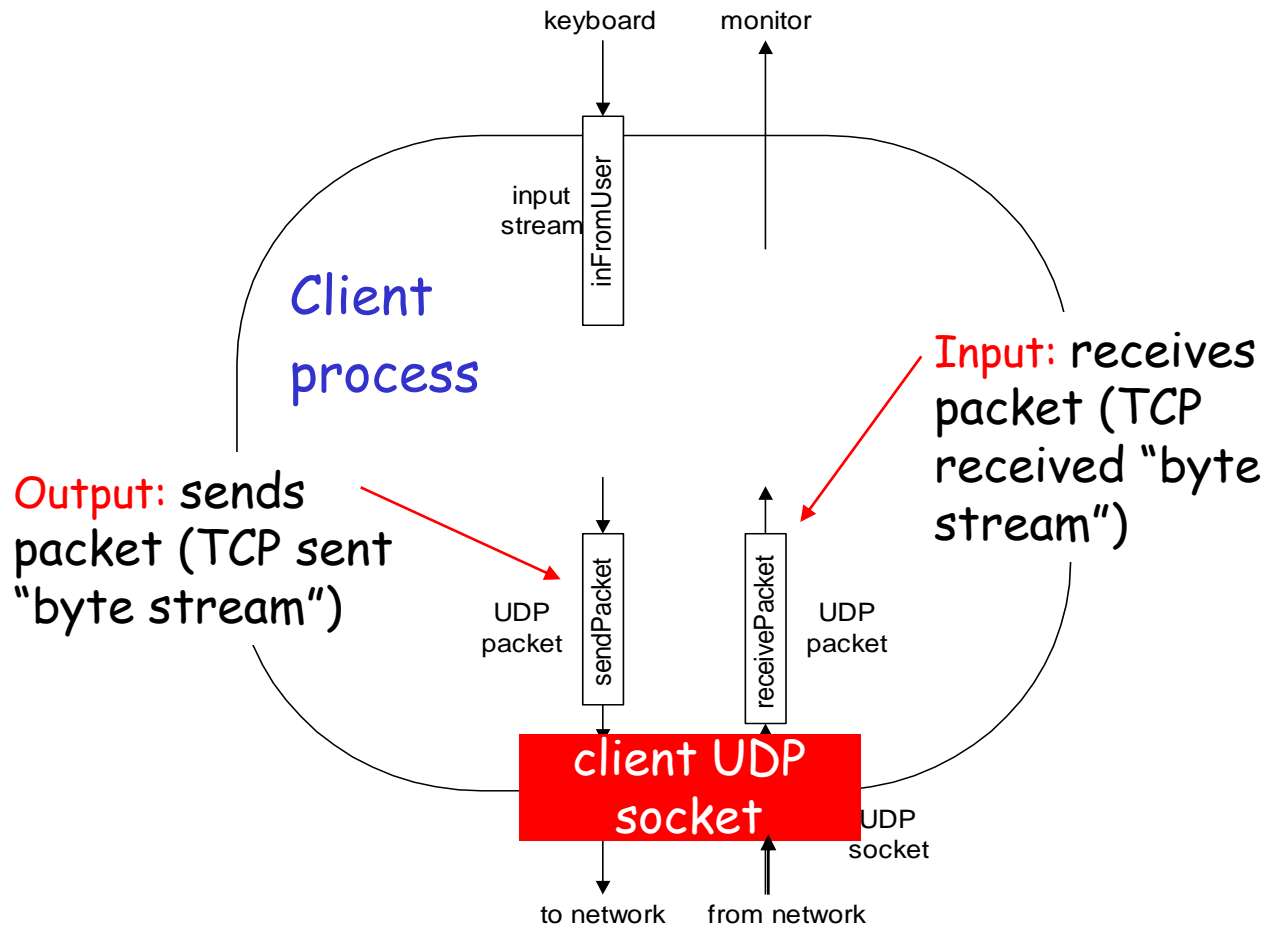

Client/server socket interaction: UDP

Server (running on **hostid**)

Client

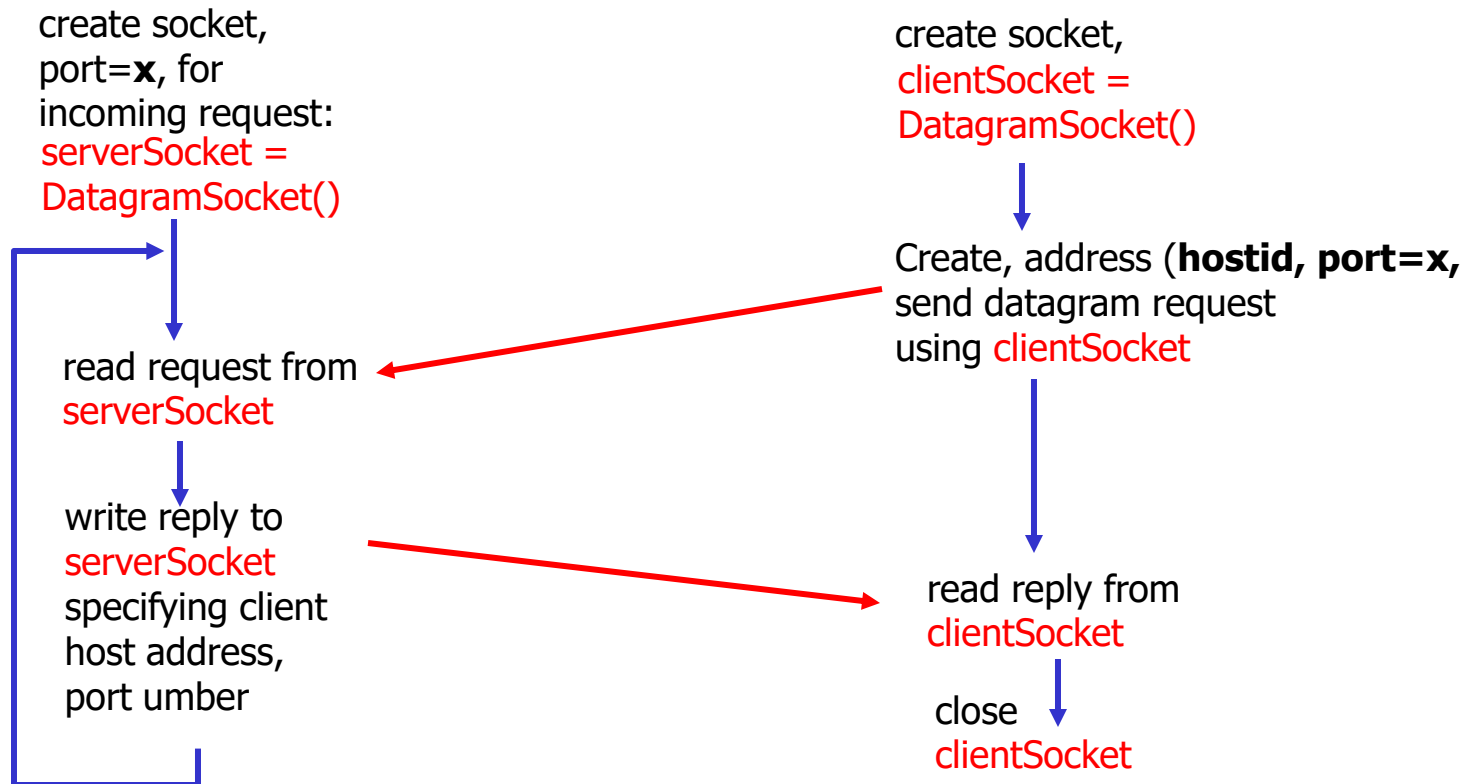

UDPClient.java

```
import java.io.*;
import java.net.*;

class UDPClient {
    public static void main(String args[]) throws Exception
    {
        BufferedReader inFromUser =
            new BufferedReader(new InputStreamReader(System.in));

        DatagramSocket clientSocket = new DatagramSocket();

        InetAddress IPAddress =
InetAddress.getByName("hostname");

        byte[] sendData = new byte[1024];
        byte[] receiveData = new byte[1024];

        String sentence = inFromUser.readLine();

        sendData = sentence.getBytes();
```

UDPClient.java

```
DatagramPacket sendPacket =  
    new DatagramPacket(sendData, sendData.length,  
    IPAddress, 9876);
```

```
clientSocket.send(sendPacket);
```

```
DatagramPacket receivePacket =  
    new DatagramPacket(receiveData, receiveData.length);
```

```
clientSocket.receive(receivePacket);
```

```
String modifiedSentence =  
    new String(receivePacket.getData());
```

```
System.out.println("FROM SERVER:" + modifiedSentence);
```

```
clientSocket.close();
```

```
    }  
}
```

UDPServer.java

```
import java.io.*;
import java.net.*;

class UDPServer {
    public static void main(String args[]) throws Exception
    {
        DatagramSocket serverSocket = new
DatagramSocket(9876);

        byte[] receiveData = new byte[1024];
        byte[] sendData = new byte[1024];

        while(true)
        {
            DatagramPacket receivePacket =
                new DatagramPacket(receiveData, receiveData.length);

            serverSocket.receive(receivePacket);

            String sentence = new String(receivePacket.getData());
```

UDPServer.java

```
InetAddress IPAddress = receivePacket.getAddress();
```

```
int port = receivePacket.getPort();
```

```
String capitalizedSentence = sentence.toUpperCase();
```

```
sendData = capitalizedSentence.getBytes();
```

```
DatagramPacket sendPacket =  
    new DatagramPacket(sendData, sendData.length, IPAddress, port);
```

```
serverSocket.send(sendPacket);
```

```
}
```

```
}
```

```
}
```

Socket functional calls

- ❑ `socket ()`: Create a socket
- ❑ `bind()`: bind a socket to a local IP address and port #
- ❑ `listen()`: passively waiting for connections
- ❑ `connect()`: initiating connection to another socket
- ❑ `accept()`: accept a new connection
- ❑ `Write()`: write data to a socket
- ❑ `Read()`: read data from a socket
- ❑ `sendto()`: send a datagram to another UDP socket
- ❑ `recvfrom()`: read a datagram from a UDP socket
- ❑ `close()`: close a socket (tear down the connection)

Java URL Class

- ❑ Represents a Uniform Resource Locator
 - ❖ scheme (protocol)
 - ❖ hostname
 - ❖ port
 - ❖ path
 - ❖ query string

Parsing

- You can use a URL object as a *parser*:

```
URL u = new URL("http://www.cs.unr.edu/");
```

```
System.out.println("Proto:" + u.getProtocol());
```

```
System.out.println("File:" + u.getFile());
```

URL construction

- ❑ You can also build a URL by setting each part individually:

```
URL u = new URL("http",  
                www.cs.unr.edu, 80, "/~mgunes/");  
  
System.out.println("URL:" + u.toExternalForm());  
  
System.out.println("URL: " + u);
```


Retrieving URL contents

- ❑ URL objects can retrieve the documents they refer to!
 - ❖ actually this depends on the protocol part of the URL.
 - ❖ HTTP is supported
 - ❖ File is supported ("file:///c:/foo.html")
 - ❖ You can get "Protocol Handlers" for other protocols.
- ❑ There are a number of ways to do this:

`Object getContent() ;`

`InputStream openStream() ;`

`URLConnection openConnection() ;`

Getting Header Information

- ❑ There are methods that return information extracted from response headers:

```
String getContentType() ;
```

```
String getContentLength() ;
```

```
long getLastModified() ;
```

URLConnection

- ❑ Represents the connection (not the URL itself).
- ❑ More control than URL
 - ❖ can write to the connection (send POST data).
 - ❖ can set request headers.
- ❑ Closely tied to HTTP