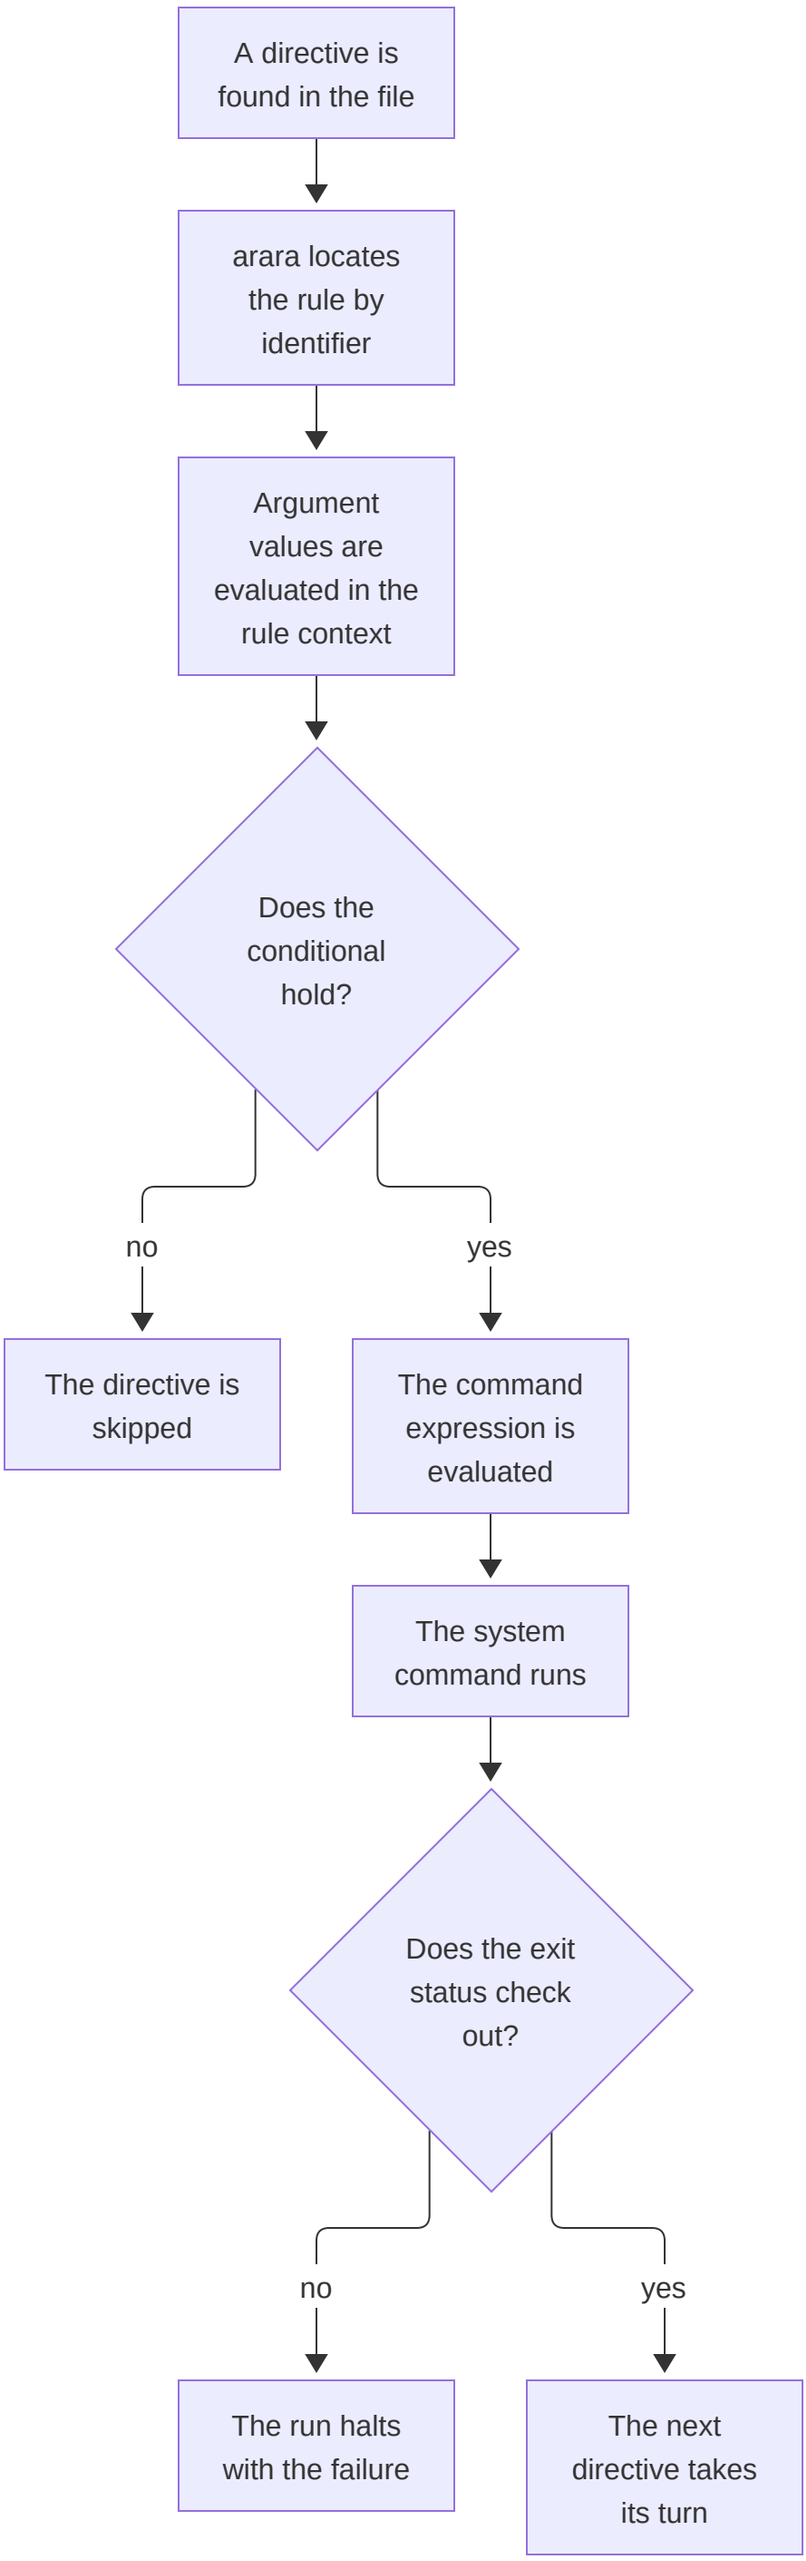
A directive is found in the file
arara locates the rule by identifier
Argument values are evaluated in the rule context
Does the conditional hold?
no
yes
The directive is skipped
The command expression is evaluated
The system command runs
Does the exit status check out?
no
yes
The run halts with the failure
The next directive takes its turn