
## **Multiple Choice Questions (part-2):**

1.The HTML was developed by:
a)Hakon lie b)William hash c)Brendon eich d)Tim-berners lee
2.Each cell of a table is represented using a element.
a) <dd> b)<li>c) d)</li></dd>
3.Its purpose is to represent the heading for either a column or a row.
a) b) c) <dt> d)</dt>
4.To show an empty cell of a row ,using tag.
a) b) c) d)both a & b
5.To merge any cell of a row using attribute.
a)colspan b)rowspan c)columnspan d)both a & c
6.To change color of any cell using attribute in .
a)color b)background c)bgcolor d)both b & c
7.To merge any cell of a column using attribute.
a)colspan b)rowspan c)columnspan d)both a & c
8.To spacing inside of any cell using attribute.
a)spacecell b)cellpadding c)cellspacing d)cellwidth
9.This element should always carry the action attribute and will usually have a method and ic attribute too.
a) <vedio> b)<img/> c)<a> d)<form></form></a></vedio>
10.Its value is the URL for the page on the

server that will receive the information in the form when it submitted.
a)href b)value c)action d)name
11. You should use the method if your form contains sensitive data like password.
a)get b)delay c)post d)both a & c
12. You can use the attribute to limit the number of characters.
a)maximum b)length c)limit d)maxlength
13. The value of this attribute identifies the form control and is sent along with the information they enter to the server.
a)type b)class c)name d)id
14. The size attribute should not be used on new forms.
a)maxlength b)value c)size d)name
15.The element is used to create a mutli-line text input.
a)fieldset b)textarea c)legend d)multi
16.The attribute indicates how wide the text area should be.
a)rows b)width c)cols d)size
17 value in type used for radio buttons.
a)round b)circle c)radio d)buttons
18.The attribute indicates the value that is sent to the server for the selected option.
a)name b)value c)id d)type
19.The attribute can be used to indicate which value (if any) should be selected when the page loads.
a)required b)selected c)checked d)marked
20.For single selection of any form ,we use type.

and the first translation to the former whom it acres

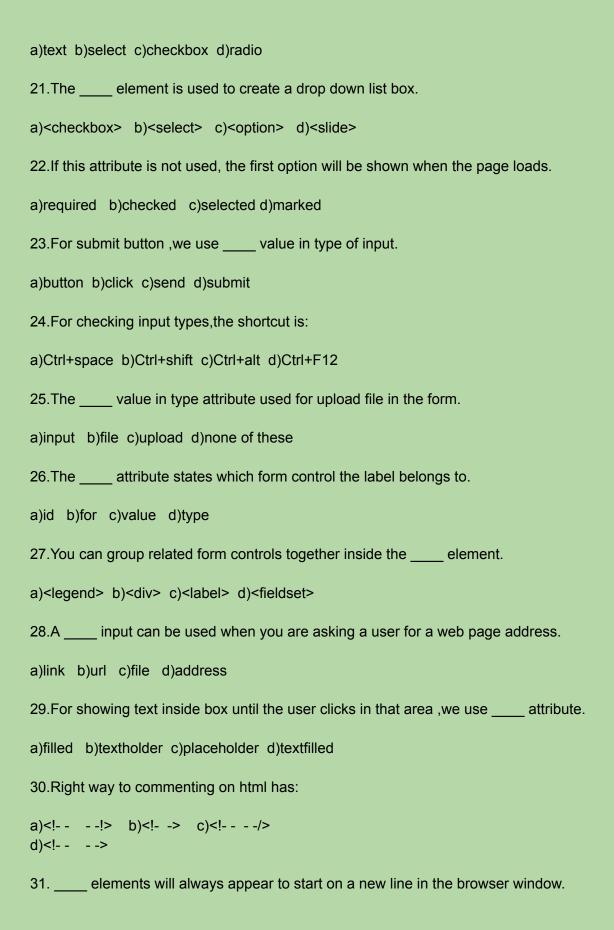

a)list b)block c)inline d)both a & b
32.Which elements is not considered in inline elements?
a) <span> b)<em> c)<mark> d)none of these</mark></em></span>
33 elements is used for highlighting specific text.
a) <strong> b)<em> c)<mark> d)<cite></cite></mark></em></strong>
34.The element allows you to group a set of elements together in one block-level box.
a) <title> b)&lt;body&gt; c)&lt;div&gt; d)&lt;header&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;35.It can also make it easier to follow your code if you have used elements to hold each section of the page.&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)&lt;id&gt; b)&lt;body&gt; c)&lt;head&gt; d)&lt;div&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;36.The term iframe is an abbreviation of frame.&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)inter b)inline c)input d)none of these&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;37.In behavior attribute of marquee, value is used for bounce back.&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)slide b)back c)alternate d)none of these&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;38.In behavior attribute of marquee, value is used for speeding.&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)speed b)amount c)loop d)scrollamount&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;39.The CSS property is used in tables to blank any row with its border disappear.&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)cellspace b)cell c)emptycell d)blankcell&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;40.To change icon on browser page,we use&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;a)link:symbol b)link:icon c)link:favicon d)link:mark&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;41.Any online video or map getting on a web page through a)&lt;a&gt; b)&lt;img&gt; c)&lt;video&gt; d)&lt;iframe&gt;&lt;/td&gt;&lt;/tr&gt;&lt;/tbody&gt;&lt;/table&gt;</title>

42. The tag allows you to supply all kinds of information about your web page.
a)title b)meta c)header d)html
43 characters are used to include special characters in your pages such as <, >, and ©
a)special b)semantic c)markup d)escape
44.The attributes allow you to identify particular elements.
a)class & span b)class & div c)id & class d)span & div
45.After html4 the version of html was released:
a)HTML5 b)HTML 4.0 c)XHTML d)XHTML 1.0
46 keyword is must use to appear audio on browser page.
a)autoplay b)loop c)controls d)preload
47. rgb stands for:
a)rate graphic background b)rate graphic border c)red green blue d)red green black
48.URL stands for:
a)Unique Rank locator b)Uniform Record locator c)Uniform Resource locator d)Uniform Resource link
49. CSS stands for:
a)Code Style sheet b)Code Styling short c)Cascading Style sort d)Cascading Style sheet

50. HTTP stands for:

- a)Hyper text transition protect
- b)Hyper text transfer protector
- c)Hyper text transfer protocol
- d)Hyper text transfer provide

## Prepared by: "Ismail Shah"

©{Based on Jon Duckett's "HTML & CSS: Design and Build Websites"}

## **Part 2 Answers:**

```
 [(1-d),(2-c),(3-a),(4-d),(5-a),(6-c),(7-b),\\ (8-b),(9-d),(10-c),(11-c),(12-d),(13-c),\\ (14-c),(15-b),(16-c),(17-c),(18-b),(19-c),\\ (20-d),(21-b),(22-c),(23-d),(24-a),(25-b),\\ (26-b),(27-d),(28-b),(29-c),(30-d),(31-b),\\ (32-d),(33-c),(34-c),(35-d),(36-b),(37-c),\\ (38-d),(39-c),(40-c),(41-d),(42-b),(43-d),\\ (44-c),(45-d),(46-c),(47-c),(48-c),(49-d),\\ (50-c)]
```