Independent CI1509: missing runner input

2026-11-12 · exact8f456314 · claim55e8da · unsigned

OverallCI43232186220 fails. Originalreference job succeeds25native/98reference plus5 integrations,one oldignored. Independent32standalone passes,then exits127 at driverline48 because rg is absent. Algebra/proofs NOT RUN. [pcc:unverified]

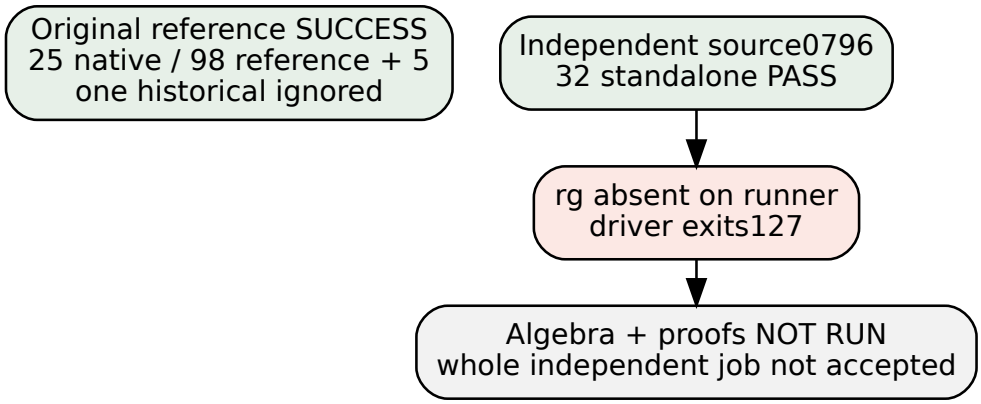

Execution-stage diagram;there are no comparable performance arms or timing protocol. Missing stages do not become mathematical failures or passes.

Diagnosis and correction

The driver introduced an undeclared ripgrep dependency. Local03 passed on a host where rg exists;the root0796 own four-jobCI is a separate workflow. V4 changes only three textparsers to equivalent portablegrep,globs the same Lean files and checks required commands before output allocation. All full counts,source0796 pin,locks,zero-trusted and source guards remain required. No cryptographic source needs a change. [pcc:unverified]

Preservation and remaining checks

Both whole decoded UTF8joblogs,run/jobs API,custody,standardXZ,raw/archive SHA256 and exact roundtrip remain in evidence under CI43232186220;rootmirror e76fea preserves them too. Original98Rust/check.sh/75a pin/reference75minjob remain unchanged. V4 still requires complete no-rg replay04 and new exact- head CI of both jobs. This failed source is immutable and supplies neither that success nor a scientific signature. [pcc:unverified]

The source-linked REPORT.md and problems/chained-transfer-independent-input- closure.md retain acceptance and next actions. The next replay uses a shim that rejects every rg invocation and explicit wrongHEAD/dirtyJSON/missingtool admissions before the full32/23/32module corpus. KB/atlas inaccessible; existing protocol,exactsource and full diagnostics are the fallback sources. No paid job,benchmark or relaxed criterion. [pcc:unverified]