
Run0: retained failure and censored diagnostics

18 October2026; public ECC2K-130/F4 continuation

No GPU benchmark or frontier solve executed. The archived packet omitted two manifest-bound documents and the frontier script's executable mode. All39 ECC source hashes passed, but the launch gate failed before ECC execution. Hardware/ECC/negation/frontier exits were1/3/0/3. Root retains this failed attempt and corrected delivery is a separate run.

The recovered archive has15,160 bytes and SHA256 `26d26efe1f6e8d9917c3256720065315dd37ee3c31ce909131139207938af217`. Its file manifest and raw outputs are preserved under`remote/run-0/`. Native hardware receipts identify RTX5090, driver580.65.06 and CUDA13.0; these do not prove compatibility with the pinned CUDA13.3 build. The instance exposes an AMD EPYC7663 and a124,999,999,488-byte memory cgroup. No host-isolated timing claim is made.

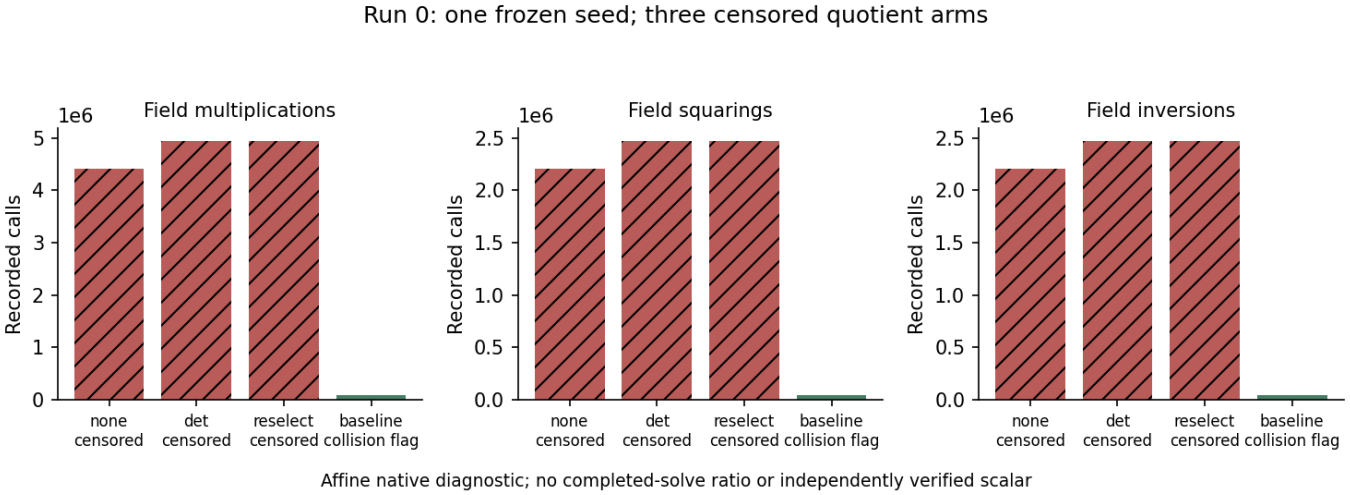

All four commands returned0; three scientific outcomes are censored. The none/deterministic-break/reselect quotient arms each reached 2,208,379 steps without a collision. They reported0/1/1 distinguished points. The baseline reported a collision after42,678 steps and10DPs. The plotted multiplication/squaring/inversion counts are copied directly from native outputs, with no M-equivalent conversion. Censored attempts cannot supply a completed-solve ratio; a collision flag is not independent verification of a recovered discrete logarithm.

The exact contract is H-RHO-bc6ea6 / EXP-RHO-60da4f. Its existing native implementation uses affine arithmetic despite the specified Jacobian model; that deviation and all existing censoring/control limits remain explicit. This one-seed four-arm replay is instrument continuation only.

Evidence. See`RUN0_RESULTS.md`, the native per-arm `.command/.stdout/.stderr/.exit/.resources` files, launch source verification, authenticated`http-job-status-run-0.json`, and the original packet. A corrected run1 is separate and its outcome is not asserted here. All original scientific acceptance criteria remain open after run0. Canonical IC leaderboard and campaign rate figures are unchanged: run0 adds no verified GPU throughput or complete ECDLP cost.