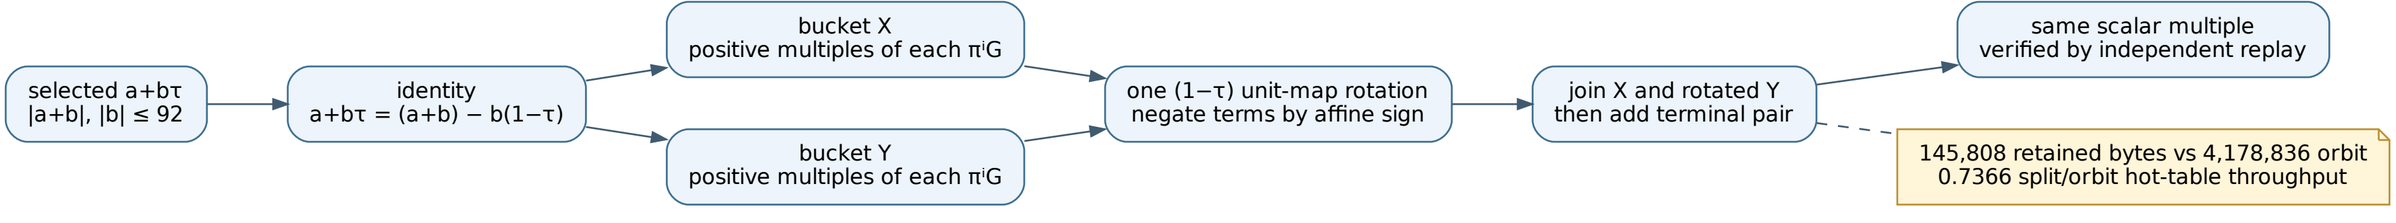
Unit-basis split for one 140−τ digit and terminal pair
selected a+bτ
|a+b|, |b| ≤ 92
identity
a+bτ = (a+b) − b(1−τ)
bucket X
positive multiples of each πⁱG
bucket Y
positive multiples of each πⁱG
one (1−τ) unit-map rotation
negate terms by affine sign
join X and rotated Y
then add terminal pair
same scalar multiple
verified by independent replay
145,808 retained bytes vs 4,178,836 orbit
0.7366 split/orbit hot-table throughput