Completed-transfer individual descent

2026-11-13 · five known-answer public targets · all standing unsigned



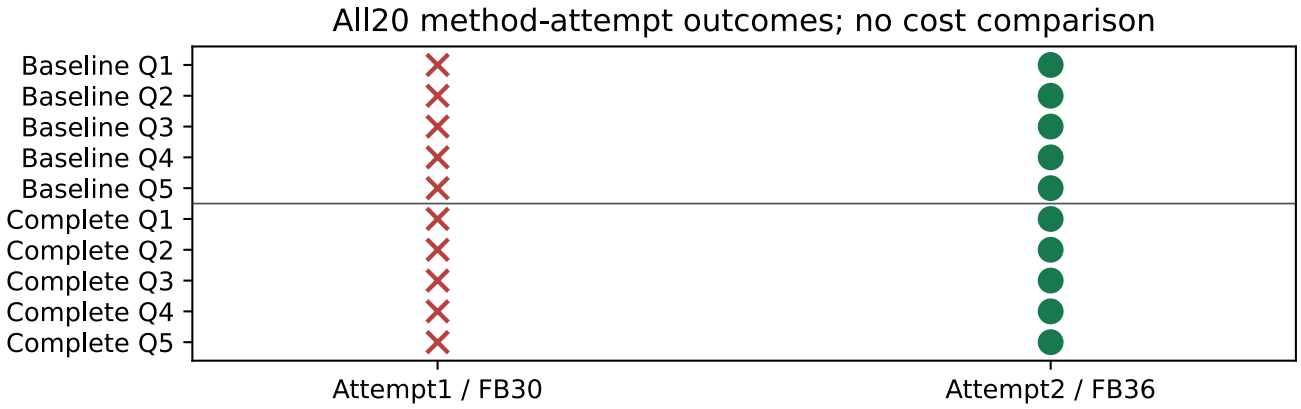

Observed unsigned5ff070: one unfiltered serial Rust test passes, zero failed/ignored/filtered, all2307 input hashes unchanged. All five candidate public-target solves and the original baseline succeed under the same frozen six-attempt cap. The10 paired attempts preserve5 initial26-row/30-column failures in each method, followed by5 FB36 successes in each. Every reported scalar passes the original independent source engine.

Prospective boundary: active protocol74e00a was actually normally published in ready PR1523 at093134ba BEFORE candidate implementation (7823d2). This is the same q223/seed1 source, K=F223[z]/(z³−3),ell2773073/order11092292. Known witnesses remain outside public requests and both public solvers. The original N4 algorithm is the named baseline; moving target construction is not a speedup.

Exact change, controls and remaining costs

Implementation: the complete solver derivative differs by only6 literal substitutions: bind the certified CheckedInstance; construct the actual completed adapter at the actual selected P0; replace split-cubics triple admission with completed Gen spaces; record3 maps; and reduce each actual Gen. Relation collection, matrix/linear-algebra work, class descent walk, logarithm assignment, final recovery and original rho bytes remain. Whole original source/diff and exact substitutions are retained.

Geometry: the helper obtains T from the actual negative-infinity branch and computes T−I(P) through the original source group, where I(v,w)=(v+a2/3,w). This is kappa(lambda^{-1}P), so the completed divisor space extends the old raw map. It keeps the affine geometric origin: the original three-target differences cancel that same origin. There is no fitted scalar shift, inverse/DLP table, old split-map fallback or generic-DLP fallback.

Native compatibility controls: rebuild actual winning P0=[1,74,153], require its nonzero origin, evaluate32 complete points and match all16 legacy admitted split classes. All five public point half-inverses and affine difference identities pass with a nonzero ratio base. Candidate successes report exactly3 complete maps. The previous actual V2 control panels and written divisor/Ciani argument remain in V2_MAPS_01.md; the17 conditional/integer Lean bindings do not formalize the N4 relation kernel or all actual Picard geometry.

Independent parent checks are settled: published093 passes full0815f7 with469guards and17 phase pairs;both scientific CI workflows succeed at that exact head. Auditb6c1db matches all25 native records and17 original canonical claim digests. The first collector regex omitted the digit2 in V2 names;whole partial01 and frozen7176d7 correction are retained before complete02. This is a bookkeeping correction,not a missing native record or changed test.

Limits and next task: this new candidate result is a bounded known-answer correctness smoke,not an independent candidate full/CI replay or performance comparison. The dependency cache is reused and non-cold. Original counters omit arithmetic in the separate completed-map engine;all raw timings/counters remain but no totalS,ratio or computational advantage is inferred. Next commit/source publication,then clean independent candidate replay and ownCI. Actual S3 checkpoint/livebudget/capacity and strongest applicable references are required for performance experiments.

Evidence

5ff070/native01;74e00a/activeprotocol02;093134ba/actualnormalpublication;7823d2/precodeboundary;completed-descent/derived/source-pins.json/full literal diff;parent0815f7/b6c1db. Native raw timings are correctness diagnostics,not an admitted cost comparison.