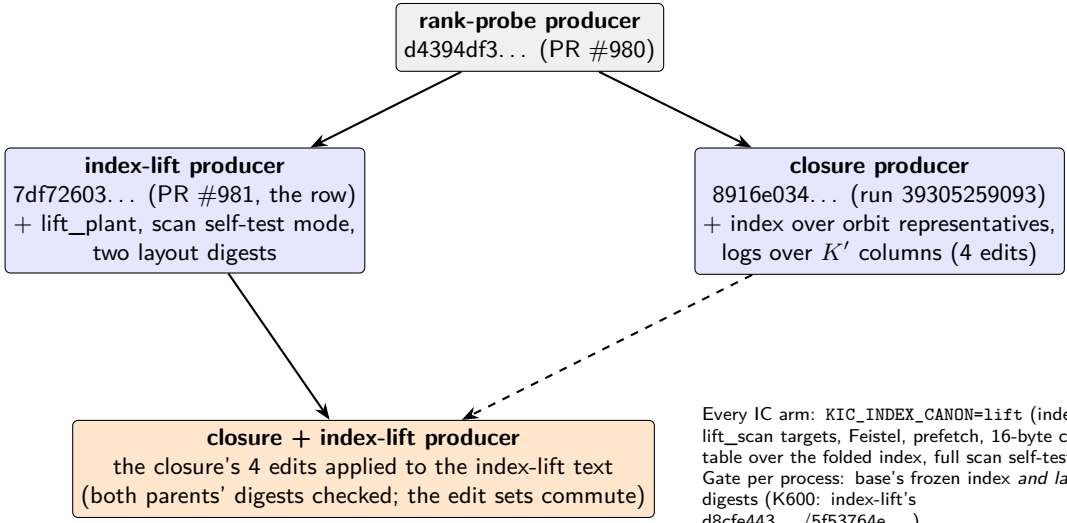


Every IC arm: `KIC_INDEX_CANON=lift` (index build), lift_scan targets, Feistel, prefetch, 16-byte compact table over the folded index, full scan self-test. Gate per process: base's frozen index *and layout* digests (K600: index-lift's d8cfe443... /5f53764e...).

cold segments C1..C20: one fresh pinned process per arm on new point s$(i-1)$ (role closureindexlift-cold-v1); Q0 on cPI, cM38I, cM10I

cPI	**cM38I**	cM38Iaa	cM10I	rT
K600 (baseline)	primary	A/A	secondary	tuned rho

rank blocks K1..K16, new seeds 1101..1116; written tables must equal the frozen verified tables; probe-law band for kM38I

kPI	**kM38I**	kM38Iaa	kM38IX	kM10I
K600, 4 blocks	16 blocks	A/A, 16	planted, 4	8 blocks

Primary (frozen): $R = \dfrac{\overline{\mathrm{rank}}(kPI) + \overline{\mathrm{cold}}(cPI)}{\overline{\mathrm{rank}}(kM38I) + \overline{\mathrm{cold}}(cM38I)}$ (end-to-end cold, against the index-lift row); improvement iff the 95% lower bound > 1; bootstrap: each rank arm's blocks then attempts on their own, points paired; every gate must be true.