
One binary for every IC arm: `ic_online_closure_indexlift_r770`, the parent's derivation verbatim (source 1d328b2e… = PR #997's frozen digest; closure headers, 25 copied files and the parent protocol ff5b4cbf… digest-checked; no code change). Every IC process: `KIC_INDEX_CANON=lift`, full scan self-test, its base's frozen index *and layout* digests.

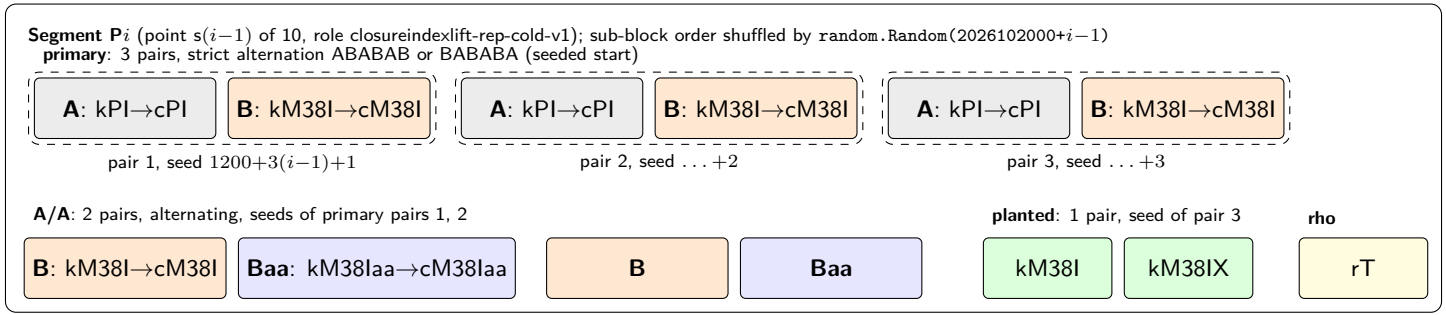

Run order: O1 (Q0 on cPI, cM38I: exactness) then P1 . . . P10; 232 fresh processes, each pinned to one CPU of one ubuntu-24.04 runner; time guard at 285 min (any skip: invalid). Side = rank process (rank stage with the pair's seed, then the point) followed by cold process (verified table, then the point).

Primary (frozen): $E2E(\text{side}) = \text{rank_stage}(k) + \text{cold}(c)$, $R = \dfrac{\sum_{30\ \text{pairs}} E2E(A)}{\sum_{30\ \text{pairs}} E2E(B)}$; 95% two-stage paired bootstrap (points, then pairs within points; A and B together), 10,000 draws, seed 20261020. **Improvement iff the lower bound > 1.** Controls: A/A $E2E(B)/E2E(Baa)$ and cold inside $[0.97, 1.03]$; planted kM38IX/kM38I per attempt, lower bound > 1; planted closure corruptions rejected. Every gate true (unknown = fail).