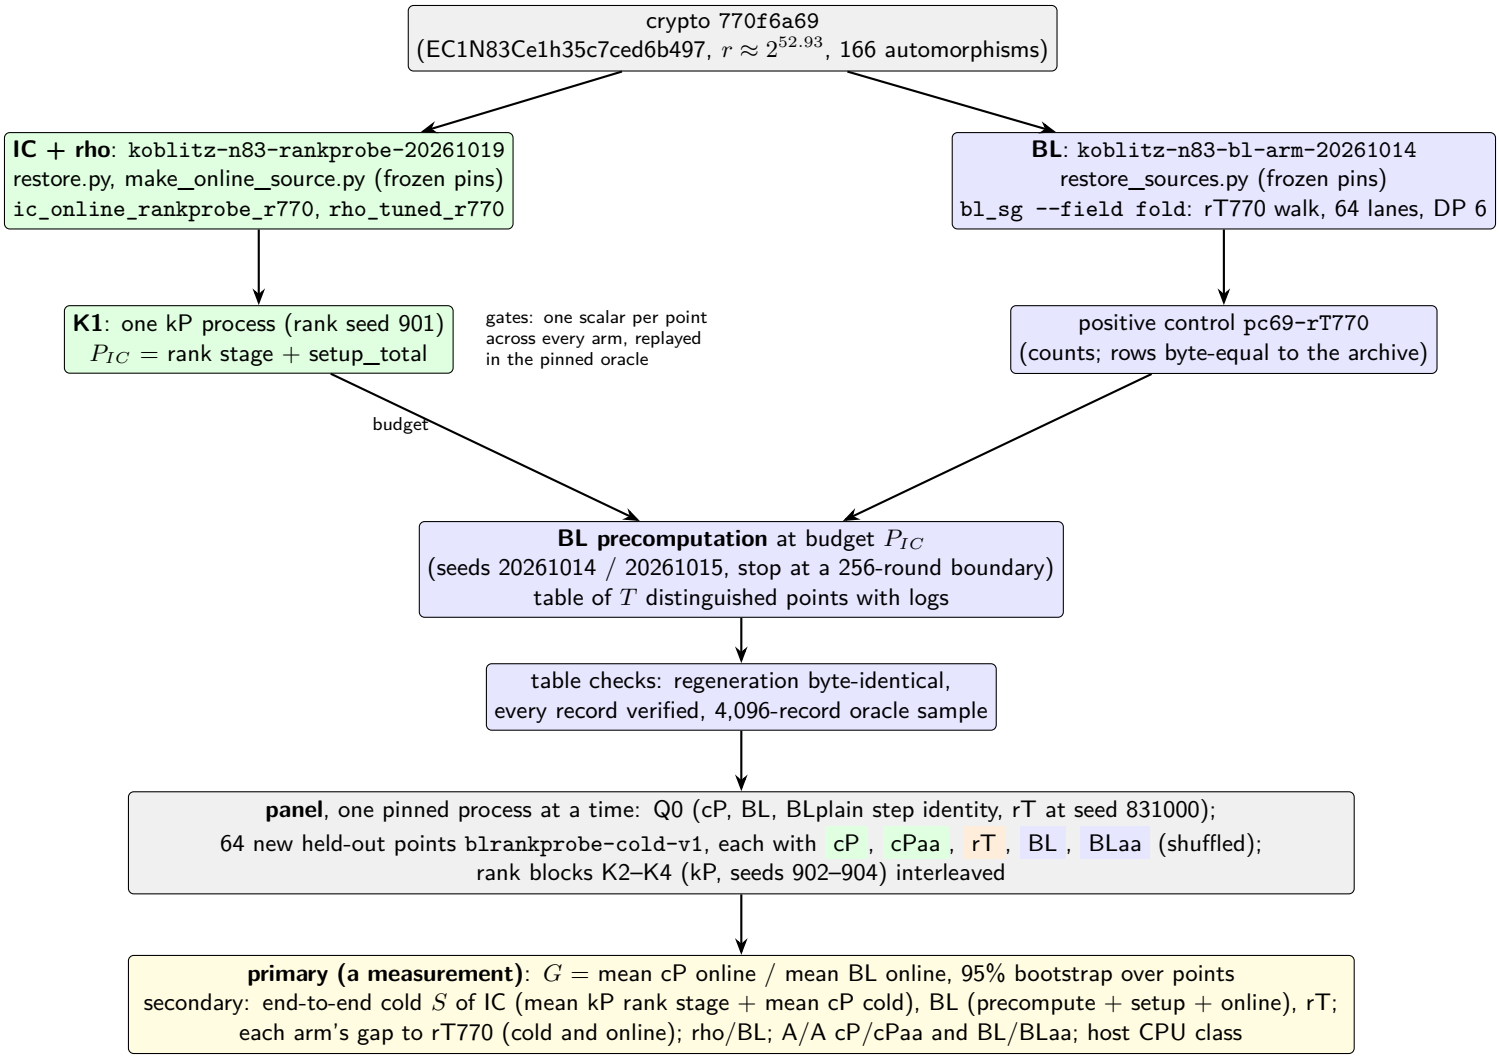

crypto 770f6a69
(EC1N83Ce1h35c7ced6b497, $r \approx 2^{52.93}$, 166 automorphisms)
IC + rho: koblitz-n83-rankprobe-20261019
restore.py, make_online_source.py (frozen pins)
ic_online_rankprobe_r770, rho_tuned_r770
BL: koblitz-n83-bl-arm-20261014
restore_sources.py (frozen pins)
bl_sg --field fold: rT770 walk, 64 lanes, DP 6
K1: one kP process (rank seed 901)
P_{IC} = rank stage + setup_total
gates: one scalar per point
across every arm, replayed
in the pinned oracle
positive control pc69-rT770
(counts; rows byte-equal to the archive)
budget
BL precomputation at budget P_{IC}
(seeds 20261014 / 20261015, stop at a 256-round boundary)
table of T distinguished points with logs
table checks: regeneration byte-identical,
every record verified, 4,096-record oracle sample
panel, one pinned process at a time: Q0 (cP, BL, BLplain step identity, rT at seed 831000);
64 new held-out points blrankprobe-cold-v1, each with cP , cPaa , rT , BL , BLaa (shuffled);
rank blocks K2–K4 (kP, seeds 902–904) interleaved
primary (a measurement): G = mean cP online / mean BL online, 95% bootstrap over points
secondary: end-to-end cold S of IC (mean kP rank stage + mean cP cold), BL (precompute + setup + online), rT;
each arm's gap to rT770 (cold and online); rho/BL; A/A cP/cPaa and BL/BLaa; host CPU class