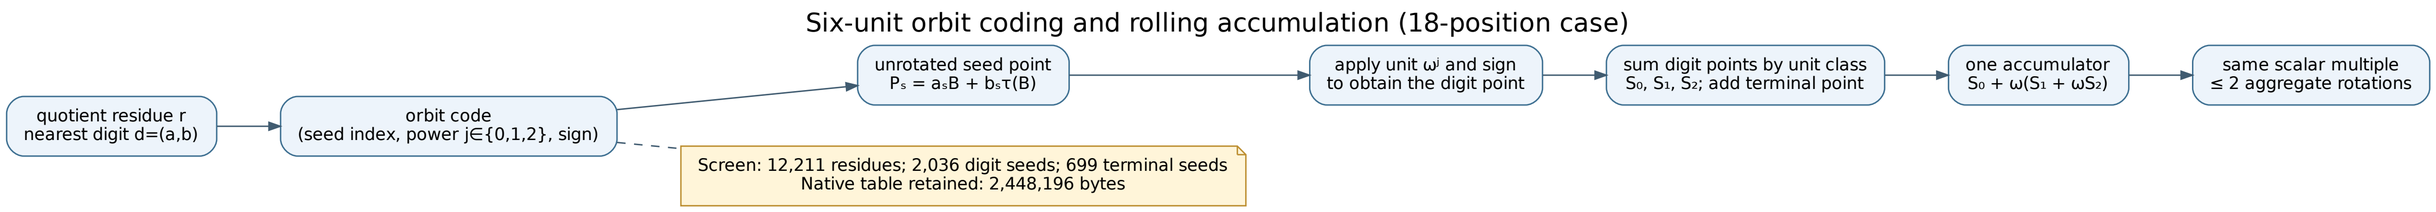
Six-unit orbit coding and rolling accumulation (18-position case)
quotient residue r
nearest digit d=(a,b)
orbit code
(seed index, power j∈{0,1,2}, sign)
unrotated seed point
Ps = asB + bsτ(B)
apply unit ωʲ and sign
to obtain the digit point
sum digit points by unit class
S0, S1, S2; add terminal point
one accumulator
S0 + ω(S1 + ωS2)
same scalar multiple
≤ 2 aggregate rotations
Screen: 12,211 residues; 2,036 digit seeds; 699 terminal seeds
Native table retained: 2,448,196 bytes