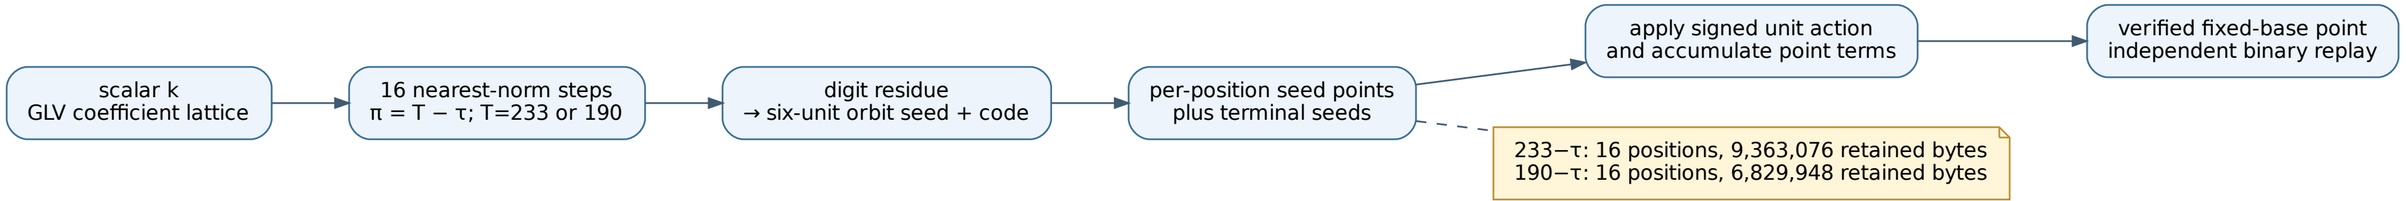
Six-unit prime-norm radix recoding on the secp256k1 GLV lattice
scalar k
GLV coefficient lattice
16 nearest-norm steps
π = T − τ; T=233 or 190
digit residue
→ six-unit orbit seed + code
per-position seed points
plus terminal seeds
apply signed unit action
and accumulate point terms
verified fixed-base point
independent binary replay
233−τ: 16 positions, 9,363,076 retained bytes
190−τ: 16 positions, 6,829,948 retained bytes