Follow-up sources: dependent auxiliary points

Four plain organization queries covered pair-sum factor bases and dependent/formal auxiliary logarithms. All returned excerpts are retained in ../retrieval.json. Two complete crypto primary texts were fetched at commit 7ec6459ef1afa599735f9ce387c7d73fee7ea8b4; exact Git blob checks and SHA256/bytes are in ../primary-integrity.json. Root read both full texts. This is a scoped static source follow-up, not a corpus-wide absence claim, native replay or independent scientific review.

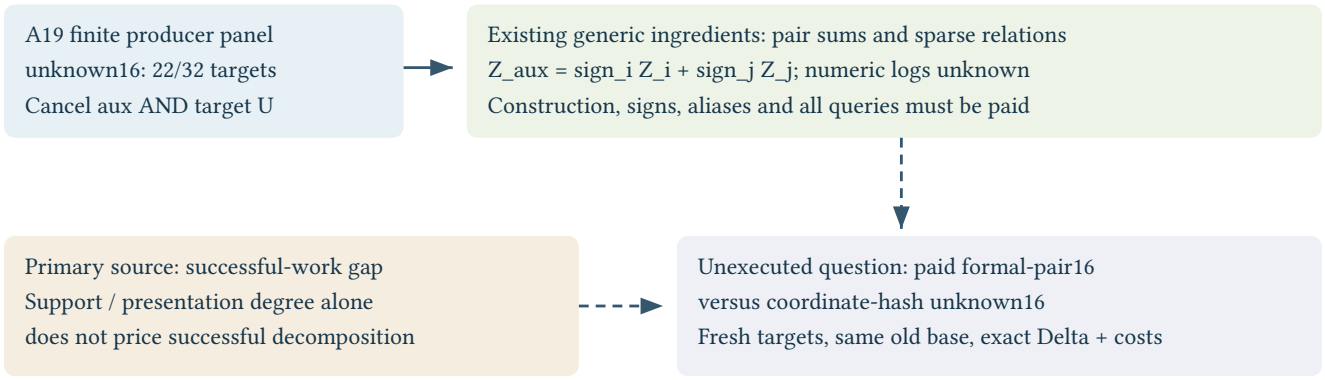

Solid edge: retained finite producer observation and existing algebraic ingredients. Dashed edges: proposed future discriminator, not tested improvements or verified performance.

What the sources contribute

The current problem record “factor-base-shape-to-successful-work” explicitly leaves successful native decomposition, setup, membership, witness selection and independent relation rank unpriced even where finite support improves. Its later same-base recoding continuation separately reports canonical presentation-degree facts and still requires measured branch-summed work. No proof or performance standing transfers from this source read.

The historical prime-field synthesis provides background on structured bases, descent and generic relation search. Its broad presentation-invariance/no-go and initial-minor narratives are not adopted as proved facts here; current successful-work obligations require an actual system/order/certificate and matched execution. It does not establish impossibility of the proposed finite engineering comparison. Search also locates existing binary-field pair-sum/coverage selectors; those are prior methods and different field scopes, not a prime-field improvement receipt.

Concrete next question, still unexecuted

A public point A = sign_i B_i + sign_j B_j has an exact formal logarithm relation even when none of the three numeric logarithms is known. A fixed sixteen-point dictionary built this way could be compared with A19′s coordinate-hash unknown16 and independently paid known16, on the unchanged old norm base and fresh public targets. Definition rows alone add zero old-base information after eliminating A; any contribution must come from actual collected relations or explicit own public coincidences.

Freeze first-success pair/sign/alias rules before targets, charge all draws/construction/rejections/storage, retain the definition equations in native matrices and K attribution, and prohibit using unknown numeric labels in the P constructor. Query all mixed geometries; keep complete auxiliary-and-target cancellation and original-native/dense/kernel certificates. Composite three-sum rows may merely realize higher-arity generic old-base sums; no new algebra, symmetry, exponent, rho or novelty claim is proposed. The question is finite useful information and named target recovery at paid costs.

A19 raw publication a58e290e7d45c21e9d84ed012fef2029e8ea2b0a records targets11/32 norm,22/32 unknown16 and30/32 known16. Those are producer-unverified under PCC-20261107-c76c01, with separate unweighted costs and nonrecoveries. Source search and this candidate do not allocate another attempt or reset the original deadline. Prym B1/B2 and Dickson depth4 already executed in their recorded finite scopes; their historical “unexecuted” continuation notes are not current run status.