Bounded interstage receive selection

TASK-20261105-58f55b / EXP-ECDLP-356403

Replace only the server receive selection that imposed5s whenever every observed arm was closed. The existing finite quiet_timeout is used between stages as well as during an open stage. This gives driver postprocessing the frozen receive allowance without changing any mathematical program.

Bounded receive choice at the stage boundary

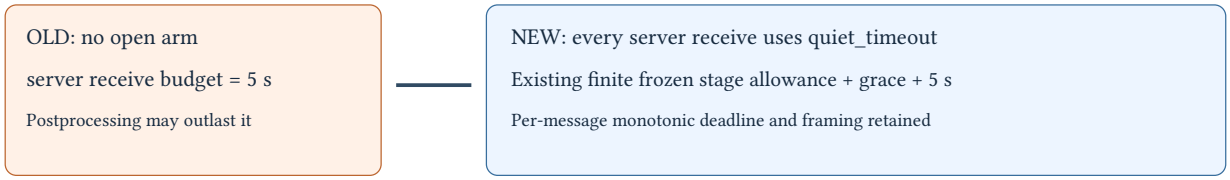

Client coordination remains 5 s. No timeout is made infinite.

Static implementation diagram; OLD/NEW behavioral controls belong to the independent review.

Static scope. Only observer.py and its manifest entry change. All59 capture keys and the other57 file hashes remain exact. All non-serve function ASTs, including closure loading and verification, are unchanged. No control has run in this task. [pcc:unverified]

Boundary. Client coordination remains5s; existing framed-message deadlines, strict JSON, one-MiB framing and finite validated quiet allowance remain. No source/math/checker change beyond the stated selection is proposed.

Evidence. The retained first native attempt had an observer TimeoutError and candidate barrier failure. It supplies no completed candidate/BSGS measurement. PCC-20261105-9149bd remains unverified.

Next check. Independent OLD/NEW fixed F11/F23 gap pair, exactly as frozen in review-plan0e0064440b785e2be8bc9c869f4917557b88471e70d0e4e370499edb7e8ae31f. Existing source acceptance was scoped; this proposal asserts no behavioral or production-fit result.

Sources. Repository observer/driver/adapter and native traces; Python3.12 official socket timeout notes. Editable Typst source is retained in observations.json.render_source. Scientific graphs are unchanged; no scientific state transition is requested.