1. Cryptographic assumption attack corpus: tranche two

Statements frozen 2026-11-02; source snapshot `1b9810d54c5b11ed8030b489a5c7a5909e9864b0`.

Scope. This packet records five exact finite countermodels or controls and the hypotheses that repair their overbroad inferences. At this snapshot the statements and formal target specifications are frozen; Lean proofs, machine receipts, and independent semantic reviews are separate deliverables. No protocol vulnerability, ECDLP algorithm, or refutation of a cited primary source is claimed.

1.1. Five frozen boundaries

Target	Finite obstruction / control	Explicit repair
`ONE-SHOT-HISTORY`	Equal one-shot marginals can have correlated or complementary histories and different survival.	Supply a history-uniform survival recurrence; separately connect it to conditional events and expectations.
`CUBIC-EVAL-RANK`	At the ten distinct collinear points `(i,0,1)`, the nonzero cubic `Y Z^2` vanishes.	A nonzero determinant, equivalently injective square evaluation map, forces zero coefficients.
`COFACTOR-PUSHFORWARD`	Multiplication by two collapses `ZMod 2 x ZMod 2`; the word “cofactor” supplies no uniformity.	If `h` kills `K` and permutes `S`, the image in `K x S` is `{0} x S` with fibre size `|K|`.
`FS-ZERO-HASH`	A known constant challenge `c` accepts the constructed commitment `R=sG-cX` for every public key.	Nonzero challenge gives only fixed-equation uniqueness; extraction still needs a distinct-challenge fork.
`PEDERSEN-RELATION-KERNEL`	If `H=alpha G`, then `(alpha,-1)` is a nonzero commitment-kernel vector.	Different-message collisions reveal `alpha`; binding remains a computational hidden-relation claim.

The target types deliberately stop before samplers, transcript encodings, adversary runtimes, curve implementations, or security games. A successful finite proof can certify only the displayed algebraic or recurrence boundary.

1.2. Dependency map

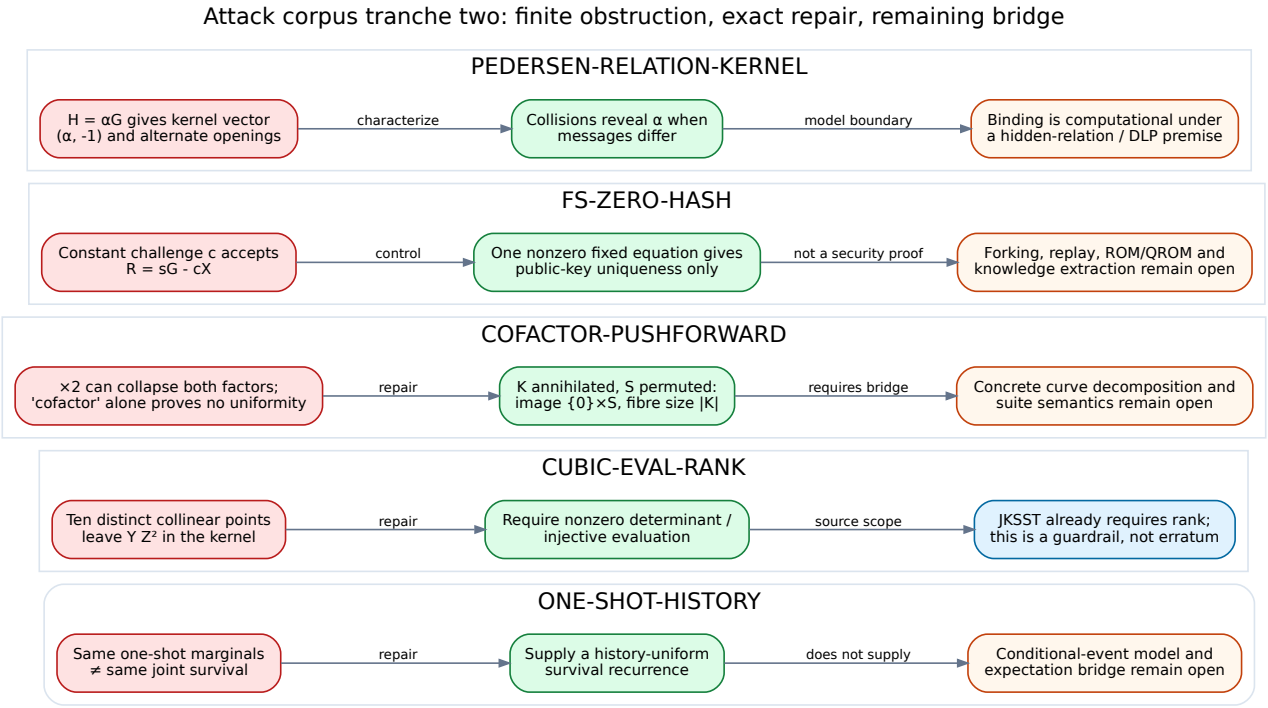


Figure 1: Red records the overbroad inference or finite obstruction; green records the exact algebraic/recurrence repair; amber records a missing implementation or security bridge. Blue marks the JKSST source-fidelity correction: the paper already requires matrix rank.

1.3. Primary-source fidelity

- **JKSST.** Theorem 4.1 is a conditional one-attempt statement. A marginal bound alone does not establish a geometric history law. Section 3.2 already requires the evaluation matrix to have rank `r` for `2 <= r <= 9`; the ten-point collinear example is therefore a guardrail, not an erratum.
- **RFC 9380.** `clear_cofactor` places points in a target subgroup, while the document distinguishes nonuniform `encode_to_curve` from the complete near-uniform `hash_to_curve` construction and permits `h_eff != h`. The finite product-group count does not refute a suite.
- **Pointcheval–Stern.** The forking argument assumes a random oracle and tracks queries, replay, random tape/oracle prefixes, successful forks, and distinct challenges. A constant hash is outside that model.
- **Pedersen.** The binding boundary is already computational: setup hides the discrete-log relation, and different openings expose it. Literal linear independence of two elements in one cyclic group is not the premise.

The retrieved-source SHA-256 values and exact passages checked are recorded in the accompanying `README.md`. This visual packet adds no independent source attestation beyond that bound note.

1.4. What remains outside this tranche

The finite statements do not provide:

- the JKSST selected-lift height/discriminant comparison, Lang's conjecture, an exact Mordell–Weil height-ball count, or the exact probability theorem replacing "approximately `(2 C2)^r / p`";
- a theorem deriving the survival recurrence from a specified adaptive probability space or equating its tail sum with expected waiting time;
- a concrete elliptic-curve decomposition, implementation refinement, or RFC suite proof for cofactor clearing;
- a ROM/QROM Fiat–Shamir theorem, forking probability, transcript parser, or proof-of-knowledge extractor; or
- a formal DLP reduction, adversary, runtime, or success bound for Pedersen computational binding.

1.5. Bound artifacts

The source note and five target specifications are the immutable statement inputs at commit `1b9810d54c`. Their SHA-256 values are:

Artifact	SHA-256
README.md	4834787c796eec875c33ca16ad75801c99102b31bbc565e0694311cc63b70a68
ONE-SHOT-HISTORY	454e43192383e8e38c465eca5b2d9827c844e1d3a3edef6207918bfcda9c037e
CUBIC-EVAL-RANK	23f3b80c1fce11658c833cc612620c35ea8ca65323d29e1022855344ba4acd3c
COFACTOR-PUSHFORWARD	4313d96609a4335cdab3da50a5bf3bb07cac3727f80652e312a80b26d8109ff4
FS-ZERO-HASH	212f836682b853cb679bab80583a8df748a2c25a5aa2a2b28448e6bc04944017
PEDERSEN-RELATION-KERNEL	73f3d6e4cf64f14906a113176614dcbad26431cd08d5598a70644b8f9797538d

Later proof or review packets must bind their exact Lean source hashes, toolchain/dependency pins, named-declaration audits, axiom evidence, controls, and hypothesis-delta tables. This source packet itself changes no ledger, hypothesis, experiment, or goal status.