Do the published base points fit a point-first selector?


27 October 2026 | T-5500 | Retained-record verification

Observation: Two of six recovered May point streams produce the published Gx on their first candidate. Four require later candidates. The wider chronology and omitted-curve pairings remain unknown.

What was checked

The existing verifier passed all 77 retained cases, including 30 matching point routes, 24 wrong-prefix/limb-width controls with zero matches, 21 large-order checks and two small controls. No legacy-library or ECPP program was run anew. All ten published full points satisfy their recorded equations.

Curve	Recovered seed	First x works?	Gx attempt
prime192v1	20000	no	2
prime239v1	20420	no	3
prime239v2	20507	no	2
prime239v3	20509	yes	1
prime192v2	20512	no	5
prime192v3	20517	yes	1

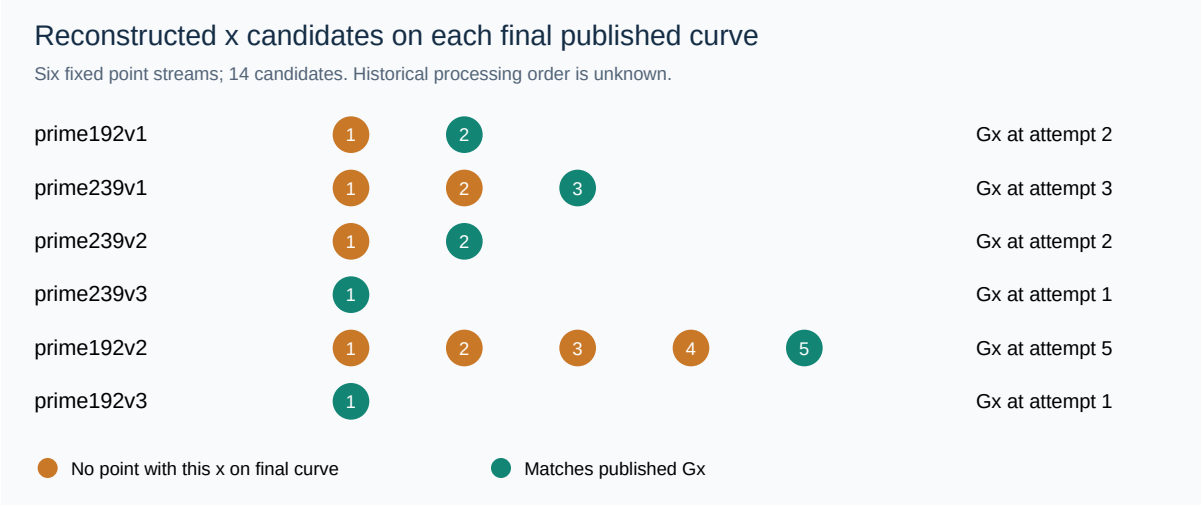


These fourteen candidate values are a reconstruction against final published curves. The eight failed memberships are not authenticated historical rejection events or eight identified omitted curves.

Inference boundary

A one-attempt rule at the recovered initializations/prefixes cannot reproduce four published points. Retrying x values on the same curve reproduces all six. A common finite cap for this reconstruction must allow at least five attempts. This does not identify an actual cap or the original control flow.

What your broader hypothesis still permits

A point stream could have advanced while the caller tried successive curve candidates. The same final x coordinates do not establish which curves were paired with earlier x values, or whether x generation preceded coefficient generation. The point recipes for P-224, P-256, P-384 and P-521 remain unknown.

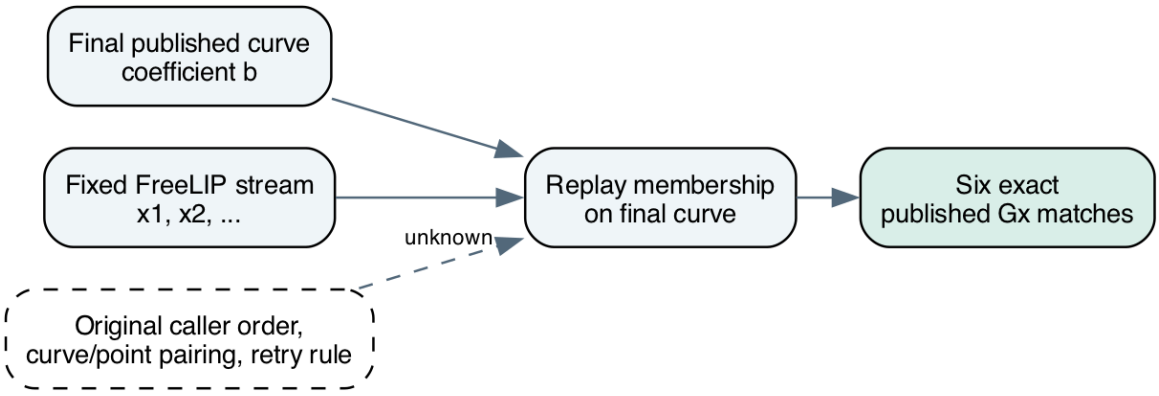

A full preselected pair (x,y), with p and a=-3 fixed, determines one compatible coefficient: b = y^2 - x^3 + 3x modulo p. Its agreement with the recovered seed/hash construction still needs explanation. Choosing only x first is a different hypothesis.

Exact identity scope

prime192v1 | recovered recipe
urn:ec-record:1:sha256:cdd1002da8b8992058e8b419334326a941a367e2e9298b81ba5759a58a3e1126

prime192v2 | recovered recipe
urn:ec-record:1:sha256:6d3064894aabfbf742aeb34e6fe0f9d8b3cd487243e283adf7470ad08821f6a2

prime192v3 | recovered recipe
urn:ec-record:1:sha256:4bb29f37591675d48b0805ec04181b0c22237f21a56c9bf32078a11b81238aa3

prime239v1 | recovered recipe
urn:ec-record:1:sha256:05c3ea5b5307bc83a37a42e8a79bdeaed732b01b42d4fb274d3aaea8f6c536d5

prime239v2 | recovered recipe
urn:ec-record:1:sha256:fa37ac33825f29e49eace88076d505bb9c04b946332fd29003c9ebac7cddeceb

prime239v3 | recovered recipe
urn:ec-record:1:sha256:5422f32365cfedfd11fa09d91e55b32c202c11b78e44a4153e2c99b3e10c25b6

prime256v1 | recipe unknown
urn:ec-record:1:sha256:bb60dc2a4430532d22dc1a27ec2f7b78068bb317ede125594ce89219e65d1e4a

secp224r1 | recipe unknown
urn:ec-record:1:sha256:db6c3a1e40ae241e8e4fb0695a6e68df7b430c74c4cc0a37e32da95808e4df10

secp384r1 | recipe unknown
urn:ec-record:1:sha256:d2e852530dd59cb7720c2e3af16270f51a4e294c89762848642da1331fdbc88f

secp521r1 | recipe unknown
urn:ec-record:1:sha256:87a5992f487705d9729eb5c559a2e6667a448b8b9d8b71cf762a9607452bde36

Provenance and next discriminator

Source: Anthropic, "Claude reveals ECDSA curve origins" (16 October 2026), its public base-point code; the committed FreeLIP prefix protocol, build amendment, actual-library records and existing verifier. Input and output digests, full candidate integers, residues and RNG states are retained in the adjacent replay files. This session reuses the existing verifier; it is not a fresh independent review.

Next: specify one historically grounded point-stream advancement and curve-pairing rule, then require it to reproduce both the published points and keep/omit sequence. No omitted-curve schedule was fitted here. The commonality objective remains unresolved.