One bounded n50 sliced D5 lift: projected quotient kills the constant

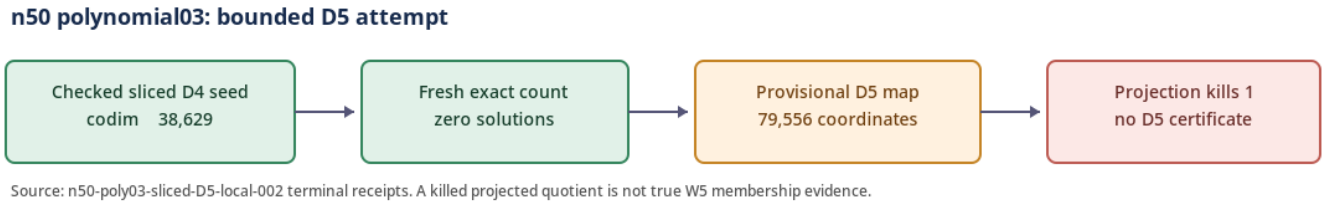

Source: n50-poly03-sliced-D5-local-002 terminal receipts. A killed projected quotient is not true W5 membership evidence.

The single frozen producer attempt on **fresh-n50-poly-03** ended with **projection_kills_one**. The provisional quotient had 79,556 working coordinates and relation rank 79,556. It emitted no D5 certificate. The fresh exact solution count was zero. This outcome supplies no LFD at least 6 lower bound and does not prove membership of 1 in the true W5 closure.

Stage	Terminal record
Fresh original count	0; exit 0
Provisional map	Constructed; 466 rewrite blocks
Relation processing	Rank 79,556; projection_kills_one
D5 certificate	None

The independently checked 49-variable D4 input has SHA-256 `2f0facb6b047c857908e7f44e8558248af426dae10454263294df1a93d39cce8`. The exact V2 protocol pinned one core, a 36 GiB child address-space cap, a six-hour watchdog, no checkpoints or retries, and a USD 12 reservation. The terminal receipt was written about 3,110 seconds after producer start.

The source-derived allocation envelope was 34,760,782,170 bytes; the admitted binary reported 35,385,141,521 bytes. Both were below the cap. The difference is preserved as an unresolved formula discrepancy; neither is measured peak RSS. A late process sample showed about 25 GB RSS.

The next proof-producing route is the checked n51 trace-sliced D4 seed. Its unit-coordinate layout and bounded native D5 profile remain to be established. A native D5 candidate, if any, needs independent D5 checking and the exact-count bridge.

Full stage transcripts, digests, run limits, and replay commands are in report.md, evidence.json, and raw/ alongside this PDF.