Trace-slice closure and finite-selector labels

2026-11-09. Symbolic research and software controls; no scientific campaign.

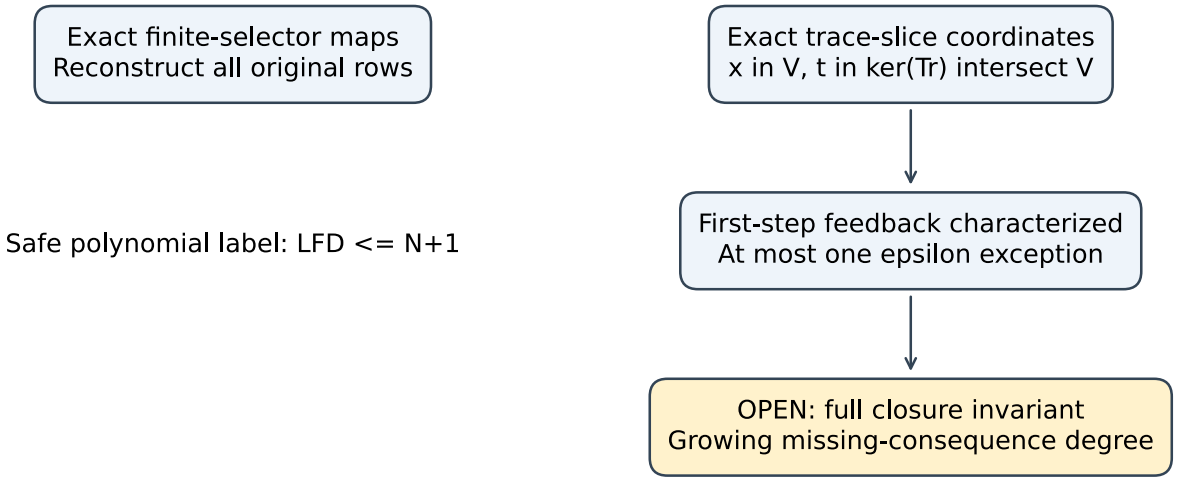

Input	Exact trace slice: x in V, t in V intersect kerTr
Derived	Complete first affine-multiplier feedback conditions
Correction	Possible epsilon multiplier space has dimension at most one
Open	Iterative closure stability and a growing missing-consequence degree

The inverse-power exclusion route has an explicit F8 counterexample. A subspace-polynomial divisibility criterion remains exact for larger fields; inverse-cube invariance requires $c2*c0^2=c1^3$. These conditions do not establish unbounded LFD.

The finite-selector CLI reconstructs nonlinear and repeated selector maps and every literal S3 coordinate row before applying the universal normalized bound LFD<=N+1. Field validation, sorted cyclic code semantics, bounds and original equations are checked. Exact LFD, FFD, solution count and whole-dataset admission remain unset.

Seven new controls plus four existing join regressions pass. The software fixture uses independent symbolic F8 polynomial arithmetic; it is not a production record. The CLI46 saved audit contains no m2 F4/F5 cell. No new scientific trials, solver calls, native builds or cloud jobs were run.

Evidence: trace-slice-cubic-parametrization.md and review; inverse-gold-subspace-obstruction.md and review; finite-selector-controls/; finite-selector-join-source-review.md. Next: control every subsequent quadratic feedback step, not merely the initial multiplier space.