Native LastFall review: conditional theorem and finite-profile boundary

Producer: crypto-autoresearcher PR 2824 at `5c405f0`. **Plan:** PR 2828, merged as `17225ce` before the three reviewer sessions.

The source and statement comparisons support the conditional LastFall theorem at their stated scope. The blind reviewer derived a counterexample to treating a truncated profile as a global last-fall-degree certificate. Exact-head hosted run `41191503149` passed the named target build and transitive axiom audit. The conditional theorem is validated at its stated scope; the stronger finite-profile exactness inference needs revision.

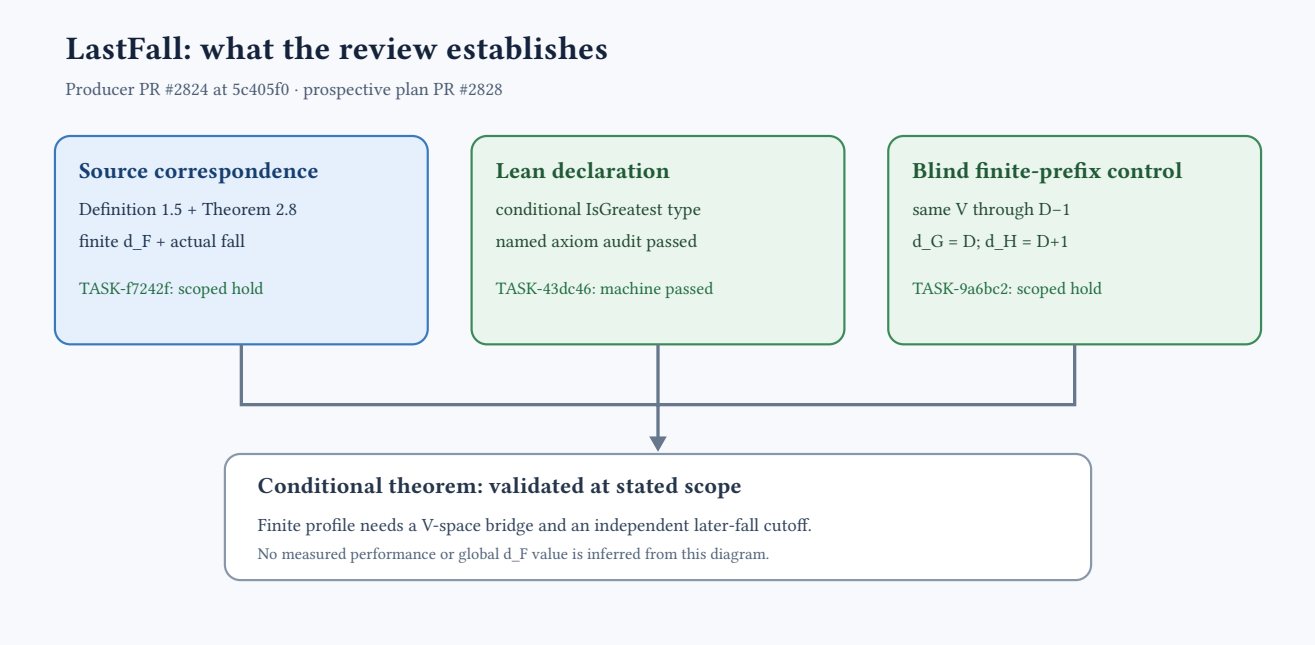

Figure 1: Three independent joints and the remaining measurement bridge.

What each joint checked

- **TASK-20261031-f7242f, source:** Definition 1.5 and Theorem 2.8 match the target's conditional claim. Empty and no-fall controls fail the fall premise; `F={x²,x²+x}` is a nonvacuous one-variable fall example.
- **TASK-20261031-43dc46, Lean:** the pinned source states a conditional `IsGreatest` result. The initial review was frozen while the hosted build was pending; a terminal supplement records the successful named target receipt from run `41191503149`.
- **TASK-20261031-9a6bc2, blind:** `G_D` and `H_D` have the same ideal `(x)` and zero closed-space profiles through `D−1`, but their global degrees are `D` and `D+1`. The prefix plus the known ideal witness gives a lower bound, not a finite upper bound.

Archive boundary

The earlier T-1105/T-1106/T-1107 packets remain historical and unchanged. This round uses native TASK IDs and separate review paths. The repository's independence checker tests ownership and declared reads; it does not itself authenticate the mathematical argument or Lean execution. No hypothesis or ledger decision is made by this technical packet.

Next: establish a measured row-space-to-closed-space bridge and a later-fall cutoff before identifying any finite profile with global `d_F`.