Certified partial-prefix search

Native output validated: True. Frozen inventory observation: mechanism_signature_observed. Eligible complete ordinary pairs: 48/48; joint partial-pruning/model-check signature: 46. Search records: 144/144; solver controls: 9/9; references: 12/12.

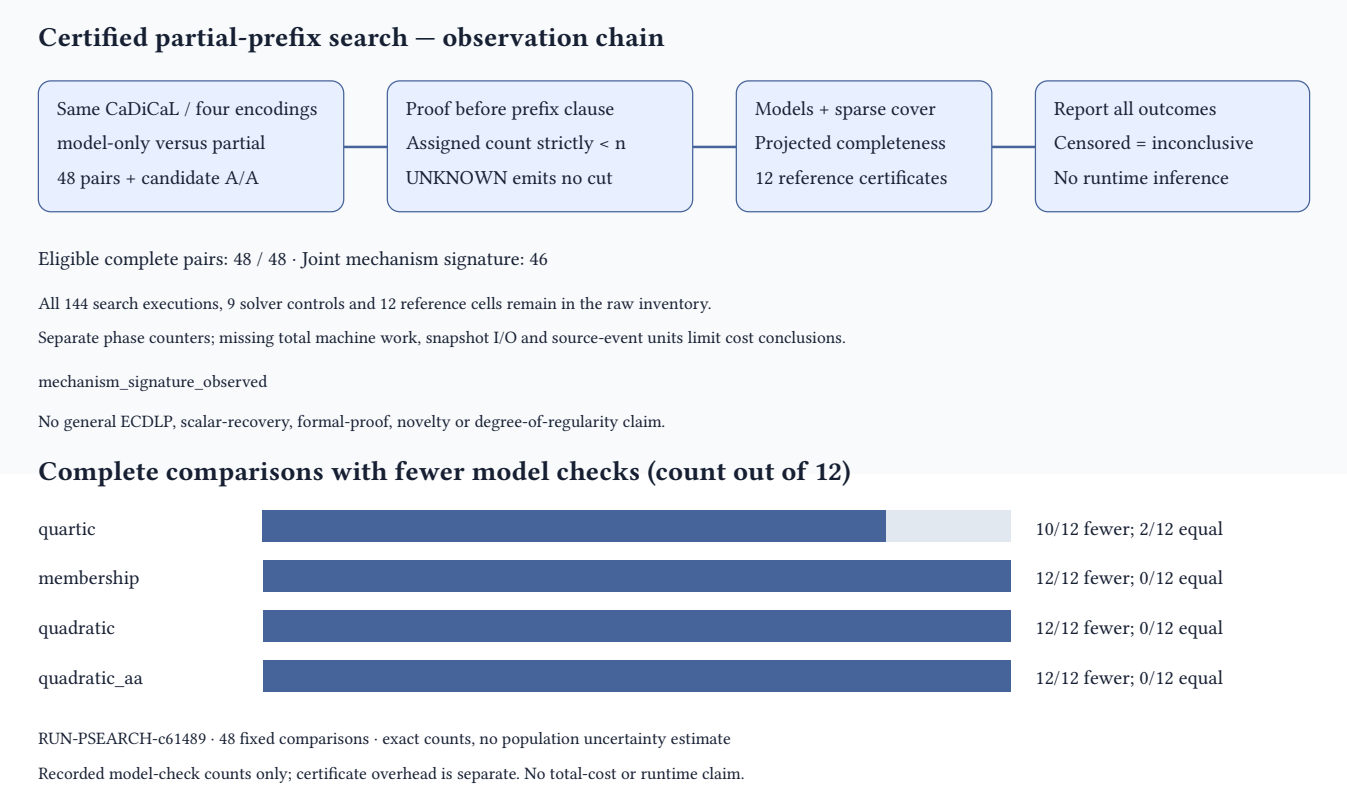

These are fixed finite search observations. Same-backend pairs change only the timing of bounded polynomial theory calls. A partial proof requires assigned_count < n and a contiguous LSB prefix. Complete results require checked arithmetic identities, validated projected witnesses and sparse coverage, with equal complementary-point reference sets. Censored pairs remain inconclusive; gaps are not roots.

Legacy arithmetic counters omit some primitive work. Reference instrumentation counts source-function and builtin pow events only. Partial snapshots serialize and fsync the evolving transcript after certificates/models; this I/O is real work, not a counted machine-operation total. Native search, construction, proof checks, verification and reconstruction stay separate. No recorded-vector difference establishes runtime or total-cost advantage.

Complete paired observations

Encoding	Complete	Fewer	Equal	More	Inconcl.
quartic	12	10	2	0	0
membership	12	12	0	0	0
quadratic	12	12	0	0	0
quadratic_aa	12	12	0	0	0

Protocol EXP-PSEARCH-3ea9fe-v1, SHA256 b66fb751d2cf5ce1899970a7476df9e5dbaad1661801694204d2dc7d803c271c. Native bundle flow and individual raw records are bound in export.json; exact per-pair differences are in analysis.json. Six export rows are packaging, not six independent samples. The 12 reference executions are charged once. Three positive-prefix, three empty-clause and three viable-prefix controls are separate solver executions; malformed-certificate/model mutations are verifier controls.

A positive mechanism observation can justify a separately admitted larger or held-out comparison after independent review. Absence of the signature applies only to this schedule, window and inventory. Invalid/censored data require scoped diagnosis; no silent replay, scale change or direction closure. Shared-coefficient search and local membership construction remain separate candidates. No scalar recovery, new regularity theorem, formal proof or general ECDLP speedup is claimed; the persistent goal remains active.

Run RUN-PSEARCH-c61489. Post-data presentation adds this run identifier and the recorded-count chart. Export packaging used the separately admitted export_packaging.py adapter to correct aggregate instance labels only; the original frozen analysis helper and scientific data remain unchanged. The failed original export and correction checks are retained.