Run report: ecbench session `ECBS1hfb0c75e0a81f` (session-rates), 2026-10-15T17:27Z

Pilot P3: capped rates at `m = 16, 17, 18` (exhausted by design). Spec `pilot/SPEC-pilot-rates.json`. Binary sha256 `c143cf62…`, commit `unrecorde`. Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). A pilot, run before PROTOCOL.md; no claim rests on it.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
rho-neg	`W27bf15e73a61`	16	exhausted	1.482e-06	4500	–	–	0.000
ic-wied	`W27bf15e73a61`	16	exhausted	0.001004	3.051e+06	2000	12	0.002
rho-neg	`W216de2c0b2b5`	17	exhausted	3.708e-07	4505	–	–	0.000
ic-wied	`W216de2c0b2b5`	17	exhausted	0.0002897	3.519e+06	2000	12	0.003
rho-neg	`W4bdb9a646cde`	18	exhausted	9.288e-08	4513	–	–	0.000
ic-wied	`W4bdb9a646cde`	18	exhausted	6.96e-05	3.382e+06	2000	12	0.003

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `pilot/session-rates/records.jsonl`. Audit receipts: `audits/`.

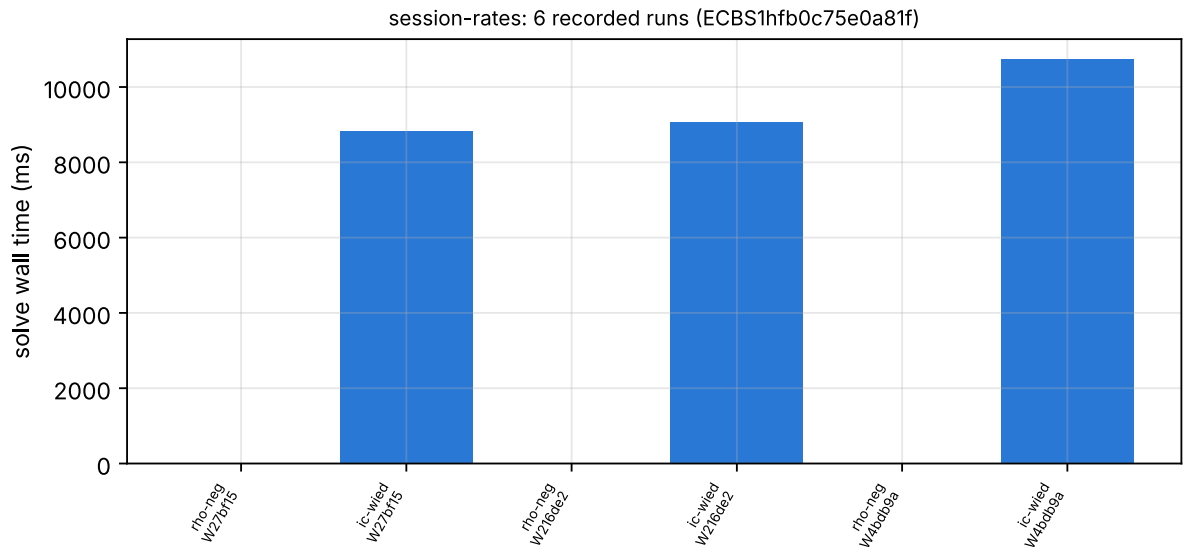


Figure 1: Recorded `S` per run, session `ECBS1hfb0c75e0a81f`.