Run report: session B (`ECBS1h0c4c69816435`)

Spec `specs/B-16k.json` (`ECS1hab3596c535bb`), commit `a75e9b407` (clean), binary `797ea0fb…e91b`, host env class `ECBENV2h6639ae09b95e` (same 4-vCPU Xeon VM), `ecbench run --wait --cpus auto`. Started 2026-10-19 18:16 UTC, finished 19:41 UTC.

Workloads 4 targets (target seed 20261019, the first four of session A's) on `icv1-fp32-t7319-90da43e9`. **Rounds** 2 measured + 1 warm-up. **Arms** `rho-neg`, `dense-16384`, `cado-16384`.

Runs 36 planned, 36 written, 36 verified, 0 failed or timed out. **Isolation earned**: IC runs L1 (hypervisor steal); `rho-neg` L2. **Audit** OK, 6 exact replays (`sessions/B-16k.audit.json`).

Measured values (means of 8 measured runs per arm)

arm	S (measured)	row_ops	LA wall	relations wall	set-up wall
rho-neg	1.014 [0.549, 1.551]	—	—	—	—
dense-16384	4109.04	613,491	22.1 s	1.15 s	194.6 s
cado-16384	4109.04	918,135	6.12 s	0.92 s	193.0 s

Wall times are descriptive (L1, and fewer than 5 rounds by design). Derived ratios are in `analysis/B-16k.json`.

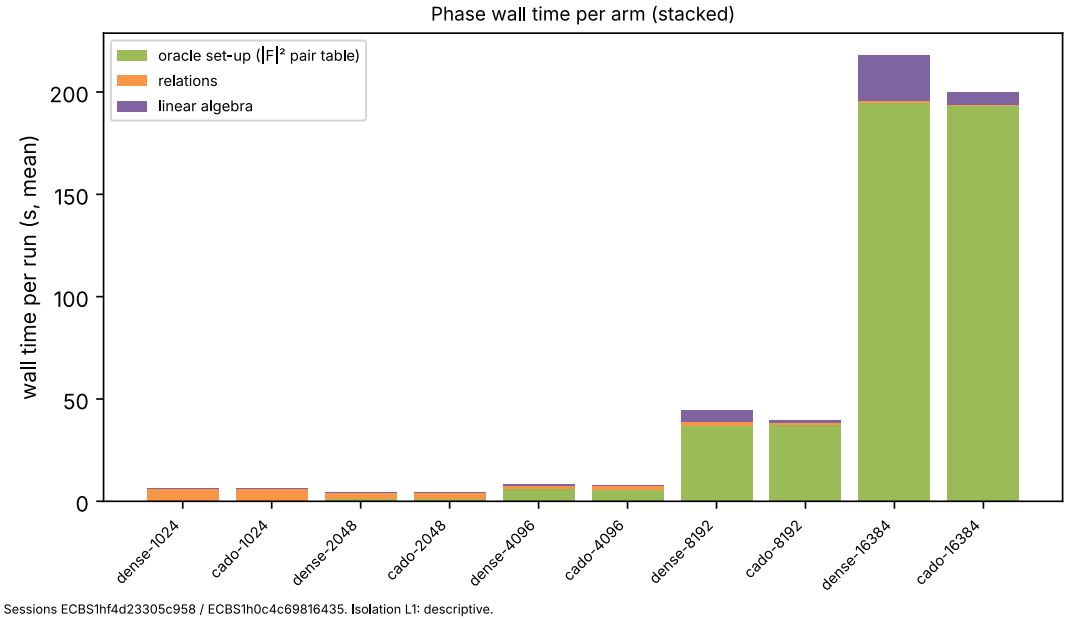


Figure 1: Phase wall time per arm, sessions A and B (this run: the 16,384 bars).

Records: `sessions/B-16k/records.jsonl`. Observations only.