
Self-test planning observations — not a performance result

29 October 2026. After an uploaded checkpoint, preflight 001 failed before a control executed: external /usr/bin/time was absent, exit 127. The fresh preflight 002 uses Bash's time keyword. It ran the producer self-test twice under the positive/production planning labels, and the verifier self-test once. All three actual planning calls exit 0. No real-cohort input was read.

Observed elapsed values were 0.005, 0.004 and 0.024 seconds respectively, one observation per phase, resolution 0.001 seconds. The exact controls check small residue tables, planted separation/nonseparation, six toy label assignments and PARI positive/negative/zero symbols. These different control calls do not compare algorithms on the same computation. No spread, confidence interval, speedup, fastest-tool comparison or isolation tier is admitted.

The explicit planning model 512*(positive+production+4*verification) gives 53.76seconds. This is a heuristic allowance, not measured NIST runtime or a mathematical upper bound. Actual limits remain30/120/120/30/30/30seconds. Actual-cohort phases have no admitted performance clock.

The host is the shared local environment used for exact analysis; no quiet core or reservation receipt exists. Source: preflight-runtime.json, preserved 001/002 directories in the preparation and full raw archives. Both attempts remain separate. Raw control timings are documentary planning observations, not new benchmark admission. Browsing copies of this PDF/SVG/150-dpi PNG are regenerated in benchmarks/20261029-strict-elkies-preflight/ and remain outside its admitted-results table because no timing validation or matched rho reference exists.

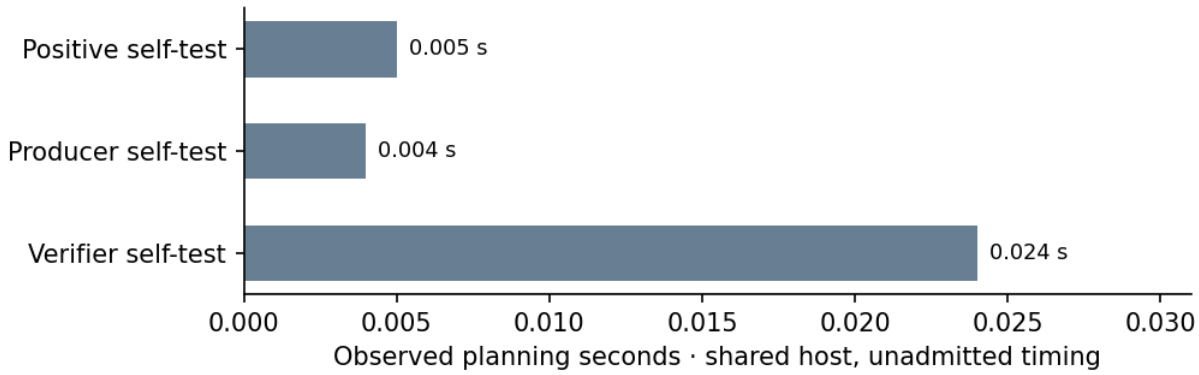

Preflight 002 · n=1 / phase · 0.001 s resolution · no measured spread or actual-cohort runtime