run-20261022T0916Z-quartic_twist_mixed_polynomial_ic_k12_p37_aa_v1

Raw: quartic_twist_mixed_polynomial_ic_k12_p37_aa_v1.json | SHA-256: c100b1d1e32e41dd0a34e0a9f40322d4290aa0dbbddc5b8fa5c6aefe4afe264d Current source SHA-256: cb1caa67733660b09271eca8b0fbc6a72307f28c59a8eafb1bf79e3432f1d24e Measurement source: frozen source commit ade6c1916; current source SHA below is a rendering-time snapshot. Intel Xeon Platinum 6975P-C; shared host; L0 exploratory run. Public target [271]G; p=37, b0=2, r=1873633, seed=0.

Execution

`target/release/examples/quartic_twist_mixed_polynomial_ic research/twist_index_calculus_20261020/quartic_twist_mixed_v1.ndjson --patterns=1,2` Cap: 8 GiB address space, 1200 s watchdog.

Recorded observations

- Status: pass; anchored rank 4/4; recovered scalar 271.
- Processed 7 frozen residuals and retained 4 rank-raising signed relations; all factor logs verified.
- Counted IC: 154,272,224 Fp multiplications; 7,619 group operations. Same-process twist24 rho: 348,941 Fp multiplications; 2,745 group operations.
- Final-source A/A control: compare all non-timing JSON fields against the other final-source repeat. The initial pilot source is preserved separately.

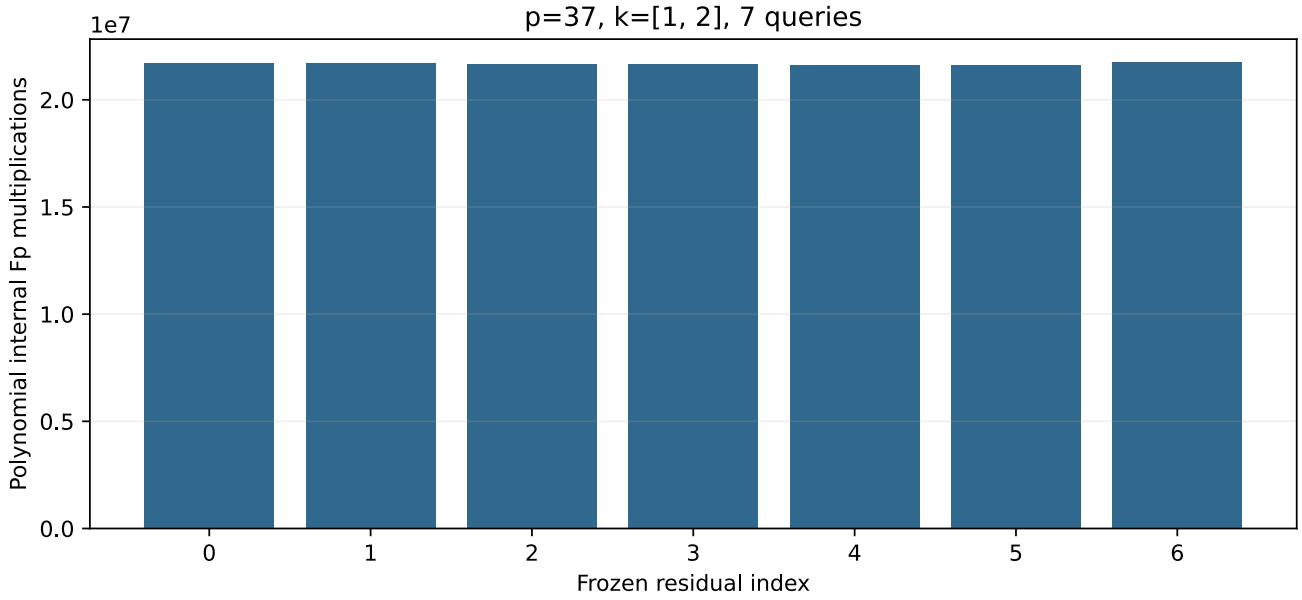

Counted native field work only. L0 wall time is not isolated; native hash, allocator and partition CPU are missing. No priced IC/rho speed claim.