
Root-library v4: eighteen failed rows, source triage

Read-only inspection identified absent runtime prerequisites for every one of the18 observed failed rows: five Certicom device tests require gpu/certicom/emulator.cpp; thirteen ecbench tests require retained record/audit/verdict/bound/rule-v8 fixtures. None of the listed paths is present in private SOURCE or the initial immutable manifest. The Certicom source searches all five source ancestors; no matching emulator.cpp exists at any of them.

All eight affected Rust test source files are byte-identical to published base29861c9a55f9ae5a33e1e09b3866aa397fbde605 and their c5178 manifest entries. This provides a concrete source/materialization diagnosis, not a completed repaired test result. The live stdout currently supplies FAILED rows but has not yet emitted final panic detail. Preserve all18 failures; correlate final native panics before concluding the actual runtime cause per row. C++ compiler availability is downstream of the absent emulator source and was not tested.

Next: first read final native panic details. Only if absent, consider the explicit60-second cached-binary diagnostic proposal; do not rerun a full suite or compile for this diagnosis. Repair requires a separately reviewed immutable fixture extension at the exact base, preserving original failed tree and receipts. The existing binary embeds CARGO_MANIFEST_DIR, so adding a different directory without a reviewed path strategy will not redirect these reads.

Sources checked (KB unavailable): exact eight Rust test modules, runner.rs read_record_lines, immutablec5178 manifest, base29861 git blobs and live failure-output prefix. This is source triage, no experiment or test invocation. No fixture copied, no compiler invoked, no mutable cache read.

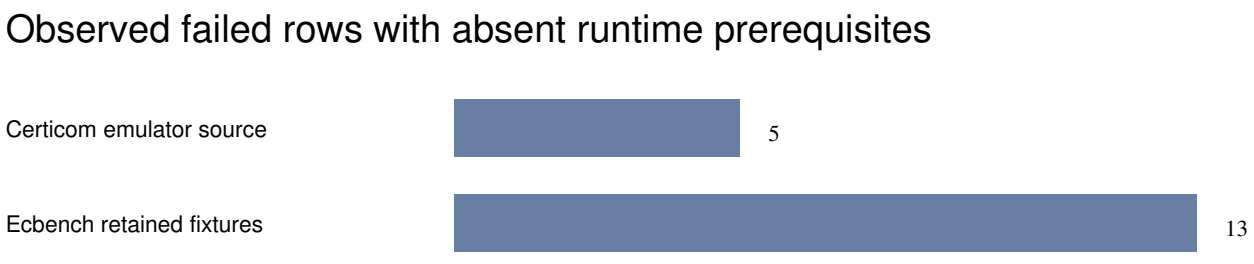

Source triage; final panic correlation pending. No repaired test run.

Broader runtime prerequisite audit

A bounded scan of the private library source excluded src/bin targets and inspected CARGO_MANIFEST_DIR references, filesystem reads and explicit retained-path literals. Additional unconditional dependencies occur in ecc chain-set tests, ic_framework archive/plugin tests, and the planner's15 cited-file checks. Guarded ecbench audit/record/spec/runner fixtures and endomorphism native fixture directories are separately classified: absence can return early rather than establish retained-data validation. Compile-time include_str/include_bytes prerequisites were distinguished from runtime reads; this is not an exhaustive proof for arbitrary computed paths.

additive-inputs-proposal.json binds135 currently absent files totaling41,117,354bytes to exact published base29861 git blobs and SHA256. All selected paths resolve in that base. No fixture bytes were written into the source tree. The gpu/certicom subtree includes emulator.cpp and its local headers; no C++ compilation was invoked. A future environment stage must also bind C++ compiler and standard-library prerequisites, because these five Rust tests compile their host emulator at runtime.

Do not mutate c5178 or erase the18 failed rows. Proposed repair uses a fresh private fixture/source view and a reviewed read-only mount at the existing binary's compiled CARGO_MANIFEST_DIR. Source bytes must remain exact and the additive input manifest must be separately checked before and after the attempt. Materialization and runtime are separately charged; no allowance is assigned by this source proposal. A newly compiled root is unnecessary solely to redirect fixture reads if the bounded private mount view is correctly established. Existing cached binary/hash, terminal custody and resource limits remain required.

The60-second diagnostic proposal is only for obtaining missing native panic details with fixtures still absent; it is not the repaired18-test protocol. Repaired tests have different runtime work (including the C++ build and recorded-fixture replay) and need a prospective separately sized runtime allocation. No test passes are inferred from the source audit.