F5 criterion: allocation history

Matching frozen Boolean allocation suite: 8 seeded systems, 3 repetitions, 24 calls per arm and revision. Polynomial dimensions, degrees and seeds are retained in the source audit protocol.

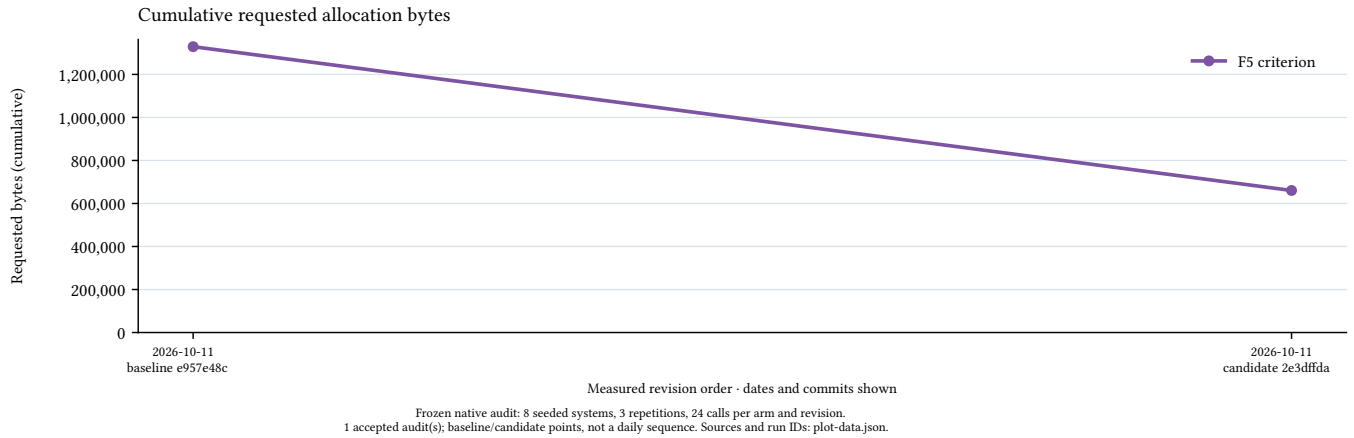

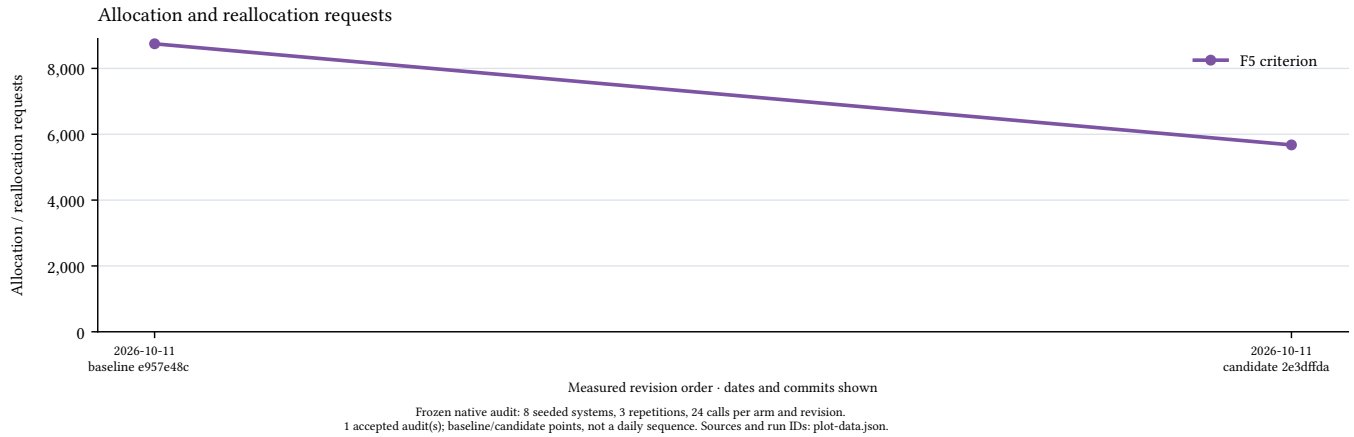

UTC date / revision	F5 criterion bytes	F5 criterion requests
2026-10-11 / e957e48c	1,329,024	8,748
2026-10-11 / 2e3dffda	660,480	5,676

Native allocation audit. Original baseline/candidate rows, accepted comparison, exact outputs and accounting, shared inputs and all totals revalidated by the Rust plot-data tool.

One baseline and one candidate point per accepted audit, not a daily sequence. A/A and replication pairs are controls, not additional algorithm revisions.

Bytes are cumulative requested traffic, not peak memory. No timing is measured by this allocation series.

Criterion construction is a separate part of F5 and is never compared as a complete solver.

Audit revisions come from their frozen records. They are not inserted as measurements of historical CI workloads; the workloads and metrics remain separate.

Evidence: allocation_sources in plot-data.json; frozen native comparison and baseline/candidate JSONL records in research/f4_f5_row_build_20261011/records/. Source data and provenance: plot-data.json and REPORT.md. These plots do not establish an end-to-end ECDLP gain.