Finite-difference accounting: policy review

T-1528 | non-author, context-informed | source review only

Accepted at the local finite-event boundary. All seven source/policy bindings match. Prior producer context was available; this is not a blind review or scientific admission.

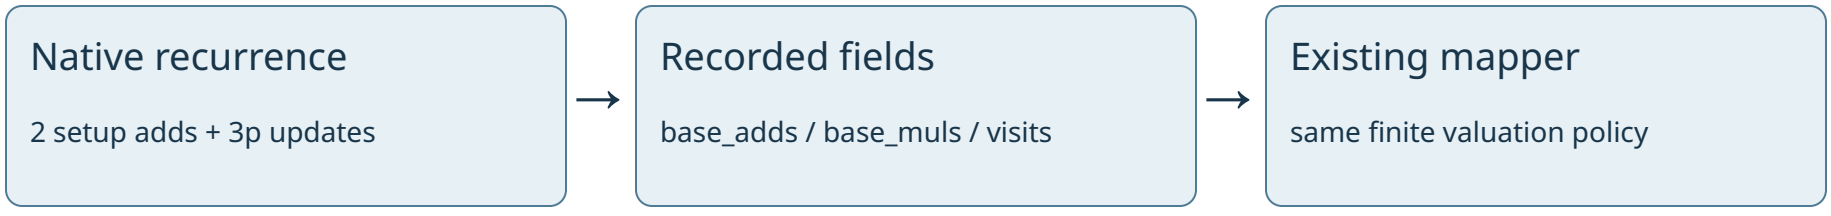

Candidate minus original: symbolic counter differences

Degree	Multiplications	Additions	Entry visits
0	-p	2*p+2	-(p-1)
1	-3*p	2	-3*(p-1)
2	-5*p	2-2*p	-5*(p-1)

Degree zero and one increase additions. The native caller selects degree two. The final unused update is counted. These identities do not supply measured prices or timing ratios.

Policy correspondence

Active coefficient loads count once. Local scalar copies preserve the original peval read convention and create no collection elements. Padding does not consume inactive array entries.

Bounds and Option checks are access mechanics under the existing API/control convention. Algorithmic predicates still count at their selected sites. Exclusion from this finite event inventory does not assert zero machine cost.

The mapper already consumes the affected counters. Inverse normalization remains separate; the removed Horner multiplications are outside inverse expansion. No new valuation coefficient is introduced.

Remaining bindings

Final integrated-route category coverage, source/binary/protocol/reference bindings, fresh 1,260-target candidate results and complete resource evidence remain required. Historical prices are unchanged. Mathematical proof review is separate.

Source hashes, findings and disclosure: review.json. Review table: classification.csv. No tests, compiler invocations, scientific trials or new ratios were produced in this review.