N83 complete adjacent-K cold screen

Run 38978215742 · 16 October 2026 · one exposed public target

Twenty-one fresh IC processes cover all 19 integer K values from 1102 through 1120. The original analysis records K1107 as the descriptive cold-process minimum at 116.222 seconds, followed by K1112 at 117.262 seconds. This is an exposed-point screen with a null promoted candidate. It nominates a later comparison; it does not establish a fresh-target selection.

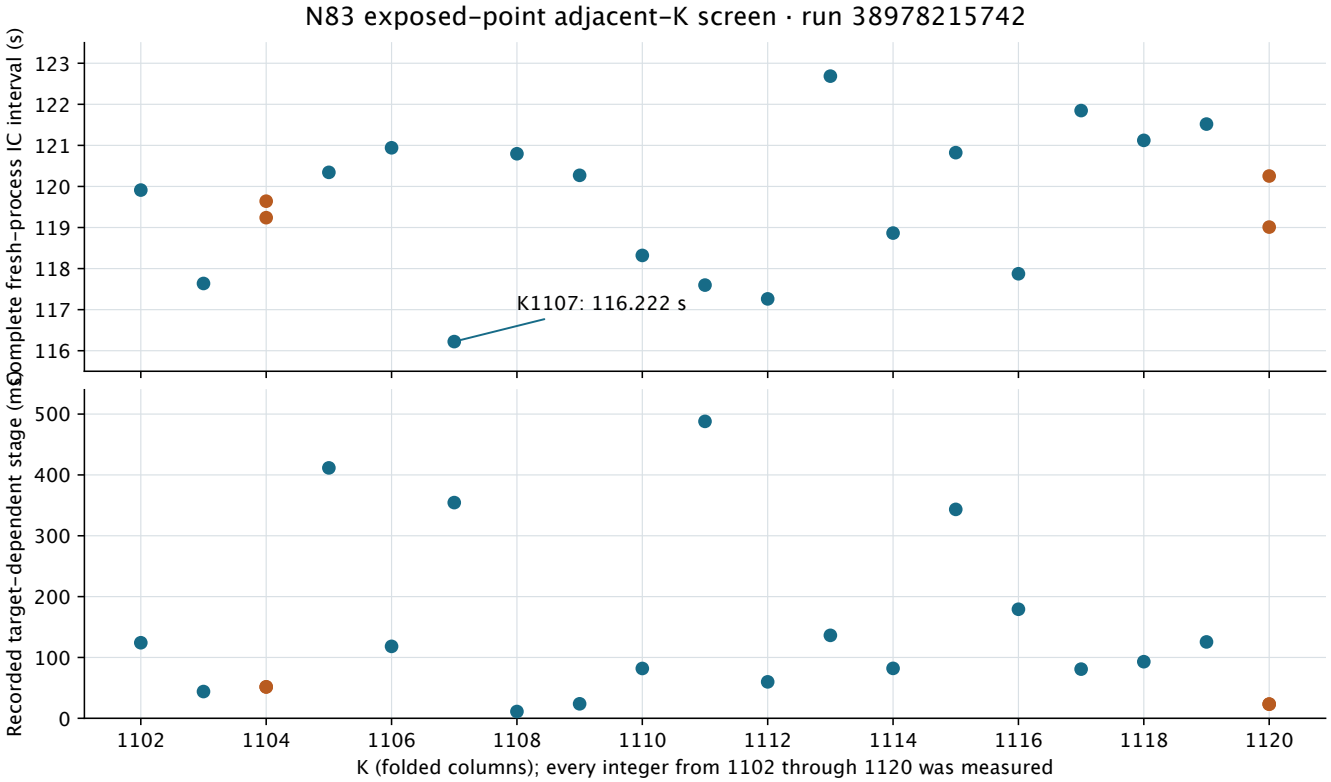


Figure 1: All 21 recorded IC observations. Orange dots are the K1104 and K1120 A/B bookends, with two processes each; blue dots have one process each. The cold-time axis is cropped. The lower panel is a separately recorded stage, not the complete process. No confidence intervals were estimated.

K	Cold process, s	Online stage, ms	Processes
1107	116.222	354.511	1
1112	117.262	59.898	1
1111	117.598	488.007	1
1103	117.637	43.962	1
1104	119.440	51.613	2; A/B mean
1120	119.632	23.300	2; A/B mean

The table reproduces the original result's selected rows; the graph includes every process. Measured milliseconds are divided by 1,000 for seconds. The two control means are derived summaries already recorded by the verifier. K1104 and K1120 have recorded relative A/B spreads of 0.336% and 1.039%, respectively, both below the frozen 5% threshold. Their repeated base and root-index identities match. The cold minimum and the smallest target-stage measurement occur at different K values; those accounting intervals stay separate.

Workload, schedule and host

The curve is `EC1N83Ckb1a1haacb69ee9f37`, workload `eebf98ee1031`. The dynamic root11 layout is fixed throughout. Each process constructs an empty base, index and log cache for one previously exposed public target. The usable base contains 166 K points and K folded columns. Rank seed 29, four rank threads and one target thread are fixed. The schedule begins with K1104 A and K1120 A, runs the other 17 K values in ascending order, and ends with K1120 B and K1104 B. One same-point rho process follows.

The IC cap is 360 seconds per arm and the rho cap is 120 seconds. All 21 IC arms and the rho arm completed. The archived host exposes four AMD EPYC 7763 CPUs and 15.61 GiB memory. The verifier records `cloud_instance_exploratory`; topology, affinity, cgroups, telemetry and resource receipts are retained. No stronger host-isolation tier is claimed.

Accounting and evidence boundary

Cold process time includes setup, relation-rank work and target processing. The five exclusive target-dependent online phases are retained separately in the exact IC1 rows. Same-point rho recorded 720.959 milliseconds online. The original study classifies the online values as stage diagnostics from this cold experiment; a primary online comparison requires its own matched fresh-point panel. No cold/online ratio is presented as a speedup. This screen also has no fastest-external-tool comparison.

Source and custody

The exact cloud execution commit is `77a6090773b49ce45c7377d82853924722898bcd`. The IC example SHA-256 is `8a2fe55dd90dc33892c197d27260182bf783fc8212fb485d8297daf2bbba8e12`. The source and both executable hashes are copied unchanged in `raw/source.json`. The provider ZIP SHA-256 is `b07cef5779312fed6fb49c2af767d5d2c8cbdc1eca6c14de85ddd6753fb6290f`. The archived analysis SHA-256 is `d4ad13279592ae82086c5ea04cf97348a98b692d559f1847af270b8caed065f0`.

The original independent replay exited zero, had empty stderr and reproduced the archived analysis. During report completion, the materializer rechecked the ZIP digest, all 180 result members, source/host/target identity, the retained replay logs, 19 candidate manifests and 21 run rows. This is a fresh custody check using the recorded replay; it adds no new timing measurement. The raw receipt copies and `provenance.json` retain exact bytes, hashes and the archive location.

Interpretation and reproducibility

The frozen result is `SCREEN_COMPLETE` with `selected_candidate_id: null`. The original next gate compares root11 and root22 at K1107 and K1112, before the separately sealed sixteen-point holdout. The primary leaderboard, progress timeline and performance-gains figures receive no new admitted point from this exposed-point screen. The benchmark entry records the observed grid and its limitations.

Protocol and result: `../../PROTOCOL.md`, `../../RESULT.md`. All 21 observations and exact candidate identities: `../../ic1_rows_38978215742.json`. Provider run: 38978215742. Render with `python plot.py`, then `typst compile --root ../.. report.typ report.pdf` from this directory.