The special-fiber norm equations force the origin

2026-11-13. Source freeze `5e342cafb852fe15d8744969dbd6de04f3561e77`; literal-issuer correction `aec2bb861`. All claims unsigned [pcc:unverified].

The explicit pole-scaled norm/membership family now has a Lean implication: at parameter zero and Dickson depth4, vanishing of the four nonconstant remainder coefficients forces `a1=a2=c0=c1=0`. The result holds over every field, including extension fields. The family at parameter one recovers the original symbolic target-completed norm quotient and Dickson master. This establishes a precise zero-set fact for the explicit family; its use as the actual reduced input's weighted initial system still needs a faithful coefficient/filtration binding [pcc:unverified].

Central claim: `PCC-20261113-7b7707`. Proof source, protocol, claim map, editable diagram, SVG, PDF.

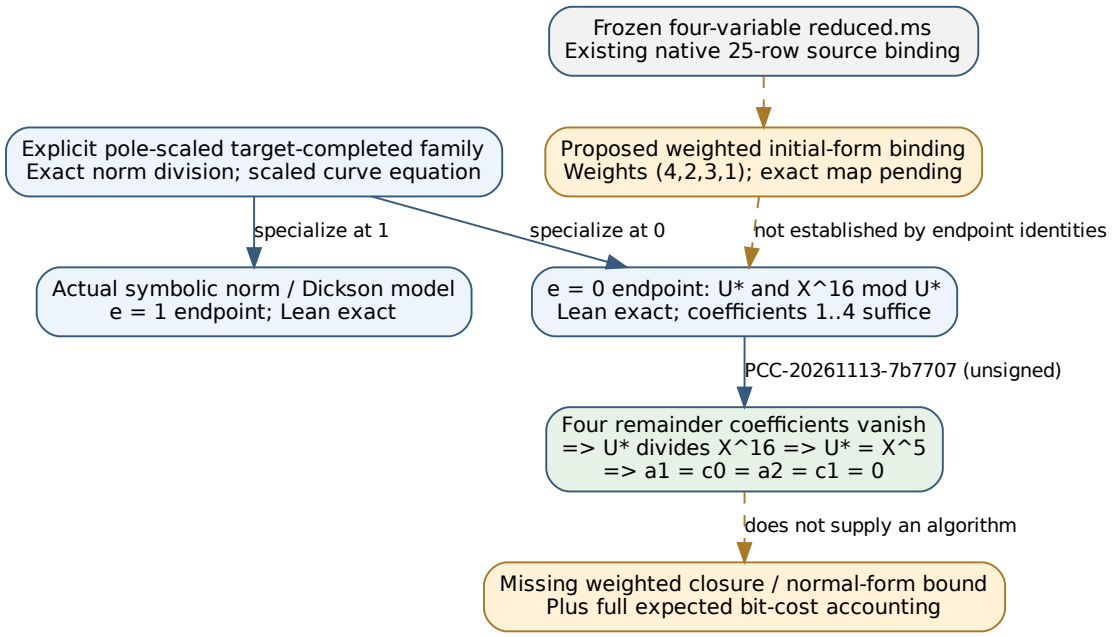


Figure 1: Constructed family endpoints and the still-proposed initial-form bridge. Solid arrows correspond to Lean endpoint/implication results; dashed arrows are unresolved. All evidence is unsigned.

Construction and readable proof

Use the retained coefficient order `(a1,a2,c0,c1)`, proposed pole weights `(4,2,3,1)`, and X weight2. Put `D=X^3+a2*X^2+a1*X`, `B=c0+c1*X`. For parameter e, curve `f_e=X^3+e^4*a*X+e^6*b`, target `(q_e,z_e)=(e^2*r,e^3*z)`, and original curve equation `z^2=r^3+a*r+b`, the scaled target lies on `f_e`. Use the existing actual `completeTarget` operation:

```
A_e = D + (z_e*B(q_e)-D(q_e))
U_e = (A_e^2-f_e*B^2) div (X-q_e).
M_0 = X; M_(n+1) = M_n^2-2*e^(2^(n+2))
R_e,n = (M_n-terminal*e^(2^(n+1))) mod U_e.
```

The norm division is exact. At e=1 these are the original symbolic norm quotient and Dickson recurrence; at e=0 the exact norm identity gives

```
U* = X^5 +(2*a2-c1^2)*X^4 +(a2^2+2*a1-2*c0*c1)*X^3
     +(2*a1*a2-c0^2)*X^2 +a1^2*X
```

`R_0,4 = X^16 mod U*.`

`U*` is monic of degree5 and has constant zero. The remainder has degree below5; its constant is zero because both dividend and divisor vanish at0. Thus its four nonconstant coefficient equations imply the whole remainder is zero. Consequently `U*` divides `X^16`. The prime-power divisor theorem and monicity give `U*=X^5`. Comparing coefficients, first `a1^2=0`, then `c0^2=0`, then `a2^2=0`, then `c1^2=0`. A field has no nonzero nilpotents, so all four coefficients vanish. No characteristic restriction is needed. The actual remainder criterion also has a converse at every exponent n>=5 [pcc:unverified].

The zero tuple of this special fiber is not a recovered solution of the original parameter-one problem. No theorem transports that tuple across the family, assumes flatness, proves regularity or supplies an efficient finder. A weighted homogeneous zero-set argument and a low weighted last-fall bound are distinct obligations [pcc:unverified].

Checks, failures and experiment boundary

The module has18 new statements. Build007 records standard foundations `propext`, `Classical.choice`, `Quot.sound`; full gate/fresh outcomes and artifact hashes are retained in the accompanying validation receipt. The module uses standard `import all` access to existing definitions; no earlier mathematical source, checker, dependency pin or gate changed [pcc:unverified].

Literal certificate `IDC1h0e1e85cab8ff464b`, claim `PCC-20261113-027206`, encodes only `(X^3+a2*X^2+a1*X)^2-X^3*(c0+c1*X)^2=`
The unchanged issuer/checker accepts32 statement-derived and16 extra points. It is unsigned and does not certify the geometric implication, Lean execution, initial forms or a solver. The first issuance rejected degree6: ordinary syntactic degree is7, from `X^3*(c1*X)^2`. Its failed log/exit is retained under `PCC-20261113-aea26a`; the correction changed no expression or mathematical acceptance criterion [pcc:unverified].

The adapter's22 canonical tests and format/build pass in the saved receipts. Strict clippy records four `chunks_exact_to_as_chunks` style failures in the unchanged canonical SHA256 under Rust1.99.1. No suppression or canonical source edit was made. Old source/evidence/claims remain intact [pcc:unverified].

The fixed native fixture-to-leading-form experiment did **not** run. Flow: planned1, attempted0, completed0, excluded0, admission-blocked1. Checkpoint gate first required a resume; after supplying it, upload transport was unavailable: no configured profile or checkpoint token. Both failures remain. The tracked root resume belonged to another study and was restored; this task's resume is saved under `weighted-leading-evidence/`. No AWS/vault request, paid job, F4/msolve, branch search or performance measurement occurred. Local Lean proof checking and literal algebra certificate issuance are mathematical construction, separate from that unlaunched experiment [pcc:unverified].

Sources and next discriminating obligations

Sources checked (KB): unavailable as already recorded. The bounded direct fallback and precise URLs are in prior-search-receipt.json. Read ml-cryptanalysis at `8020e131a1a3806531d695b6bc7586473802dada`: formal README and actual Closure/VariableClosure Lean sources. Full iterated closure permits multiplication of newly derived low-degree rows; static Macaulay multiples alone do not establish its closure. Those existing ordinary-degree results are not new weighted ECDLP bounds [pcc:unverified].

Read Faugere, Safey El Din, Verron, arXiv1412.7547v2, section3.2 equation11, Theorem12 and section4. Weighted bounds have regularity/homogeneity/position hypotheses and add input degrees; they do not automatically bound a solver by its maximum input degree. The proposed weights are not reverse chain-divisible. Neither theorem is applied to the concrete source here [pcc:unverified].

1. Prove the exact pole-normalization/filtration map, or complete the frozen symbolic fixture binding once checkpoint upload admission is available. The predicted residual weights24,26,28,30,30 remain predictions.
2. Establish a weighted normal-form/iterated-closure certificate with finite budgets. A low degree at one fixed fixture is not an asymptotic bound.
3. Prove a growing-family weighted last-fall bound and include decomposition yield, finite-field extraction, supplied-label relation collection and all expected bit costs. No generic regularity assumption fills this gap [pcc:unverified].

The original W-jet/rank proposal remains a separate family without a faithful public map. No jet/rank attack or non-generic lower bound follows here. Existing global scoreboard, timeline and curve diagrams remain unchanged: this component has no new measured speed or certified transport edge. The study-local diagram explicitly separates constructed endpoints from the proposed weighted-initial-form bridge [pcc:unverified].