Separate rho preflight: twelve verified calls

SessionECBS1h9cd21a0011c9 completes12/12known-answer executions and 12/12identical deterministic replays. No failure, timeout or interruption. Four registered generic prime-roster curves, one target percurve, one measured round, three arms: negation, plain and same-seed negation A/A. No warmup. Frozen protocol3892337a, sourcecommit1214cbda before data. [pcc:unverified]

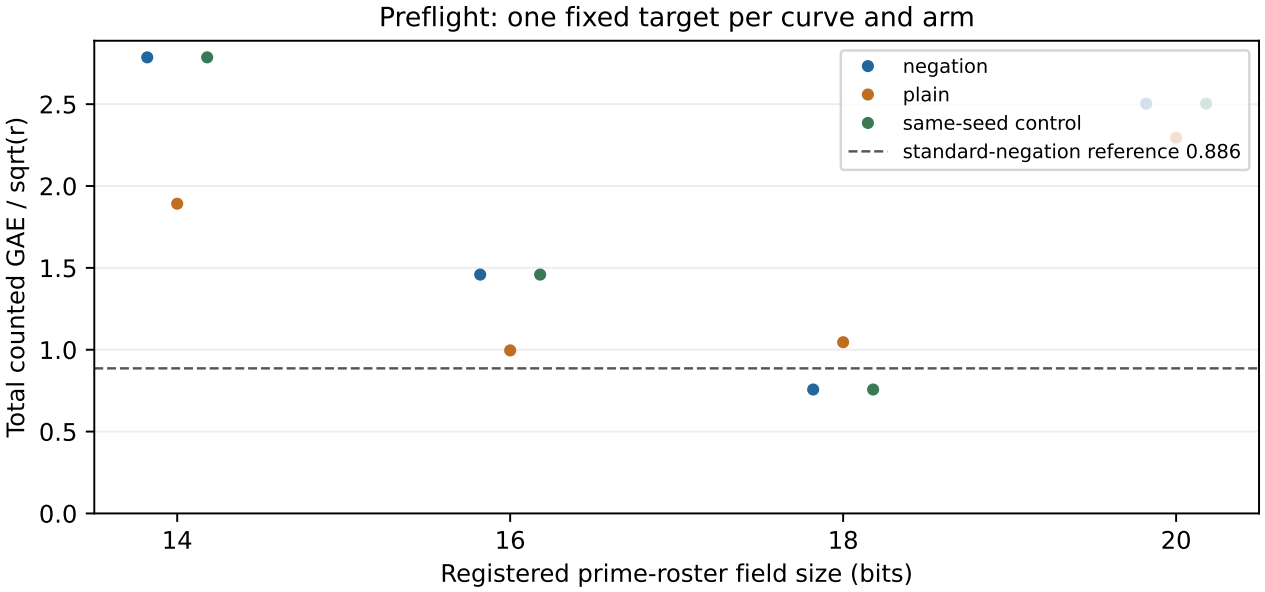

Figure 1: Native recorded preflight values: one fixed target percurve/arm, no uncertainty interval. Costs are cold countedGAE/sqrt(r). The dashed standard-negation reference is a model, not a universal lower bound. [pcc:unverified]

All12answers and12replays pass. Four same-seed A/A pairs have identical counts. The fixed native analysis commands all exit0. Complete pilot export flow12planned/attempted/completed,0notcompleted/interrupted/resumed/excluded; file/contract validation passes. Every scientific clock is invalid. Counts only, no time/speed/asymptotic conclusion. [pcc:unverified]

The canonical adapter draft omitted frozen analysis metadata and remains unchanged/unvalidated. A new write-once completed export adds the actual executed script and output hashes; all native rows are unchanged. Pilot targets/seeds are separate from main and never pooled. Main population, methods and seeds were not tuned using these outcomes. [pcc:unverified]

Actual release binary61030c23 and3,098source/input matches to baseline 1d2ad3fd are pinned in the full protocol/build provenance. No independent- machine or signed-execution claim. No paid compute/storage. Native source read scopes and assurance limits are in the study README. This is a pipeline/ budget preflight, not a test of the limiting0.886constant. [pcc:unverified]