R102: N51 coefficientwise clearing at x=1

5 November 2026 | Koblitz modular IC research

The actual R51 N51 relation has 105 distinct rational coefficients.
Exact F2[x] division by x+1 found all 105 displayed orders negative.
The minimum is -9, attained by 22 terms; the maximum is -1.
Thus (x+1)^9 is the least coefficientwise clearing power; power 8 fails.
The donor hash, monomial grid, malformed-coefficient control, and fresh byte-identical replay passed. Hasse coefficients independently matched all 105 orders. Lean 4.34.1 checked the reported bound and minimum.

Orders of the 105 displayed N51 coefficients at x=1

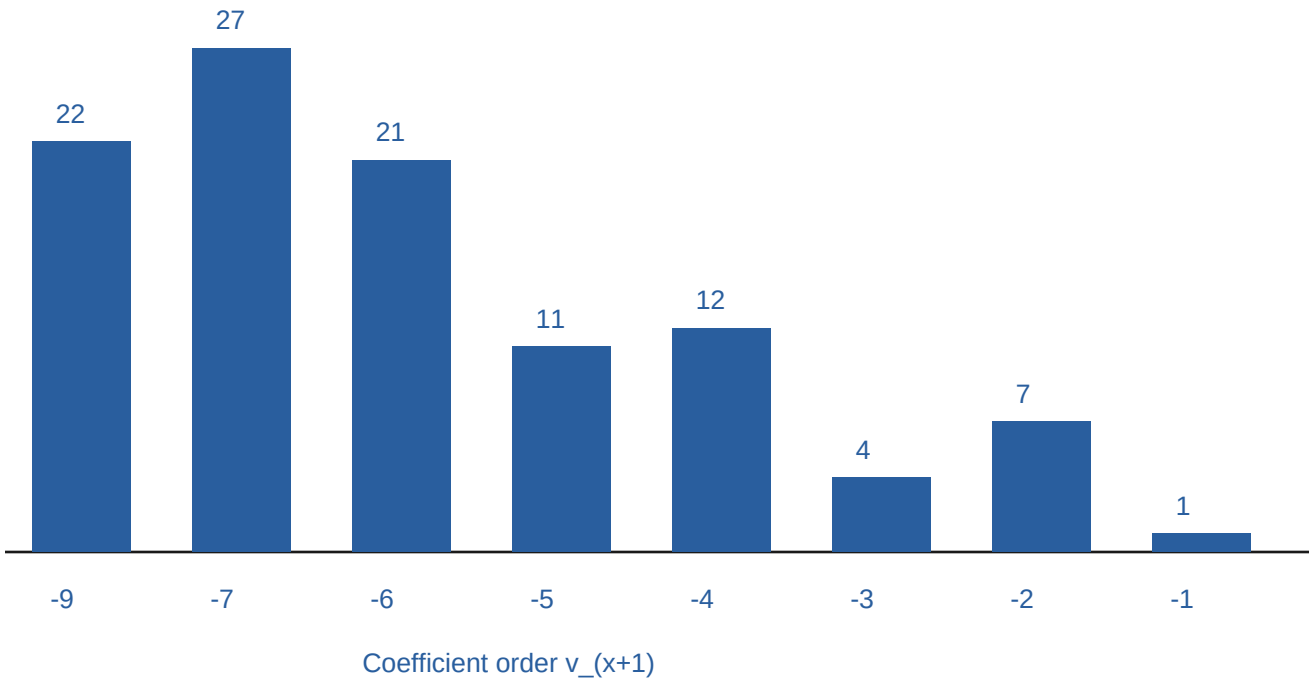

This coefficientwise bound is not a normalized function valuation.
Next: reduce (x+1)^9 n at the two R101 source-order points, then compute integral closures and branch valuations.
Raw archive SHA-256:
554e9e6fab5c216b3f4964e9c505970544cac5a9ad0059fc6694c23c79ae38e4